


CSMH008

Part Number



- Direct feedback after decoding (vibration, visual/acoustic signal)
- Quick alignment and capture of 1D/2D codes
- Resistant to cleaning agents

These wenglor handheld scanners are suitable for mobile reading of 1D and 2D codes on a wide variety of different materials. Good scanning results are even obtained with poor code quality. Readable code types: DataMatrix, DataMatrix rectangle extension, QR codes, micro QR codes, QR model 1, Aztec code, PDF417, composite, Grid Matrix, Maxicode, micro PDF417, PDF417, code 11, code 32, code 39, code 49, code 128, interleaved 2 of 5, Telepen, MSI Plessey, Plessey, Pharmacode, UPC/EAN/JAN, Codabar, Codablock F, GS1 Databar, GS1 composite, Planet, Code93, BC412, Postal Codes, Trioptic.

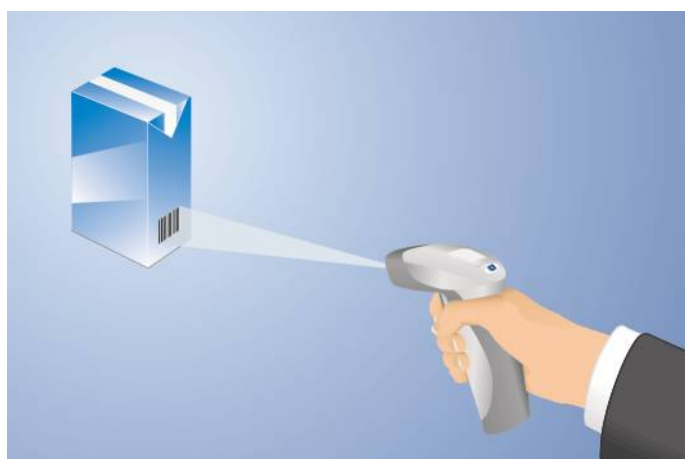

Technical Data

Optical Data

Read Range	5...328 mm
Resolution	1280 × 960 Pixel
Light Source	Red Light
Max. Ambient Light	97000 Lux
Barcode Printing Contrast	> 15 %

Electrical Data

Supply Voltage	5 V DC
Current Consumption (U _b = 5V)	< 350 mA
Temperature Range	-20...55 °C
Interface	RS-232
Baud Rate	< 115200 Bd
Acoustic signal	yes
Vibration signal	yes
Visual signal	yes

Mechanical Data

Housing Material	Plastic
Weight	110 g
Degree of Protection	IP54
Connection	Prewired
Cable Length	240 cm
Shock Resistance	> 50 *

RS-232 Interface


Suitable Mounting Technology No.

431

* Falls from a height of 1.8 m onto concrete

Complementary Products

Connection Line ZCLL001
Fieldbus Gateway ZAGxxxN01, EPGG001
Interface Cable ZDNN001
Interface Cable ZDNN002
Software

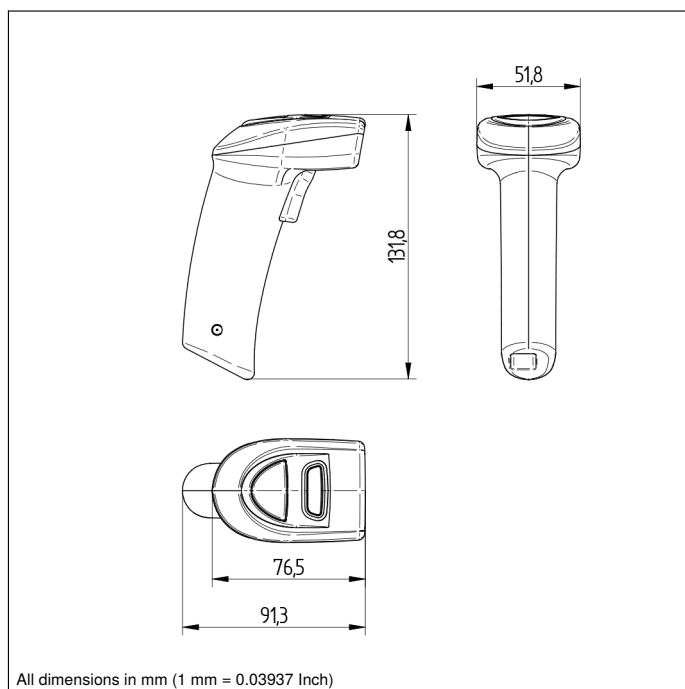

Min. Resolution		Read Range 1D	Read Range 2D
1D	2D		
0,076 mm	0,127 mm	85 to 107 mm	28 to 100 mm
0,19 mm	0,16 mm	18 to 167 mm	18 to 135 mm
0,267 mm	0,254 mm	5 to 205 mm	5 to 165 mm
0,33 mm	0,528 mm	13 to 265 mm	13 to 328 mm