XUSZAML2PTS

Safety light curtain muting arm L 2parallel multi-beams high speed conveyor





Main

Range of product	Telemecanique Safety light curtains XUSL
Product or component type	Multi-beam prebuilt muting arms
Device short name	XUSZAM
Output type	2 discrete solid-state PNP (NO)
[Sn] nominal sensing distance	03.5 m
Number of beams	5
Space between beams	10 mm

Complementary

Product compatibility	XUSL4M
Detection system	Through beam
Product specific application	Conveyor system exit direction Conveyor system high speed
Specific application of photoelectric detector	Detection of opaque parts
Sensing range	010 cm space between package > 32 cm space between package
Response time	< 100 ms
Kit composition	Transmitter + receiver quick start guide
Emission	IR LED 940 nm
[Us] rated supply voltage	24 V DC +/- 20 %
Supply	Via connector
Current consumption	42 mA
Output voltage	24 V
Output circuit type	DC
Maximum voltage drop	<0.5 V
Switching capacity in mA	100 mA
Local signalling	2 yellow LED receiver
Housing colour	Red RAL 3000

Environment

Directives	2011/65/EU - RoHS directive 1907/2006/EC - REACH directive 2002/96/EC - WEEE directive 98/37/EEC - machinery 89/336/EEC - electromagnetic compatibility	
Product certifications	CE	
Safety reliability data	PFHd = 2.73E-7 1/h	
Ambient air temperature for operation	-3055 °C	
Ambient air temperature for storage	-3070 °C	
Relative humidity	095 % without condensation	
IP degree of protection	IP65	
Shock resistance	10 gn for 16 ms conforming to IEC 61496-1	
Vibration resistance	0.35 +/- 0.05 mm (f= 1055 Hz) conforming to IEC 61496-1	

Packing Units

Unit Type of Package 1	PCE	
Number of Units in Package 1	1	
Package 1 Weight	2.76 kg	
Package 1 Height	14.5 cm	
Package 1 width	20 cm	
Package 1 Length	51 cm	


Offer Sustainability

Sustainable offer status	Green Premium product	
REACh Regulation	☑ REACh Declaration	
REACh free of SVHC	Yes	
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EPEU RoHS Declaration	
Toxic heavy metal free	Yes	
Mercury free	Yes	
RoHS exemption information	₫Yes	
Environmental Disclosure	Product Environmental Profile	
Circularity Profile	[™] End of Life Information	
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins	

Product data sheet Dimensions Drawings

XUSZAML2PTS

Dimensions

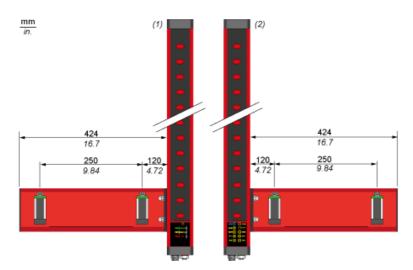

(1): Transmitter(2): Receiver