



# XUM2AKSBL2T

## PHOTOELECTRIC SENSOR MINIATURE THRU BEAM SN 15M EMITTER CABLE 2M

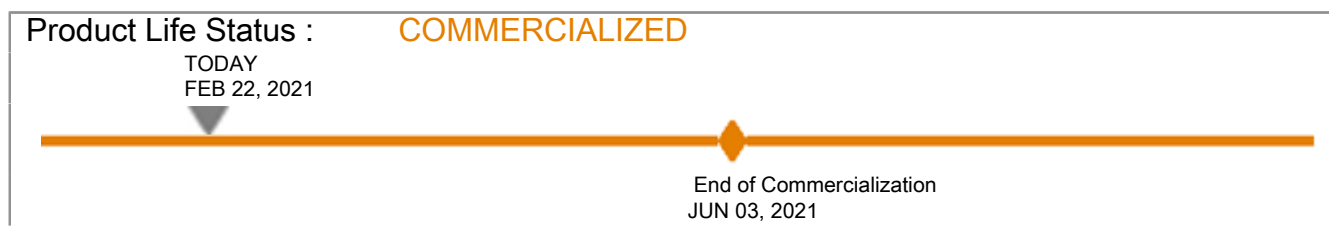

### Main

Range of product	OsiSense XU
Series name	General purpose single mode
Electronic sensor type	Photo-electric sensor transmitter
Sensor name	XUM
Sensor design	Miniature
Detection system	Thru beam
Material	Plastic
Supply circuit type	DC
Wiring technique	2-wire
Electrical connection	Cable
Cable length	2 m
Emission	Red thru beam
[Sn] nominal sensing distance	15 m need a receiver

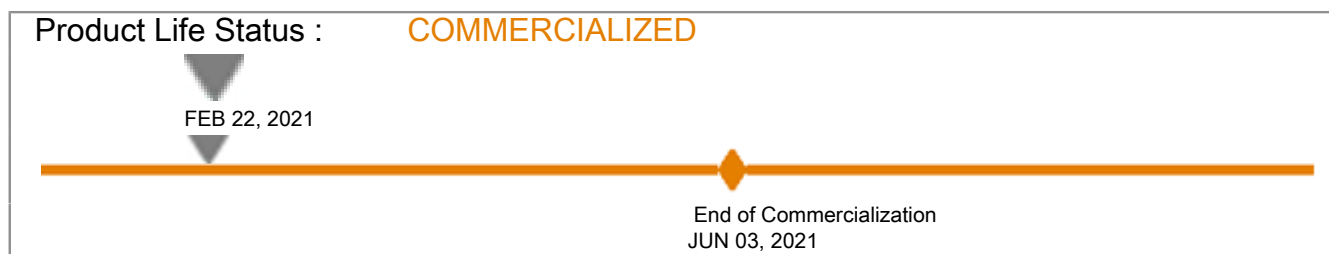

### Complementary

Enclosure material	PBT
Lens material	Modified polyarylate
Wire insulation material	PVC
Status LED	Supply on: 1 LED (orange)
[Us] rated supply voltage	12...24 V DC with reverse polarity protection
Supply voltage limits	10.2...26.4 V DC
Maximum voltage drop	<2 V
Current consumption	12 mA no-load
Maximum delay first up	100 ms
Depth	20 mm
Height	34 mm
Width	11 mm
Net weight	0.063 kg




## Environment

Product certifications	CE UL RCM
Ambient air temperature for operation	-30...55 °C
Ambient air temperature for storage	-40...70 °C
Vibration resistance	+/- 1.5 mm (f = 10...55 Hz) 2 hours in each direction X, Y and Z conforming to IEC 60068-2-6
Shock resistance	500 m/s <sup>2</sup> for X, Y, Z directions for 10 cycles (approx. 100 min) conforming to IEC 60068-2-27
IP degree of protection	IP67 conforming to IEC 60529

## Packing Units

Package 1 Weight	63.000 g
Package 1 Height	160.000 mm
Package 1 width	20.000 mm
Package 1 Length	110.000 mm


## Offer Sustainability

REACH Regulation	 <a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant  <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	 Yes


## Dimensions

### Transmitter. Pre-cable Version

#### Description



#### Dimensions

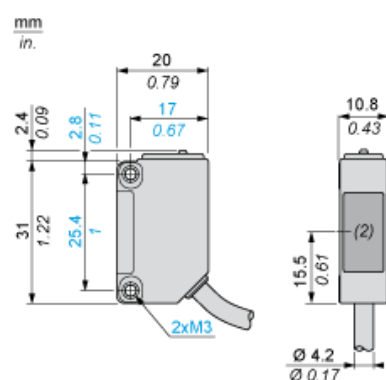


- (1) Power supply indicator (orange)
- (2) Transmission

---

## Connections and Schema

---

### DC Transmitter



BN : Brown  
BU : Blue

---

## Mounting and Clearance

---



### Tightening Torque



(1) Base mounting fixing bracket

## Performance Curves

### Thru-beam System

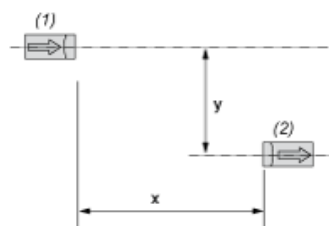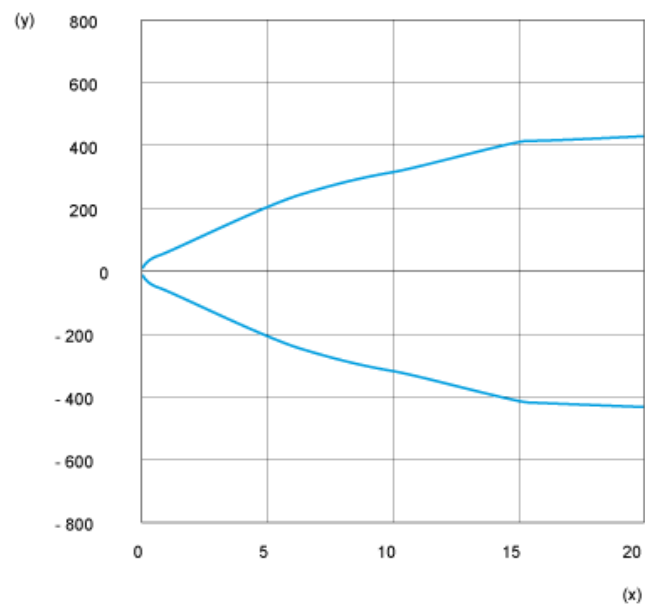

- (1) Transmitter
- (2) Receiver
- (y) Parallel movement in mm
- (x) Distance in m