



## Model Number

**OBR25M-R201-2EP-IO-L**

Laser retroreflective sensor  
with fixed cable

## Features

- Medium design with versatile mounting options
- DuraBeam Laser Sensors - durable and employable like an LED
- Extended temperature range -40°C ... 60°C
- High degree of protection IP69K
- IO-link interface for service and process data

## Product information


The optical sensors in the series are the first devices to offer an end-to-end solution in a medium-sized standard design—from the thru-beam sensor through to the measuring distance sensor. As a result of this design, the sensors are able to perform practically all standard automation tasks.

The entire series enables sensors to communicate via IO-Link.


The DuraBeam laser sensors are durable and can be used in the same way as a standard sensor.

Multi Pixel Technology (MPT) ensures that the standard sensors are flexible and can be adapted to the application environment.


## Dimensions

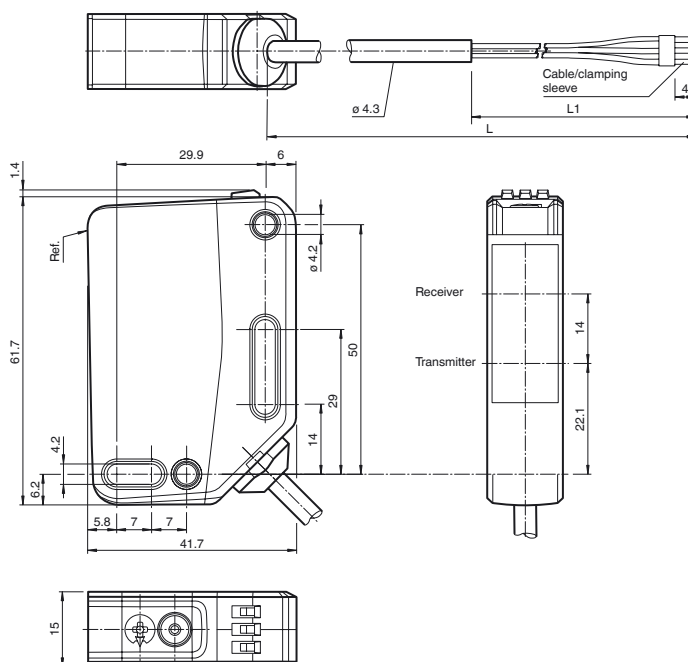

## Electrical connection



### Indicators/operating means

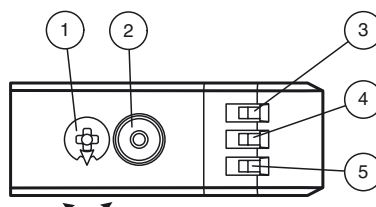

|   |                                      |    |
|---|--------------------------------------|----|
| 1 | Sensitivity adjustment               |    |
| 2 | Light-on / dark-on changeover switch |    |
| 3 | Operating indicator / dark on        | GN |
| 4 | Signal indicator                     | YE |
| 5 | Operating indicator / light on       | GN |

## Technical data

### General specifications

|                           |                             |
|---------------------------|-----------------------------|
| Effective detection range | 0 ... 25 m                  |
| Reflector distance        | 0.5 ... 25 m                |
| Threshold detection range | 33 m                        |
| Reference target          | H85-2 reflector             |
| Light source              | laser diode                 |
| Light type                | modulated visible red light |
| Polarization filter       | yes                         |

### Laser nominal ratings

|                            |   |
|----------------------------|---|
| Note                       | LASER LIGHT , DO NOT STARE INTO BEAM                  |
| Laser class                | 1   |
| Wave length                | 680 nm  |
| Beam divergence            | > 5 mrad d63 < 2 mm in the range of 250 mm ... 750 mm |
| Pulse length               | 1.6 µs  |
| Repetition rate            | max. 17.6 kHz   |
| max. pulse energy          | 9.6 nJ  |
| Diameter of the light spot | approx. 50 mm at a distance of 25 m                   |
| Angle of divergence        | approx. 0.1 °   |
| Ambient light limit        | EN 60947-5-2 : 60000 Lux                              |

### Functional safety related parameters

|                                |       |
|--------------------------------|-------|
| MTTF <sub>d</sub>              | 672 a |
| Mission Time (T <sub>M</sub> ) | 20 a  |
| Diagnostic Coverage (DC)       | 0 %   |

### Indicators/operating means

|                     |  |
|---------------------|--|
| Operation indicator | LED green:<br>constantly on - power on<br>flashing (4Hz) - short circuit<br>flashing with short break (1 Hz) - IO-Link mode                |
| Function indicator  | Yellow LED:<br>Permanently lit - light path clear<br>Permanently off - object detected<br>Flashing (4 Hz) - insufficient operating reserve |
| Control elements    | Light-on/dark-on changeover switch   |
| Control elements    | sensitivity adjustment   |

### Electrical specifications

|                        |                |                                   |
|------------------------|----------------|-----------------------------------|
| Operating voltage      | U <sub>B</sub> | 10 ... 30 V DC                    |
| Ripple                 |                | max. 10 %                         |
| No-load supply current | I <sub>0</sub> | < 15 mA at 24 V Operating voltage |
| Protection class       |                | III                               |

### Interface

|                             |   |
|-----------------------------|---|
| Interface type              | IO-Link ( via C/Q = BK )                              |
| Device profile              | Identification and diagnosis<br>Smart Sensor type 2.4 |
| Transfer rate               | COM 2 (38.4 kBaud)                                    |
| IO-Link Revision            | 1.1   |
| Min. cycle time             | 2.3 ms  |
| Process data width          | Process data input 2 Bit<br>Process data output 2 Bit |
| SIO mode support            | yes   |
| Device ID                   | 0x111212 (1118738)                                    |
| Compatible master port type | A   |

### Output

|                     |   |            |
|---------------------|---|------------|
| Switching type      | The switching type of the sensor is adjustable. The default setting is:<br>C/Q - BK: NPN normally open / dark-on, PNP normally closed / light-on, IO-Link<br>/Q - WH: NPN normally closed / light-on, PNP normally open / dark-on |            |
| Signal output       | 2 push-pull (4 in 1) outputs, short-circuit protected, reverse polarity protected, overvoltage protected  |            |
| Switching voltage   | max. 30 V DC  |            |
| Switching current   | max. 100 mA , resistive load  |            |
| Usage category      | DC-12 and DC-13   |            |
| Voltage drop        | U <sub>d</sub>  | ≤ 1.5 V DC |
| Switching frequency | f   | 2000 Hz    |
| Response time       |   | 250 μs     |

### Conformity


|                         |                 |
|-------------------------|-----------------|
| Communication interface | IEC 61131-9     |
| Product standard        | EN 60947-5-2    |
| Laser safety            | EN 60825-1:2014 |

### Ambient conditions

|                     |   |
|---------------------|---|
| Ambient temperature | -40 ... 60 °C (-40 ... 140 °F) , fixed cable<br>-20 ... 60 °C (-4 ... 140 °F) , movable cable not appropriate for conveyor chains |
| Storage temperature | -40 ... 70 °C (-40 ... 158 °F)  |

### Mechanical specifications

## Laserlabel

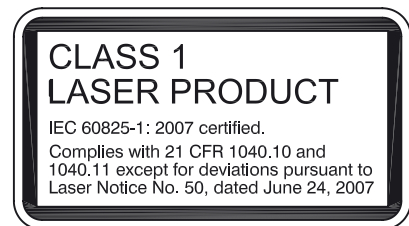

## Accessories

### IO-Link-Master02-USB

IO-Link master, supply via USB port or separate power supply, LED indicators, M12 plug for sensor connection

### OMH-RL31-02

Mounting bracket narrow

### OMH-RL31-03

Mounting bracket narrow

### OMH-RL31-04

Mounting aid for round steel ø 12 mm or sheet 1.5 mm ... 3 mm

### OMH-RL31-07

Mounting bracket including adjustment

### OMH-R20x-Quick-Mount

Quick mounting accessory

### REF-H85-2

Reflector, rectangular 84.5 mm x 84.5 mm, mounting holes

### REF-C110-2

Reflector, round ø 84 mm, central mounting hole

### REF-H50

Reflector, rectangular 51 mm x 61 mm, mounting holes, fixing strap

### REF-VR10

Reflector, rectangular 60 mm x 19 mm, mounting holes

### OFR-100/100

Reflective tape 100 mm x 100 mm

### REF-MH82

Reflector with Micro-structure, rectangular 82 mm x 60 mm, mounting holes

### REF-MH78


|                      |                     |
|----------------------|---------------------|
| Housing width        | 15 mm               |
| Housing height       | 61.7 mm             |
| Housing depth        | 41.7 mm             |
| Degree of protection | IP67 / IP69 / IP69K |
| Connection           | 2 m fixed cable     |
| Material             |                     |
| Housing              | PC (Polycarbonate)  |
| Optical face         | PMMA                |
| Mass                 | approx. 83 g        |
| Cable length         | 2 m                 |

#### Approvals and certificates


|              |  |
|--------------|--|
| UL approval  | E87056, cULus Listed, class 2 power supply, type rating 1  |
| CCC approval | CCC approval / marking not required for products rated ≤36 V   |
| FDA approval | IEC 60825-1:2007 Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007 |

## Curves/Diagrams

### Characteristic response curve

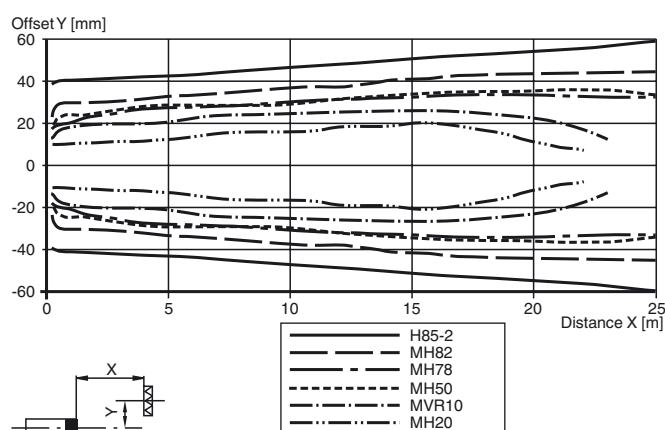

### Relative received light strength (typical)

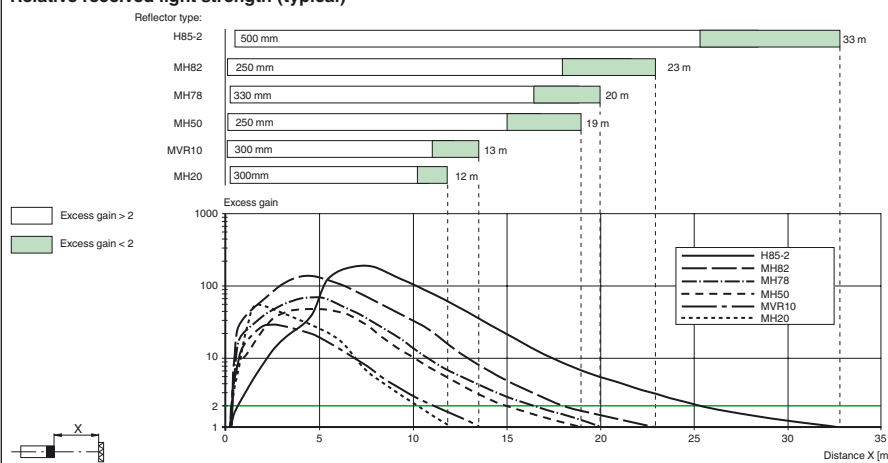

## Functions and Operation

To unlock the adjustment functions turn the sensing range /sensitivity adjuster for more than 180 degrees.

### Sensing Range / Sensitivity

Turn sensing range / sensitivity adjuster clockwise to increase sensing range / sensitivity.

Turn sensing range / sensitivity adjuster counter clockwise to decrease sensing range / sensitivity.

If the end of the adjustment range is reached, the signal indicator starts flashing with 8 Hz.

### Light-on / Dark-on Configuration

Press the light-on / dark-on changeover switch for more than 1 second (less than 4 seconds). The light-on / dark-on mode changes and the operating indicators are activated accordingly.

If you press the light-on / dark-on changeover switch for more than 4 seconds, the light-on /dark-on mode changes back to the original setting. On release of the light-on / dark-on changeover switch the current state is activated.



### Restore Factory Settings

Press the light-on / dark-on changeover switch for more than 10 seconds (less than 30 seconds) until all LEDs turn off. On release of the light-on / dark-on changeover switch the signal indicator turns on. After 5 seconds the sensor resumes operation with factory default settings.

After 5 minutes of inactivity the sensing range / sensitivity adjustment is locked. In order to reactivate the sensing range / sensitivity adjustment, turn the sensing range / sensitivity adjuster for more than 180 degrees.

