

# **Technical data sheet** Stationary bar code reader

Part no.: 50116205

BCL 300i SF 100



#### Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Diagrams
- Operation and display
- Part number code
- Notes
- Accessories













# **Technical data**



Series	BCL 300i
Functions	
Functions	Alignment mode
	AutoConfig
	AutoControl
	AutoReflAct
	Code fragment technology
	LED indicator
	Reference code comparison
Characteristic parameters	
MTTF	110 years
Read data	
Code types, readable	2/5 Interleaved
	Codabar
	Code 128
	Code 39
	Code 93
	EAN 8/13
	GS1 Databar Expanded
	GS1 Databar Limited
	GS1 Databar Omnidirectional
	UPC
Scanning rate, typical Bar codes per reading gate, max.	1,000 scans/s 64 Piece(s)
number Optical data	
·	70 445 222
Reading distance	70 445 mm Laser, Red
Light source Laser light wavelength	655 nm
Laser class	2, IEC/EN 60825-1:2007
Transmitted-signal shape	
	Continuous
Usable opening angle (reading field	Continuous 60 °
Usable opening angle (reading field opening)	
Usable opening angle (reading field opening) Modulus size	60 °
Usable opening angle (reading field opening) Modulus size Reading method	60 ° 0.3 0.5 mm
Usable opening angle (reading field opening) Modulus size Reading method Beam deflection	60 °  0.3 0.5 mm  Line scanner with deflecting mirror  By means of rotating polygon mirror
Usable opening angle (reading field opening) Modulus size Reading method Beam deflection Light beam exit	0.3 0.5 mm Line scanner with deflecting mirror By means of rotating polygon mirror wheel + deflecting mirror
Usable opening angle (reading field opening) Modulus size Reading method Beam deflection Light beam exit	0.3 0.5 mm Line scanner with deflecting mirror By means of rotating polygon mirror wheel + deflecting mirror
Usable opening angle (reading field opening)  Modulus size  Reading method  Beam deflection  Light beam exit  Electrical data  Protective circuit	60 °  0.3 0.5 mm  Line scanner with deflecting mirror  By means of rotating polygon mirror wheel + deflecting mirror  Lateral with deflecting mirror
Usable opening angle (reading field opening)  Modulus size  Reading method  Beam deflection  Light beam exit  Electrical data  Protective circuit  Performance data	60 °  0.3 0.5 mm  Line scanner with deflecting mirror  By means of rotating polygon mirror wheel + deflecting mirror  Lateral with deflecting mirror
Usable opening angle (reading field opening)  Modulus size  Reading method  Beam deflection  Light beam exit  Electrical data  Protective circuit	60 °  0.3 0.5 mm  Line scanner with deflecting mirror  By means of rotating polygon mirror wheel + deflecting mirror  Lateral with deflecting mirror
Usable opening angle (reading field opening)  Modulus size  Reading method  Beam deflection  Light beam exit  Electrical data  Protective circuit  Performance data  Supply voltage U <sub>B</sub>	60 °  0.3 0.5 mm  Line scanner with deflecting mirror  By means of rotating polygon mirror wheel + deflecting mirror  Lateral with deflecting mirror  Polarity reversal protection  18 30 V, DC
Usable opening angle (reading field opening)  Modulus size  Reading method  Beam deflection  Light beam exit  Electrical data  Protective circuit  Performance data Supply voltage U <sub>B</sub> Power consumption, max.	60 °  0.3 0.5 mm  Line scanner with deflecting mirror  By means of rotating polygon mirror wheel + deflecting mirror  Lateral with deflecting mirror  Polarity reversal protection  18 30 V, DC
Usable opening angle (reading field opening)  Modulus size  Reading method  Beam deflection  Light beam exit  Electrical data  Protective circuit  Performance data Supply voltage U <sub>B</sub> Power consumption, max.  Inputs/outputs selectable	60 °  0.3 0.5 mm  Line scanner with deflecting mirror By means of rotating polygon mirror wheel + deflecting mirror  Lateral with deflecting mirror  Polarity reversal protection  18 30 V, DC  4.5 W  60 mA
Usable opening angle (reading field opening)  Modulus size  Reading method  Beam deflection  Light beam exit  Electrical data  Protective circuit  Performance data Supply voltage U <sub>B</sub> Power consumption, max.  Inputs/outputs selectable Output current, max.	60 °  0.3 0.5 mm  Line scanner with deflecting mirror  By means of rotating polygon mirror wheel + deflecting mirror  Lateral with deflecting mirror  Polarity reversal protection  18 30 V, DC  4.5 W  60 mA
Usable opening angle (reading field opening)  Modulus size  Reading method  Beam deflection  Light beam exit  Electrical data  Protective circuit  Performance data Supply voltage U <sub>B</sub> Power consumption, max.  Inputs/outputs selectable Output current, max. Number of inputs/outputs selectable	0.3 0.5 mm Line scanner with deflecting mirror By means of rotating polygon mirror wheel + deflecting mirror Lateral with deflecting mirror  Polarity reversal protection  18 30 V, DC 4.5 W  60 mA 2 Piece(s)
Usable opening angle (reading field opening)  Modulus size  Reading method  Beam deflection  Light beam exit  Electrical data  Protective circuit  Performance data Supply voltage U <sub>B</sub> Power consumption, max.  Inputs/outputs selectable Output current, max.  Number of inputs/outputs selectable Input current, max.	60 °  0.3 0.5 mm  Line scanner with deflecting mirror  By means of rotating polygon mirror wheel + deflecting mirror  Lateral with deflecting mirror  Polarity reversal protection  18 30 V, DC  4.5 W  60 mA 2 Piece(s)

Function Process  Transmission speed 4,800 115,200 Bd  Data format Adjustable  Start bit 1 Data bit 7,8 Stop bit 1, 2 stop bits  Parity Adjustable  Transmission protocol STX> <data><cr><lf> Data encoding ASCII  RS 422 Function Process  Transmission speed 4,800 115,200 Bd  Data format Adjustable  Start bit 1 Data bit 7, 8 data bits  Stop bit 1, 2 stop bits  Transmission protocol Adjustable  Start bit 1 Data bit 7, 8 data bits  Stop bit 1, 2 stop bits  Transmission protocol Adjustable  Data encoding ASCII  Service interface  Type USB  USB Function Configuration via software  Connection  Number of connections 1 Piece(s)  Connection to device Data interface PWR / SW IN/OUT Service interface  Type of connection Plug connector</lf></cr></data>
Transmission speed 4,800 115,200 Bd  Data format Adjustable  Start bit 1  Data bit 7,8  Stop bit 1, 2 stop bits  Parity Adjustable  Transmission protocol STX> <data><cr><lf> Data encoding ASCII  RS 422  Function Process  Transmission speed 4,800 115,200 Bd  Data format Adjustable  Start bit 1  Data bit 7, 8 data bits  Stop bit 1, 2 stop bits  Transmission protocol Adjustable  Start bit 2, 8 data bits  Stop bit 1, 2 stop bits  Transmission protocol Adjustable  Data encoding ASCII  Service interface  Type USB  USB  Function Configuration via software  Connection  Number of connections 1 Piece(s)  Connection 1  Function BUS OUT  Connection to device  Data interface  PWR / SW IN/OUT  Service interface</lf></cr></data>
Data format Start bit Data bit Stop bit Adjustable Transmission protocol Data encoding  RS 422 Function Process Transmission speed Data format Adjustable Start bit Data bit T, 8 data bits Stop bit T, 2 stop bits Process Transmission speed Adjustable Start bit Data bit T, 8 data bits Stop bit T, 2 stop bits Transmission protocol Data encoding ASCII  Service interface  Type USB  USB Function Connection Number of connections  1 Piece(s)  Connection 1 Function BUS OUT Connection to device Data interface PWR / SW IN/OUT Service interface
Start bit 1 Data bit 7,8 Stop bit 1,2 stop bits Parity Adjustable Transmission protocol <stx><data><cr><lf> Data encoding ASCII  RS 422 Function Process Transmission speed 4,800 115,200 Bd Data format Adjustable Start bit 1 Data bit 7,8 data bits Stop bit 1,2 stop bits Transmission protocol Adjustable Data encoding ASCII  Service interface  Type USB  USB Function Configuration via software  Connection  Number of connections 1 Piece(s)  Connection 1 Function BUS OUT Connection to device Data interface PWR / SW IN/OUT Service interface</lf></cr></data></stx>
Data bit 7,8 Stop bit 1, 2 stop bits Parity Adjustable Transmission protocol STX> <data><cr><lf> Data encoding ASCII  RS 422 Function Process Transmission speed 4,800 115,200 Bd Data format Adjustable Start bit 1 Data bit 7, 8 data bits Stop bit 1, 2 stop bits Transmission protocol Adjustable Data encoding ASCII  Service interface  Type USB  USB Function Connections 1 Piece(s)  Connection 1  Function BUS OUT Connection to device Data interface PWR / SW IN/OUT Service interface</lf></cr></data>
Stop bit Parity Adjustable Transmission protocol Data encoding ASCII  RS 422 Function Process Transmission speed A,800 115,200 Bd Data format Adjustable Start bit 1 Data bit 7, 8 data bits Stop bit 1, 2 stop bits Transmission protocol Adjustable Data encoding ASCII  Service interface  Type USB Function Connection  Connection  BUSOUT Connection to device Data interface PWR / SW IN/OUT Service interface
Parity Adjustable Transmission protocol
Transmission protocol
RS 422 Function Process Transmission speed 4,800 115,200 Bd Data format Adjustable Start bit 1 Data bit 7, 8 data bits Stop bit 1, 2 stop bits Transmission protocol Adjustable Data encoding ASCII  Service interface  Type USB  USB Function Configuration via software  Connection Number of connections 1 Piece(s)  Connection 1 Function BUS OUT Connection to device Data interface PWR / SW IN/OUT Service interface
RS 422 Function Process Transmission speed 4,800 115,200 Bd  Data format Adjustable Start bit 1 Data bit 7, 8 data bits Stop bit 1, 2 stop bits Transmission protocol Adjustable Data encoding ASCII  Service interface  Type USB  USB Function Configuration via software  Connection  Number of connections 1 Piece(s)  Connection 1 Function BUS OUT Connection to device Data interface PWR / SW IN/OUT Service interface
Function Process Transmission speed 4,800 115,200 Bd  Data format Adjustable Start bit 1 Data bit 7, 8 data bits Stop bit 1, 2 stop bits Transmission protocol Adjustable Data encoding ASCII  Service interface  Type USB  USB Function Configuration via software  Connection  Number of connections 1 Piece(s)  Connection 1 Function BUS OUT Connection to device Data interface PWR / SW IN/OUT Service interface
Function Process Transmission speed 4,800 115,200 Bd  Data format Adjustable Start bit 1 Data bit 7, 8 data bits Stop bit 1, 2 stop bits Transmission protocol Adjustable Data encoding ASCII  Service interface  Type USB  USB Function Configuration via software  Connection  Number of connections 1 Piece(s)  Connection 1 Function BUS OUT Connection to device Data interface PWR / SW IN/OUT Service interface
Transmission speed 4,800 115,200 Bd  Data format Adjustable  Start bit 1  Data bit 7, 8 data bits  Stop bit 1, 2 stop bits  Transmission protocol Adjustable  Data encoding ASCII  Service interface  Type USB  USB  Function Configuration via software  Connection  Number of connections 1 Piece(s)  Connection 1  Function BUS OUT  Connection to device  Data interface  PWR / SW IN/OUT  Service interface
Data format Start bit 1 Data bit 7, 8 data bits Stop bit 1, 2 stop bits Transmission protocol Adjustable Data encoding ASCII  Service interface Type USB Function Connection  Number of connections 1 Piece(s)  Connection 1 Function BUS OUT Connection to device Data interface PWR / SW IN/OUT Service interface
Start bit 1 Data bit 7, 8 data bits Stop bit 1, 2 stop bits Transmission protocol Adjustable Data encoding ASCII  Service interface Type USB  USB Function Configuration via software  Connection  Number of connections 1 Piece(s)  Connection 1 Function BUS OUT Connection to device Data interface PWR / SW IN/OUT Service interface
Data bit 7, 8 data bits Stop bit 1, 2 stop bits Transmission protocol Adjustable Data encoding ASCII  Service interface  Type USB  USB Function Configuration via software  Connection  Number of connections 1 Piece(s)  Connection 1  Function BUS OUT Connection to device Data interface PWR / SW IN/OUT Service interface
Stop bit  Transmission protocol Data encoding  Service interface  Type  USB  Function  Connection  Number of connections  1 Piece(s)  Connection 1  Function  BUS OUT  Connection to device Data interface  PWR / SW IN/OUT  Service interface
Transmission protocol Adjustable Data encoding ASCII  Service interface  Type USB  Function Configuration via software  Connection  Number of connections 1 Piece(s)  Connection 1  Function BUS OUT  Connection to device Data interface  PWR / SW IN/OUT Service interface
Data encoding  ASCII  Service interface  Type  USB  Function  Configuration via software  Connection  Number of connections  1 Piece(s)  Connection 1  Function  BUS OUT  Connection to device  Data interface  PWR / SW IN/OUT  Service interface
Service interface  Type USB  USB  Function Configuration via software  Connection  Number of connections 1 Piece(s)  Connection 1  Function BUS OUT  Connection to device  Data interface  PWR / SW IN/OUT  Service interface
Type USB  USB  Function Configuration via software  Connection  Number of connections 1 Piece(s)  Connection 1  Function BUS OUT  Connection to device  Data interface  PWR / SW IN/OUT  Service interface
Type USB  USB  Function Configuration via software  Connection  Number of connections 1 Piece(s)  Connection 1  Function BUS OUT  Connection to device  Data interface  PWR / SW IN/OUT  Service interface
USB Function Configuration via software  Connection  Unumber of connections 1 Piece(s)  Connection 1  Function BUS OUT  Connection to device  Data interface  PWR / SW IN/OUT  Service interface
USB Function Configuration via software  Connection  Unumber of connections 1 Piece(s)  Connection 1  Function BUS OUT  Connection to device  Data interface  PWR / SW IN/OUT  Service interface
Function Configuration via software  Connection  1 Piece(s)  Connection 1  Function  BUS OUT  Connection to device  Data interface  PWR / SW IN/OUT  Service interface
Connection  Number of connections  1 Piece(s)  Connection 1  Function  BUS OUT  Connection to device  Data interface  PWR / SW IN/OUT  Service interface
Connection 1 Function  BUS OUT Connection to device Data interface PWR / SW IN/OUT Service interface
Connection 1 Function  BUS OUT Connection to device Data interface PWR / SW IN/OUT Service interface
Connection 1  Function  BUS OUT  Connection to device  Data interface  PWR / SW IN/OUT  Service interface
Function  BUS OUT  Connection to device  Data interface  PWR / SW IN/OUT  Service interface
Function  BUS OUT  Connection to device  Data interface  PWR / SW IN/OUT  Service interface
Connection to device Data interface PWR / SW IN/OUT Service interface
Data interface PWR / SW IN/OUT Service interface
PWR / SW IN/OUT Service interface
Service interface
Type of connection Plug connector
No. of pins 32 -pin
Type Male
Mechanical data
Design Cubic
Dimension (W x H x L) 103 mm x 44 mm x 96 mm
Housing material Metal, Diecast aluminum
Lens cover material Glass
Net weight 350 g
Housing color Black
Red
lybe of fastening Doversii drooves
Fastening on back
Fastening on back Via optional mounting device
Fastening on back Via optional mounting device  Description and display
Fastening on back Via optional mounting device  Departion and display  Type of display  LED
Fastening on back Via optional mounting device  Departion and display  Type of display  LED  Number of LEDs  2 Piece(s)
Fastening on back Via optional mounting device  Departion and display  Type of display  LED

### **Technical data**

# Leuze

#### **Environmental data**

Ambient temperature, operation	0 40 °C
Ambient temperature, storage	-20 70 °C
Relative humidity (non-condensing)	0 90 %

#### Certifications


Degree of protection	IP 65
Protection class	III
Certifications	c UL US
Test procedure for EMC in accordance	EN 55022
with standard	EN 61000-4-2, -3, -4, -6
Test procedure for shock in accordance with standard	IEC 60068-2-27, test Ea
Test procedure for continuous shock in accordance with standard	IEC 60068-2-29, test Eb
Test procedure for vibration in accordance with standard	IEC 60068-2-6, test Fc

#### Classification

Customs tariff number	84719000
eCl@ss 8.0	27280102
eCl@ss 9.0	27280102
ETIM 5.0	EC002550
ETIM 6.0	EC002550

# **Dimensioned drawings**

All dimensions in millimeters

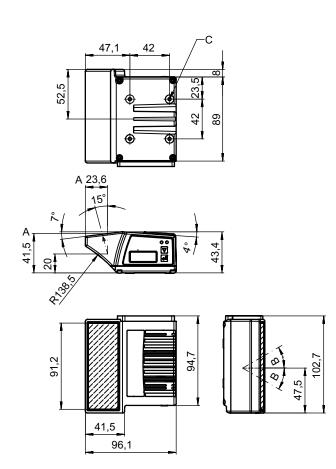

- Optical axis
- Deflection angle of the laser beam: ± 30°
- M4 thread (5 deep)

### **Electrical connection**




#### **Connection 1**

Function	BUS OUT
	Connection to device
	Data interface
	PWR / SW IN/OUT
	Service interface
Type of connection	Plug connector
No. of pins	32 -pin
Туре	Male

# **Diagrams**

### Reading field curve

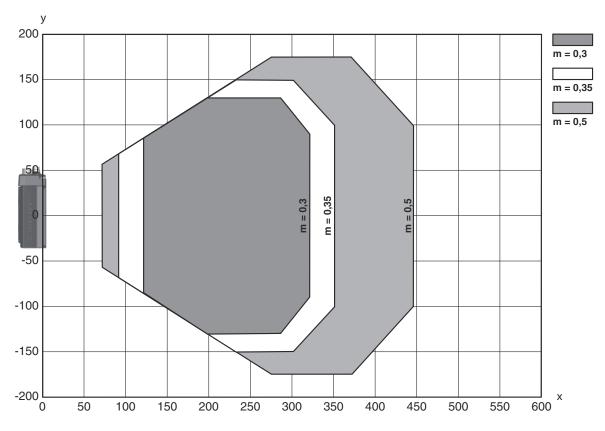

- x Reading field distance [mm]
- y Reading field width [mm]

# **Operation and display**

LED	Display	Meaning
1 PWR	Green, flashing	Device ok, initialization phase
	Green, continuous light	Device OK
	Green, briefly off - on	Reading successful
	green, briefly off - briefly red - on	Reading not successful
	Orange, continuous light	Service mode
	Red, flashing	Device OK, warning set
	Red, continuous light	Error, device error
2 BUS	Green, flashing	Initialization

# Operation and display



LED	Display	Meaning
2 BUS	Green, continuous light	Bus operation ok
	Red, flashing	Communication error
	Red, continuous light	Bus error

### Part number code

Part designation: BCL XXXX YYZ AAA BB CCCC

BCL	Operating principle BCL: bar code reader
XXXX	Series/interface (integrated fieldbus technology) 300i: RS 232 / RS 422 (stand-alone) 301i: RS 485 (multiNet slave) 304i: PROFIBUS DP 308i: EtherNet TCP/IP, UDP 348i: PROFINET RT 358i: EtherNet/IP
YY	Scanning principle S: line scanner (single line) R1: line scanner (raster) O: oscillating-mirror scanner (oscillating mirror)
Z	Optics N: High Density (close) M: Medium Density (medium distance) F: Low Density (remote) L: Long Range (very large distances) J: ink-jet (depending on the application)
AAA	Beam exit 100: lateral 102: front
ВВ	Special equipment D: with display H: with heating DH: optionally with display and heating P: plastic exit window
cccc	Functions F007: optimized process data structure

#### Note



🖔 A list with all available device types can be found on the Leuze website at www.leuze.com.

### **Notes**



#### Observe intended use!



- \$ Only use the product in accordance with its intended use.

#### **Notes**



## $\Lambda$

#### WARNING! LASER RADIATION - CLASS 2 LASER PRODUCT



Do not stare into beam!

The device satisfies the requirements of IEC 60825-1:2007 (EN 60825-1:2007) safety regulations for a product of laser class 2 as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to "Laser Notice No. 50" from June 24, 2007.

- Never look directly into the laser beam or in the direction of reflected laser beams! If you look into the beam path over a longer time period, there is a risk of injury to the retina.
- ♥ Do not point the laser beam of the device at persons!
- 🖖 Interrupt the laser beam using a non-transparent, non-reflective object if the laser beam is accidentally directed towards a person.
- 🔖 When mounting and aligning the device, avoid reflections of the laser beam off reflective surfaces!
- 🔖 CAUTION! Use of controls or adjustments or performance of procedures other than specified herein may result in hazardous light exposure.
- b Observe the applicable statutory and local laser protection regulations.
- The device must not be tampered with and must not be changed in any way. There are no user-serviceable parts inside the device. Repairs must only be performed by Leuze electronic GmbH + Co. KG.

#### **NOTE**



Affix laser information and warning signs!

Laser information and warning signs are affixed to the device. In addition, self-adhesive laser information and warning signs (stick-on labels) are supplied in several languages.

- ♦ Affix the laser information sheet to the device in the language appropriate for the place of use. When using the device in the US, use the stick-on label with the "Complies with 21 CFR 1040.10" note.
- Affix the laser information and warning signs near the device if no signs are attached to the device (e.g. because the device is too small) or if the attached laser information and warning signs are concealed due to the installation position.
- Affix the laser information and warning signs so that they are legible without exposing the reader to the laser radiation of the device or other optical radiation.

### **Accessories**

# Connection technology - Connection cables

Part no.	Designation	Article	Description
50132079	KD U-M12-5A-V1- 050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Open end Shielded: No Cable length: 5,000 mm Sheathing material: PVC

# Connection technology - Interconnection cables

		0,		
	Part no.	Designation	Article	Description
7	50114571 *	KB 301-3000	Interconnection cable	Suitable for interface: RS 232, RS 422, RS 485 Connection 1: Socket connector Connection 2: JST ZHR, 10 -pin, 6 -pin Shielded: Yes Cable length: 3,000 mm Sheathing material: PVC

Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com

In der Braike 1, 73277 Owen Phone: +49 7021 573-0 • Fax: +49 7021 573-199

### **Accessories**



	Part no.	Designation	Article	Description
₩ •-•	50117011	KB USB A - USB miniB	Service line	Suitable for interface: USB Connection 1: USB Connection 2: USB Shielded: Yes Cable length: 1,500 mm Sheathing material: PVC

<sup>\*</sup> Necessary accessories, please order separately

# Mounting technology - Mounting brackets

Part no.	Designation	Article	Description
50121433	BT 300 W	Mounting device	Design of mounting device: Angle, L-shape Fastening, at system: Through-hole mounting Mounting bracket, at device: Screw type Type of mounting device: Adjustable Material: Metal

# Mounting technology - Rod mounts

Part no.	Designation	Article	Description
50121435	BT 56 - 1	Mounting device	Functions: Static applications Design of mounting device: Mounting system Fastening, at system: For 12 mm rod, For 14 mm rod, For 16 mm rod Mounting bracket, at device: Clampable Material: Metal Tightening torque of the clamping jaws: 8 N·m

# Mounting technology - Other

Part no.	Designation	Article	Description
50124941	BTU 0300M-W	Mounting device	Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable, Groove mounting, Suited for M4 screws Material: Metal

# Reflective tapes for standard applications

Part no.	Designation	Article	Description
50106119	REF 4-A-100x100	Reflective tape	Design: Rectangular Reflective surface: 100 mm x 100 mm Material: Plastic Chemical designation of the material: PMMA Fastening: Self-adhesive

### **Accessories**



# Services

	Part no.	Designation	Article	Description
<u>В</u>	S981020	CS30-E-212	Hourly rate for "Configuration"	Details: Compilation of the application data, selection and suggestion of suitable sensor system, drawing prepared as assembly sketch.  Conditions: Completed questionnaire or project specifications with a description of the application have been provided.  Restrictions: Travel and accommodation charged separately and according to expenditure.
	S981014	CS30-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours.  Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses.  Restrictions: No mechanical (mounting) and electrical (wiring) work performed, no changes (attachments, wiring, programming) to third-party components in the nearby environment.
	S981019	CS30-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses.  Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure.
<del>       </del>	S981021	CS30-V-212	Hourly rate for "Bar code qualification"	Details: REA evaluation with creation of a test report, evaluation of the code quality.  Conditions: Original bar codes to be provided by the client.

#### Note



🔖 A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.