


# P1EL100 LASER

Part Number

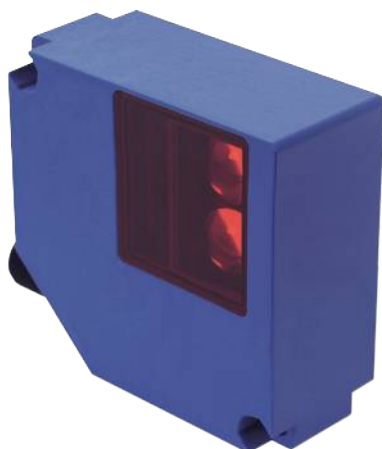

- Compensation of uneven conveyor belt areas with dynamic teach-in
- Dynamic readjustment of the switching threshold
- Flexible mounting options thanks to 180° rotatable plug
- Precise front edge detection with non-uniform objects

The Retro-Reflex Sensor with Light Band scans a significantly larger range than a retro-reflex sensor with a dot-shaped light spot. This makes it ideally suitable for reliably detecting the front edges of objects with irregular shapes or variable sizes. The sensor's collimated laser light band is absolutely homogeneous and can thus be precisely aligned to the conveyor belt's level. The sensor detects objects as small as just four millimeters. The compact format can be integrated into the smallest of spaces, for example in the side panels of conveyor systems.




## Technical Data


Optical Data	
Range	2500 mm
Reference Reflector/Reflector Foil	Z90R007
Smallest Recognizable Part	see Table 1
Light Source	Laser (red)
Wavelength	650 nm
Service Life (T = +25 °C)	100000 h
Laser Class (EN 60825-1)	1
Max. Ambient Light	10000 Lux
Light Strip Height	27 mm
Electrical Data	
Supply Voltage	12...30 V DC
Current Consumption (U <sub>b</sub> = 24 V)	< 30 mA
Switching Frequency	275 Hz
Response Time	1,8 ms
Temperature Range	-30...60 °C
Switching Output Voltage Drop	< 2,5 V
PNP Switching Output/Switching Current	100 mA
Residual Current Switching Output	< 50 µA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III
Mechanical Data	
Setting Method	Teach-In
Housing Material	Plastic
Degree of Protection	IP67/IP68
Connection	M12 × 1; 4-pin
Optic Cover	PMMA
Safety-relevant Data	
MTTFd (EN ISO 13849-1)	1942,78 a
PNP NO	●
Connection Diagram No.	150
Control Panel No.	1E1
Suitable Connection Equipment No.	2
Suitable Mounting Technology No.	110

## Complementary Products


PNP-NPN Converter BG2V1P-N-2M

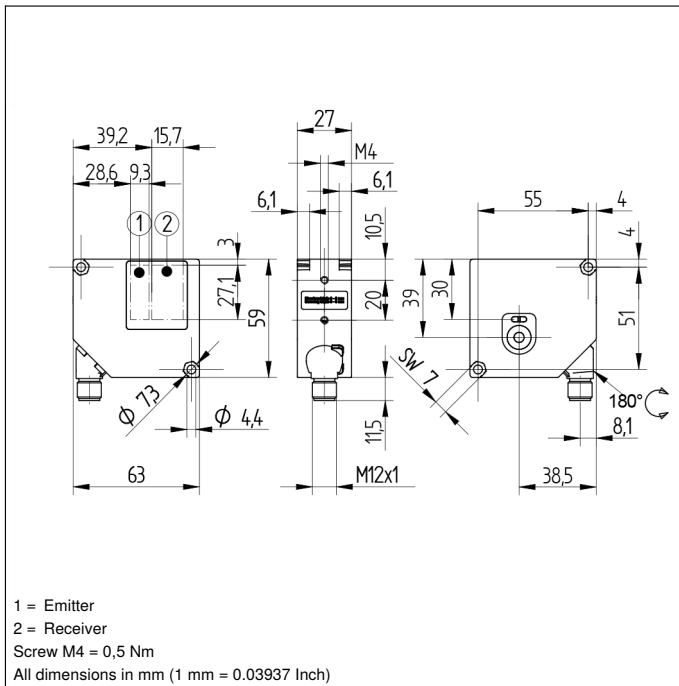

## Ctrl. Panel



06 = Teach Button  
30 = Switching Status/Contamination Warning  
68 = Supply Voltage Indicator

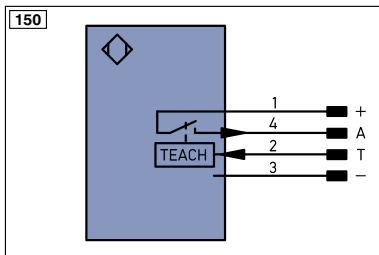

## Legend

+	Supply Voltage +	PT	Platinum measuring resistor	ENAR5422	Encoder A/Ä (TTL)
-	Supply Voltage 0 V	nc	not connected	ENB5422	Encoder B/B̄ (TTL)
~	Supply Voltage (AC Voltage)	U	Test Input	ENa	Encoder A
A	Switching Output (NO)	Ū	Test Input inverted	ENb	Encoder B
Ä	Switching Output (NC)	W	Trigger Input	AMIN	Digital output MIN
V	Contamination/Error Output (NO)	W-	Ground for the Trigger Input	AMAX	Digital output MAX
Ū	Contamination/Error Output (NC)	O	Analog Output	AOK	Digital output OK
E	Input (analog or digital)	O-	Ground for the Analog Output	SY in	Synchronization In
T	Teach Input	BZ	Block Discharge	SY OUT	Synchronization OUT
Z	Time Delay (activation)	AMV	Valve Output	OLT	Brightness output
S	Shielding	a	Valve Control Output +	M	Maintenance
RxD	Interface Receive Path	b	Valve Control Output 0 V	rsv	reserved
TxD	Interface Send Path	SY	Synchronization	Wire Colors according to IEC 60757	
RDY	Ready	SY-	Ground for the Synchronization	BK	Black
GND	Ground	E+	Receiver-Line	BN	Brown
CL	Clock	S+	Emitter-Line	RD	Red
E/A	Output/Input programmable	±	Grounding	OG	Orange
IO-Link	IO-Link	SrR	Switching Distance Reduction	YE	Yellow
PoE	Power over Ethernet	Rx+/-	Ethernet Receive Path	GN	Green
IN	Safety Input	Tx+/-	Ethernet Send Path	BU	Blue
OSSD	Safety Output	Bus	Interfaces-Bus A(+)/B(-)	VT	Violet
Signal	Signal Output	La	Emitted Light disengageable	GY	Grey
BLD+/-	Ethernet Gigabit bidirect. data line (A-D)	Mag	Magnet activation	WH	White
EN05422	Encoder 0-pulse 0-0 (TTL)	RES	Input confirmation	PK	Pink
		EDM	Contactur Monitoring	GNYE	Green/Yellow

**Table 1**

Distance, Sensor to Reflector	0,35 ... 1,60 m	1,60 ... 2,50 m
Smallest Recognizable Part	4 mm	10 mm

## Feasible reflector distance

Reflector type, mounting distance

Z90R004	0,4...1,6 m	Z90R009	0,35...2,5 m
Z90R005	0,4...1,6 m	ZRDF03K01	0,4...1,6 m
Z90R007	0,35...2,5 m	ZRDF10K01	0,4...1,6 m
Z90R008	0,35...2,5 m		

