




Safety light grid with integrated control unit

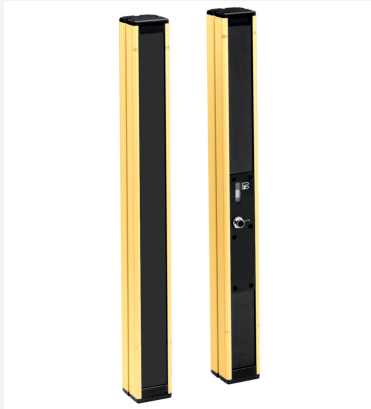


SLPC10-2

- Sensing range up to 10 m
- 2-radial design
- Beam spacing 500 mm
- Self-monitoring (type 4 according to IEC/EN 61496-1)
- Red transmission light
- Usable with or without start/restart disable
- Integrated relay monitor
- 7-segment diagnostic display
- Integrated function display
- Pre-fault indication
- OSSD outputs as semiconductor or relay outputs



Dimensions

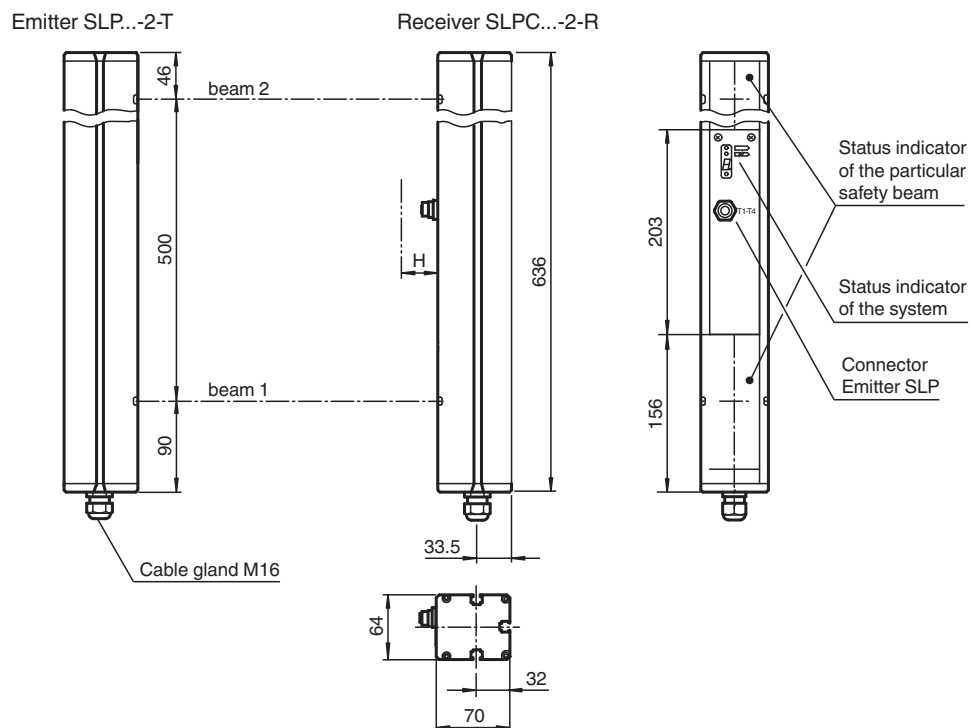

Technical Data

System components

Emitter	SLP10-2-T
Receiver	SLPC10-2-R

General specifications

Effective detection range	0.2 ... 10 m
Light source	LED
Light type	modulated visible red light

Release date: 2020-04-27 Date of issue: 2020-04-27 Filename: 111842_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Tests	IEC/EN 61496	
Safety type according to IEC/EN 61496		4
Marking	CE	
Target size		static: 32 mm dynamic: 50 mm (at v = 1.6 m/s of the obstacle)
Beam spacing	500 mm	
Number of beams		2
Operating mode	Start/restart disable, relay monitor,	
Angle of divergence		< 5 °
Functional safety related parameters		
Performance level (PL)		PL e
Category	Cat. 4	
Mission Time (T _M)		20 a
PFH _d	3.54 E-9	
Type		4
Indicators/operating means		
Diagnostics indicator		7-segment display
Function indicator	LED red: per receiver channel off: interruption flashes: receiver continuously on: reception with sufficient stability control on the front plate: LED red: OSSD off LED green: OSSD on	
Pre-fault indicator		LED red next to receiver flashes
Control elements	10 DIP switch in receiver terminal compartment	
Electrical specifications		
Operating voltage	U _B	24 V DC -15% / +25% , galvanically isolated
No-load supply current	I ₀	max. 250 mA
Protection class	III , IEC 61140	
Input		
Activation current	approx. 10 mA	
Activation time		0.03 ... 1 s
Test input	Reset-input for system test	
Function input		Relay monitor, start release
Output		
Pre-fault indication output		1 PNP, +U _B -2 V, max. 300 mA
Safety output	2 separated fail safe semiconductor outputs	
Signal output		1 PNP each, max. 300 mA for start readiness, OSSD on, OSSD off
Switching voltage	Operating voltage -2 V	
Switching current		max. 0.5 A
Response time	20 ms	
Conformity		
Functional safety	ISO 13849-1	
Product standard		EN 61496-1 ; IEC 61496-2
Approvals and certificates		
CE conformity		CE
Approvals	TÜV SÜD	
Ambient conditions		
Ambient temperature	0 ... 50 °C (32 ... 122 °F)	
Storage temperature		-20 ... 70 °C (-4 ... 158 °F)
Relative humidity	max. 95 %, not condensing	
Mechanical specifications		
Degree of protection	IP65	
Connection		M16 cable gland , terminal compartment with cage-terminals, M12-connector for emitter


Release date: 2020-04-27 Date of issue: 2020-04-27 Filename: 111842_eng.pdf

Technical Data

Connection options	Further electrical connection options on request: Connector DIN 43 651 Hirschmann, emitter: 6-pin+PE, receiver: 11-pin+PE	
Material		
Housing	extruded aluminum profile, RAL 1021 (yellow) coated	
Optical face		Plastic pane
Mass	Per 2300 g	


Connection

Emitter SLP




- T1 - Emitter channel 1
- T2 - Emitter channel 2
- ⏏ - 0 V



Receiver SLPC



Receiver SLPC (semiconductor outputs)		Receiver SLPC/31 (Relay outputs)	
		1 - Functional earth	
		2 - 0 V	
		3 - 24 V	
4 - n.c.		4	
5 - -		5	
6 - +		6	
7 - OSSD 1		7	
8 - OSSD 2		8	
		9 - Input, Relay monitor	
		10 - Input, Start release	
		11 - Input, Reset	
		12 - PNP-output, Soiled optics	
		13 - n.c.	
		14 - PNP-output, Startup readiness	
		15 - PNP-output, Indicator OSSD OFF	
		16 - PNP-output, Indicator OSSD ON	

Characteristic Curve

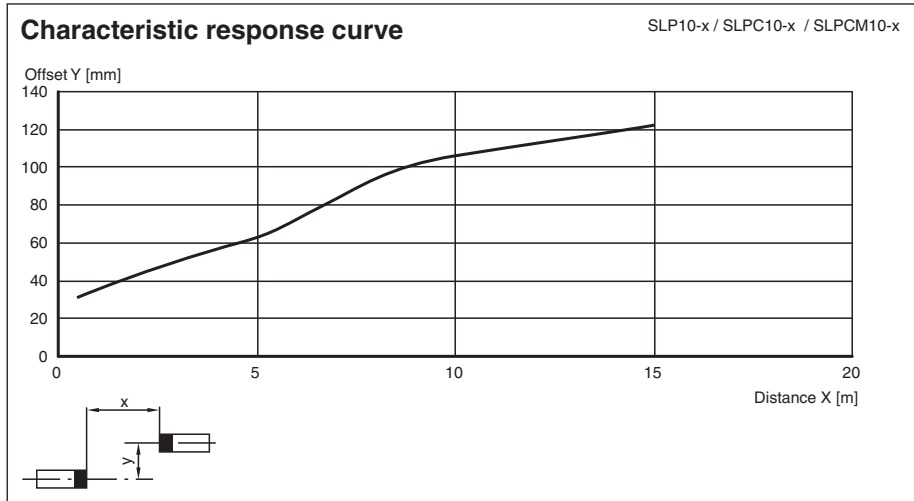

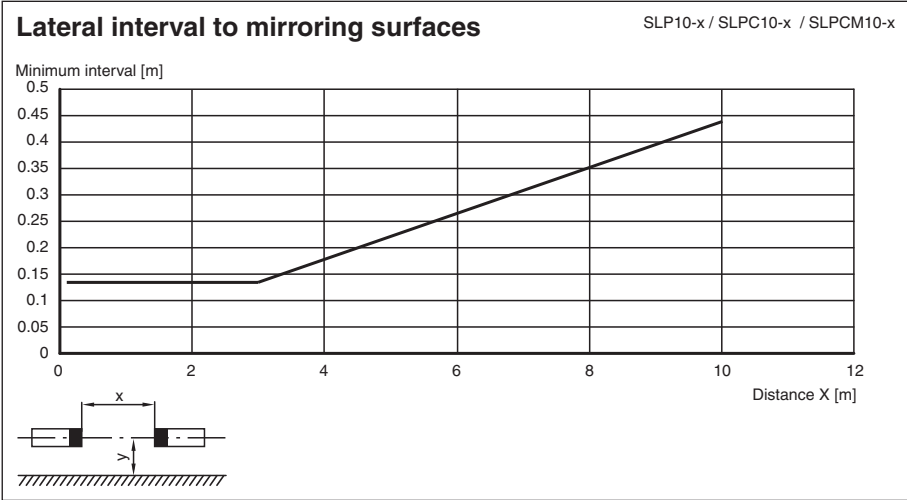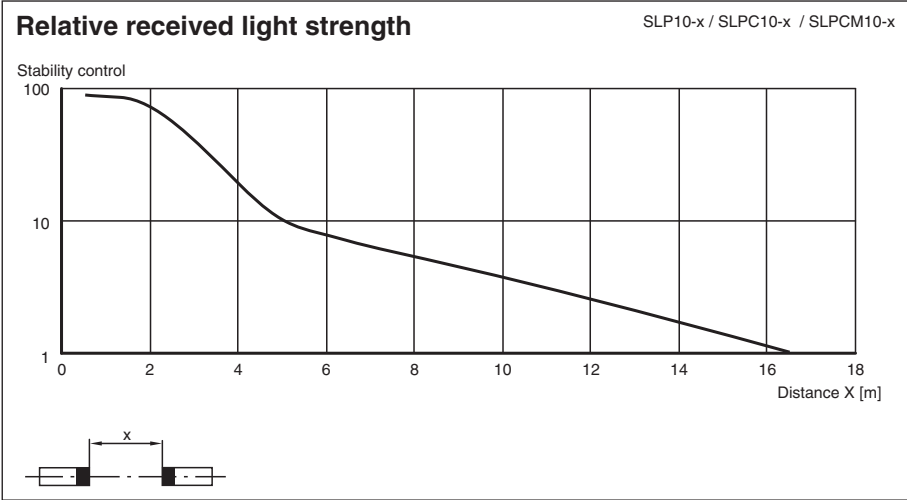


Accessories

	PG SLP-2	Protective glass panes for SLP series
---	-----------------	---------------------------------------

Additional information

Socket assignment on the front side of the device

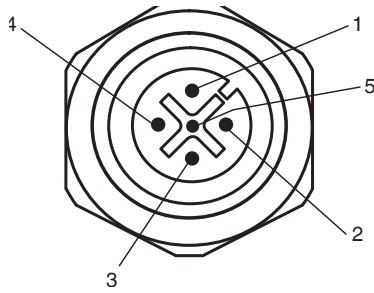

T1 - T4 transmitter control

Socket	Function
1	Transmitter channel 1
2	Transmitter channel 2
3	0 V

System accessories

- Mounting set MS SLP
- Profile alignment aid PA SLP/SLC
- Laser alignment aid BA SLP
- Ground pillar UC SLP/SLC
- Housing for pillar
- Enclosure UC SLP/SLC
- Collision protector
- Damping UC SLP/SLC
- Redirection mirror for multi-side protection of hazardous areas SLP-2-M