



CE 🚷 IO-Link

Model Number

OBT40-R101-2P1-IO-V31-IR

Triangulation sensor (BGS) M8 connector, 4-pin

Features


- Miniature design with versatile • mounting options
- Best background suppressor in its ٠ class
- Precision object detection, almost • irrespective of the color
- Extended temperature range -40°C ... 60°C
- High degree of protection IP69K
- IO-link interface for service and process data

Product information


The miniature optical sensors are the first devices of their kind to offer an end-to- end solution in a small single standard design from thru-beam sensor through to a distance measurement device. As a result of this design, the sensors are able to perform practically all standard automation tasks.

The DuraBeam laser sensors are durable and can be used in the same way as a standard sensor.

The use of Multi Pixel Technology gives the standard sensors a high level of flexibility and enables them to adapt more effectively to their operating environment.

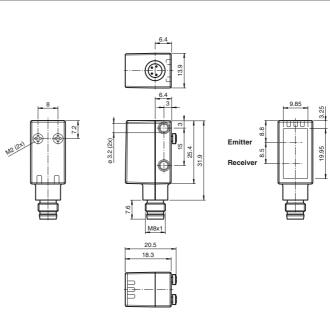


Electrical connection



Pinout



Indicators/operating means



1	Operating indicator / dark on
2	Signal indicator
3	Operating indicator / light on

Pepperl+Fuchs Group

www.pepperl-fuchs.com

Refer to "General Notes Relating to Pepperl+Fuchs Product Information" USA: +1 330 486 0001

fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111 fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com

⁵ PEPPERL+FUCHS 1

Technical data

Technical data			
General specifications			
Detection range		10 40 mm	
Detection range max.		10 50 mm	
Background suppression Reference target		starts from 50 mm standard white, 100 mm x 100 mm	
Light source		LED	
Light type		modulated infrared light 850 nm	
LED risk group labelling		exempt group	
Black/White difference (6 %/90 %))	approx. 1 mm	
Diameter of the light spot		approx. 3 mm at 40 mm	
Angle of divergence		approx. 5 ° EN 60947-5-2 : 40000 Lux	
Ambient light limit Functional safety related parame	otors	EN 60947-5-2 : 40000 Lux	
MTTF _d	ster a	600 a	
Mission Time (T _M)		20 a	
Diagnostic Coverage (DC)		0 %	
Indicators/operating means			
Operation indicator		LED green: constantly on - power on flashing (4Hz) - short circuit flashing with short break (1 Hz) - IO-Link mode	
Function indicator		LED yellow: constantly on - object detected constantly off - object not detected	
Electrical specifications			
Operating voltage	UB	10 30 V DC max. 10 %	
Ripple No-load supply current	I ₀	A at 24 V supply voltage	
Protection class	.0		
Interface			
Interface type		IO-Link (via C/Q = BK)	
Device profile		Smart Sensor	
Transfer rate IO-Link Revision		COM 2 (38.4 kBaud)	
IO-Link Revision Min. cycle time		1.1 2.3 ms	
Process data witdh		Process data input 1 Bit	
SIO mode support		Process data output 2 Bit yes	
Device ID		0x11050A (1115402)	
Compatible master port type		A	
Output Switching type			
Switching type		C/Q - Pin4: NPN normally closed / dark-on, PNP normally open / light-on, IO-Link /Q - Pin2: NPN normally open / light-on, PNP normally closed / dark-on	
Signal output		2 push-pull (4 in 1)outputs, short-circuit protected, reverse polarity protected, overvoltage protected	
Switching voltage		max. 30 V DC	
Switching current		max. 100 mA, resistive load	
Usage category Voltage drop	Ud	DC-12 and DC-13 ≤ 1.5 V DC	
Switching frequency	f	500 Hz	
Response time		1 ms	
Conformity			
Communication interface		IEC 61131-9	
Product standard		EN 60947-5-2	
Ambient conditions Ambient temperature		-40 60 °C (-40 140 °F)	
Storage temperature		-40 70 °C (-40 158 °F)	
Mechanical specifications			
Housing width		13.9 mm	
Housing height Housing depth		31.9 mm 18.3 mm	
Degree of protection		IP67 / IP69 / IP69K	
Connection		M8 x 1 connector, 4-pin	
Material			
Housing		PC (Polycarbonate)	
Optical face		PMMA	
Mass Cable length		approx. 10 g	
Cable length			
Approvals and certificates			
UL approval		E87056 , cULus Listed , class 2 power supply , type rating 1	


Accessories


IO-Link-Master02-USB IO-Link master, supply via USB port or separate power supply, LED indicators, M12 plug for sensor connection

Other suitable accessories can be found at www.pepperl-fuchs.com

Germany: +49 621 776 1111 fa-info@de.pepperl-fuchs.com

Curves/Diagrams

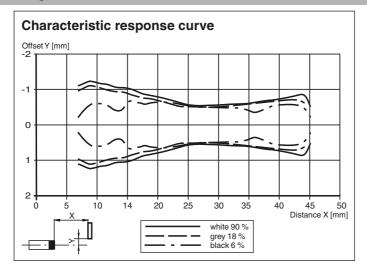

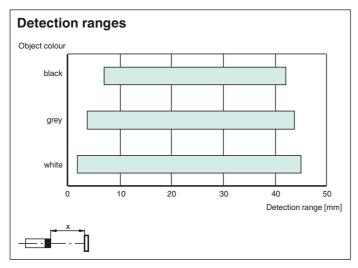

Release date: 2019-07-01 15:35 Date of issue: 2019-07-01 267075-100515_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information" Pepperl+Fuchs Group www.pepperl-fuchs.com

fa-info@us.pepperl-fuchs.com