

Reflex Sensor


U1KT001

Part Number



- 2 mutually independent switching outputs
- Miniature design
- Ready for Industrie 4.0 with IO-Link version 1.1
- Reflex and through-beam operation mode are possible

These ultrasonic sensors evaluate the sound reflected by the object. They detect almost every object and are suited especially for the filling level monitoring of fluids or bulk material or the detection of transparent objects. The sensor detects objects independent from their material, aggregate state, color or transparency. The IO-Link interface can be used to configure the reflex sensors (PNP/NPN, NC/NO, switching distance), as well as for reading out switching statuses and distance values.

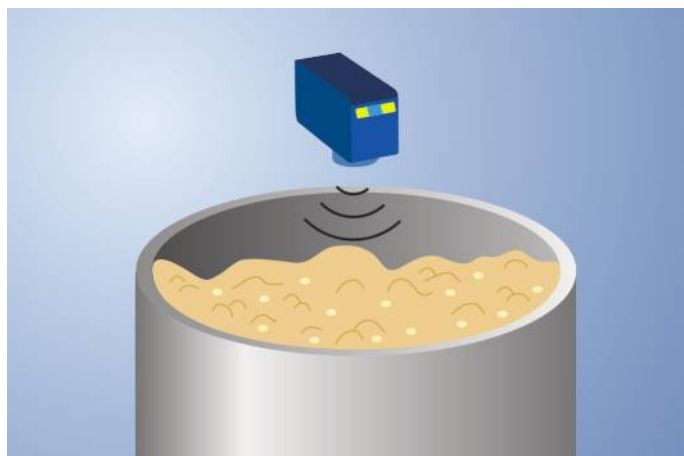

Technical Data

Ultrasonic Data

Working range, reflex sensor	30...400 mm
Working range, through-beam sensor	1...800 mm
Adjustable Range	30...400 mm
Resolution	0,5 mm
Ultrasonic Frequency	325 kHz
Opening Angle	< 12 °
Service Life (T = +25 °C)	100000 h
Switching Hysteresis	1 % *

Electrical Data

Supply Voltage	18...30 V DC
Current Consumption (U _b = 24 V)	< 20 mA
Switching frequency, reflex sensor	30 Hz
Switching frequency, through-beam sensor	70 Hz
Response time, reflex sensor	17 ms
Response time, through-beam sensor	8 ms
Temperature Range	-30...60 °C
Number of Switching Outputs	2
Switching Output Voltage Drop	< 2,5 V
Switching Output/Switching Current	100 mA
Synchronous Mode	up to 40 sensors
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Lockable	yes
Interface	IO-Link V1.1
Data Storage	yes
Protection Class	III

Mechanical Data

Setting Method	Teach-In
Housing Material	Plastic
Degree of Protection	IP68
Connection	M8 × 1; 4-pin

Safety-relevant Data

MTTFd (EN ISO 13849-1)	1106,71 a
------------------------	-----------


PNP NO	●
Programmable error output	●
IO-Link	●

Connection Diagram No.	259
Control Panel No.	A23
Suitable Connection Equipment No.	7
Suitable Mounting Technology No.	400


* Referring to the switching distance, at least 2 mm.

Complementary Products


IO-Link Master
Software

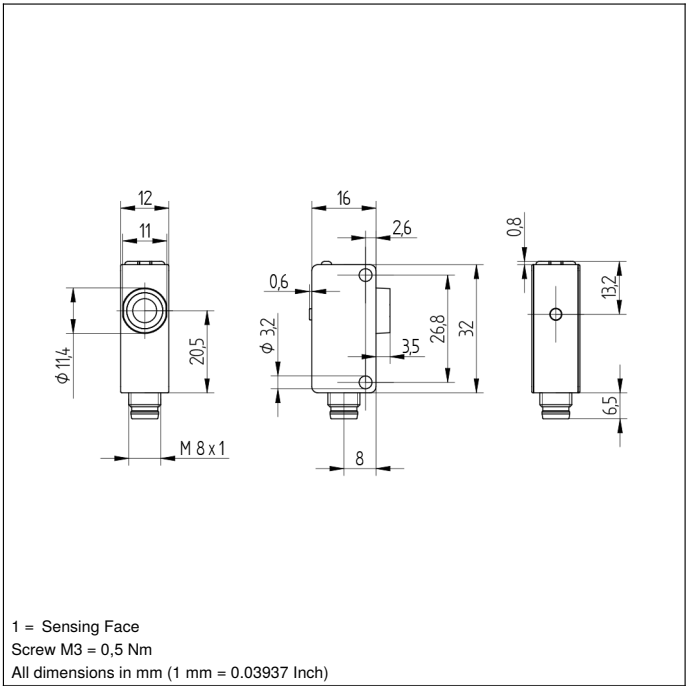

Ctrl. Panel



06 = Teach Button
5a = Switching Status Display, O1
68 = Supply Voltage Indicator
6a = Switching Status Display, O2

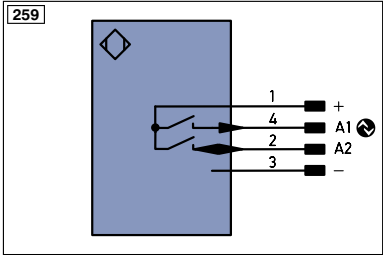

Legend

+	Supply Voltage +
-	Supply Voltage 0 V
~	Supply Voltage (AC Voltage)
A	Switching Output (NO)
Ā	Switching Output (NC)
V	Contamination/Error Output (NO)
Ṽ	Contamination/Error Output (NC)
E	Input (analog or digital)
T	Teach Input
Z	Time Delay (activation)
S	Shielding
RxD	Interface Receive Path
TxD	Interface Send Path
RDY	Ready
GND	Ground
CL	Clock
E/A	Output/Input programmable
	IO-Link
PoE	Power over Ethernet
IN	Safety Input
OSSD	Safety Output
Signal	Signal Output
BI-D +/-	Ethernet Gigabit bidirect. data line (A-D)
EN0.5A22	Encoder 0-pulse 0-0 (TTL)


PT	Platinum measuring resistor
nc	not connected
U	Test Input
Ū	Test Input inverted
W	Trigger Input
W-	Ground for the Trigger Input
O	Analog Output
O-	Ground for the Analog Output
BZ	Block Discharge
AWV	Valve Output
a	Valve Control Output +
b	Valve Control Output 0 V
SY	Synchronization
SY-	Ground for the Synchronization
E+	Receiver-Line
S+	Emitter-Line
±	Grounding
SnR	Switching Distance Reduction
Rx+/-	Ethernet Receive Path
Tx+/-	Ethernet Send Path
Bus	Interfaces-Bus A(+)/B(-)
La	Emitted Light disengageable
Mag	Magnet activation
RES	Input confirmation
EDM	Contactur Monitoring

EN0.5A22	Encoder A/Ā (TTL)
EN0.5A22	Encoder B/B̄ (TTL)
ENa	Encoder A
ENb	Encoder B
AMIN	Digital output MIN
AMAX	Digital output MAX
AOK	Digital output OK
SY in	Synchronization In
SY OUT	Synchronization OUT
OLt	Brightness output
M	Maintenance
rsv	reserved
Wire Colors according to IEC 60757	
BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink
GNYE	Green/Yellow

Characteristic response curve

Measurement of the sonic cone on a 100 x 100 mm plate

U1KT001

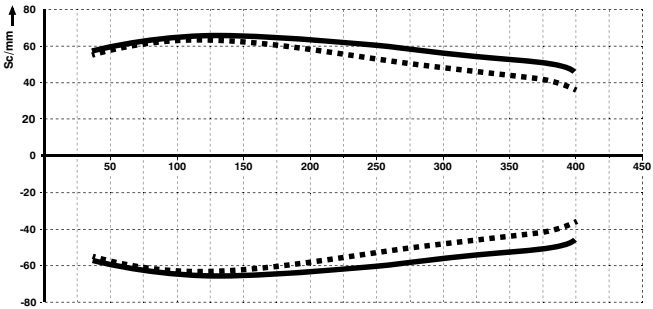

Ob = Object
Sc = Sonic cone width

— Standard
- - - Narrow

