

Technical data sheet Multiple light beam safety device receiver

Part no.: 66046200 MLD312-R3L



The Sensor People In der Braike 1, 73277 Owen

Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com

Phone: +49 7021 573-0 • Fax: +49 7021 573-199

We reserve the right to make technical changes eng • 2020-06-17

Technical data

eries	MLD 300		
Device type	Receiver		
Special design			
Special design			
Special design	Reflective element for laser alignment aid		
Functions			
Functions	Activation input for test and series connection		
	Automatic restart		
Characteristic parameters			
Гуре	2, IEC/EN 61496		
SIL	1, IEC 61508		
SILCL	1, IEC/EN 62061		
Performance Level (PL)	c, EN ISO 13849-1		
MTTF _d	204 years, EN ISO 13849-1		
PFH _D	1.2E-08 per hour		
Mission time T _M	20 years, EN ISO 13849-1		
Category	3, EN ISO 13849		
Optical data			
Number of beams	3 Piece(s)		
Number of beams Beam spacing Electrical data	3 Piece(s) 400 mm		
Beam spacing			
Beam spacing Electrical data	400 mm Overvoltage protection		
Beam spacing Electrical data Protective circuit	400 mm Overvoltage protection		
Beam spacing Electrical data Protective circuit Performance data	400 mm Overvoltage protection Short circuit protected 24 V, DC, -20 20 % 150 mA, Without external load		
Beam spacing Electrical data Protective circuit Performance data Supply voltage U _B	400 mm Overvoltage protection Short circuit protected 24 V, DC, -20 20 %		
Beam spacing Electrical data Protective circuit Performance data Supply voltage U _B Current consumption, max.	400 mm Overvoltage protection Short circuit protected 24 V, DC, -20 20 % 150 mA, Without external load		
Beam spacing Electrical data Protective circuit Performance data Supply voltage U _B Current consumption, max. Fuse	400 mm Overvoltage protection Short circuit protected 24 V, DC, -20 20 % 150 mA, Without external load		
Beam spacing Electrical data Protective circuit Performance data Supply voltage U _B Current consumption, max. Fuse Inputs Number of digital switching inputs	400 mm Overvoltage protection Short circuit protected 24 V, DC, -20 20 % 150 mA, Without external load External with max. 3 A		
Beam spacing Electrical data Protective circuit Performance data Supply voltage U _B Current consumption, max. Fuse Inputs Number of digital switching inputs Switching inputs	400 mm Overvoltage protection Short circuit protected 24 V, DC, -20 20 % 150 mA, Without external load External with max. 3 A 1 Piece(s)		
Beam spacing Electrical data Protective circuit Performance data Supply voltage U _B Current consumption, max. Fuse Inputs Number of digital switching inputs Switching inputs Type	400 mm Overvoltage protection Short circuit protected 24 V, DC, -20 20 % 150 mA, Without external load External with max. 3 A 1 Piece(s) Digital switching input		
Beam spacing Electrical data Protective circuit Performance data Supply voltage U _B Current consumption, max. Fuse Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min.	400 mm Overvoltage protection Short circuit protected 24 V, DC, -20 20 % 150 mA, Without external load External with max. 3 A 1 Piece(s) Digital switching input 18.2 V		
Beam spacing Electrical data Protective circuit Performance data Supply voltage U _B Current consumption, max. Fuse Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max.	400 mm Overvoltage protection Short circuit protected 24 V, DC, -20 20 % 150 mA, Without external load External with max. 3 A 1 Piece(s) Digital switching input 18.2 V 2.5 V		
Beam spacing Electrical data Protective circuit Performance data Supply voltage U _B Current consumption, max. Fuse Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ.	400 mm Overvoltage protection Short circuit protected 24 V, DC, -20 20 % 150 mA, Without external load External with max. 3 A 1 Piece(s) Digital switching input 18.2 V 2.5 V 2.3 V		
Beam spacing Electrical data Protective circuit Performance data Supply voltage U _B Current consumption, max. Fuse Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage low, max. Switching voltage, typ. Voltage type	400 mm Overvoltage protection Short circuit protected 24 V, DC, -20 20 % 150 mA, Without external load External with max. 3 A 1 Piece(s) Digital switching input 18.2 V 2.5 V 2.3 V DC		
Beam spacing Electrical data Protective circuit Performance data Supply voltage U _B Current consumption, max. Fuse Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ.	400 mm Overvoltage protection Short circuit protected 24 V, DC, -20 20 % 150 mA, Without external load External with max. 3 A 1 Piece(s) Digital switching input 18.2 V 2.5 V 2.3 V		
Beam spacing Electrical data Protective circuit Performance data Supply voltage U _B Current consumption, max. Fuse Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage low, max. Switching voltage, typ. Voltage type	400 mm Overvoltage protection Short circuit protected 24 V, DC, -20 20 % 150 mA, Without external load External with max. 3 A 1 Piece(s) Digital switching input 18.2 V 2.5 V 23 V DC 5 mA		
Beam spacing Electrical data Protective circuit Performance data Supply voltage U _B Current consumption, max. Fuse Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment	400 mm Overvoltage protection Short circuit protected 24 V, DC, -20 20 % 150 mA, Without external load External with max. 3 A 1 Piece(s) Digital switching input 18.2 V 2.5 V 2.3 V DC		
Beam spacing Electrical data Protective circuit Performance data Supply voltage U _B Current consumption, max. Fuse Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1	400 mm Overvoltage protection Short circuit protected 24 V, DC, -20 20 % 150 mA, Without external load External with max. 3 A 1 Piece(s) Digital switching input 18.2 V 2.5 V 23 V DC 5 mA		
Beam spacing Electrical data Protective circuit Performance data Supply voltage U _B Current consumption, max. Fuse Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment Function	400 mm Overvoltage protection Short circuit protected 24 V, DC, -20 20 % 150 mA, Without external load External with max. 3 A 1 Piece(s) Digital switching input 18.2 V 2.5 V 23 V DC 5 mA Connection 1, pin 2		
Beam spacing Electrical data Protective circuit Performance data Supply voltage U _B Current consumption, max. Fuse Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment	400 mm Overvoltage protection Short circuit protected 24 V, DC, -20 20 % 150 mA, Without external load External with max. 3 A 1 Piece(s) Digital switching input 18.2 V 2.5 V 23 V DC 5 mA Connection 1, pin 2 Test signal input		

Leuze Safety-related switching outputs Safety-related switching output OSSD 18.2 V Switching voltage high, min. 2.5 V Switching voltage low, max. Switching voltage, typ. 23 V Voltage type DC Current load, max. 380 mA Load inductivity 2,200,000 µH Load capacity 0.3 µF 0.2 mA Residual current, max. 0.002 mA Residual current, typ. Voltage drop 1 V Safety-related switching output 1 Connection 1, pin 4 Assignment Switching element Transistor, PNP **Response time** 25 ms Restart delay time 100 ms Number of connections 1 Piece(s) **Connection 1** Machine interface Type of connection Connector Thread size M12 Metal 5 -pin **Cable properties** Permissible conductor cross 0.25 mm² section, typ. 100 m Length of connection cable, max. Permissible cable resistance to 200 Ω **Mechanical data** Dimension (W x H x L) 52 mm x 900 mm x 64.7 mm Housing material Metal, Aluminum Lens cover material Plastic / PMMA Material of end caps Diecast zinc 2,000 g Housing color Yellow, RAL 1021 Type of fastening Groove mounting Swivel mount **Operation and display** LED Type of display Number of LEDs 1 Piece(s)

Environmental data

Туре

Timing

Connection

Function

Material

No. of pins

load, max.

Net weight

Ambient temperature, operation	-30 55 °C
Ambient temperature, storage	-40 75 °C
Relative humidity (non-condensing)	0 95 %

The Sensor People In der Braike 1, 73277 Owen

Leuze electronic GmbH + Co. KG

info@leuze.com • www.leuze.com Phone: +49 7021 573-0 • Fax: +49 7021 573-199 Multiple light beam safety device receiver • Part no.: 66046200 • MLD312-R3L

Technical data

Leuze


Certifications

Degree of protection	IP 67	
Protection class	III	
Certifications	c CSA US	
	c TÜV NRTL US	
	TÜV Süd	
US patents	US 6,418,546 B	
	US 7,741,595 B	

Classification

Dimensioned drawings

All dimensions in millimeters

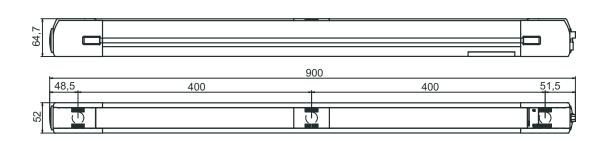

Electrical connection

Connection 1

Pin

4 5

Function	Machine interface
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

1 2 3

Pin assignment

Conductor color

+24V	Brown	
Test in	White	
0 V	Blue	3
OSSD	Black	
n.c.	Gray	
		<u> </u>

Operation and display

LED	Display	Meaning
1	Red, continuous light	OSSD off.
	Green, continuous light	OSSD on
	Red, flashing, 1 Hz	External error
	Red, flashing, 10 Hz	Internal error
	Green, flashing, 1 Hz	Weak signal, device not optimally aligned or soiled.

2

Suitable transmitters



	Part no.	Designation	Article	Description
e	66002200	MLD300-T3L	Multiple light beam safety device transmitter	Operating range: 0.5 50 m Number of beams: 3 Piece(s) Beam spacing: 400 mm Connection: Connector, M12, Metal, 5 -pin Special design: Integrated laser alignment aid

Part number code

MLD	Multiple light beam safety device
x	Series 3: MLD 300 5: MLD 500
уу	Function classes 00: transmitter 10: automatic restart 12: external testing 20: EDM/RES 30: muting 35: timing controlled 4-sensor muting
z	Device type T: transmitter R: receiver RT: transceiver xT: transmitter with high range xR: receiver for high range
а	Number of beams
b	Option L: integrated laser alignment aid (for transmitter/receiver) M: integrated status indicator (MLD 320, MLD 520) or integrated status and muting indicator (MLD 330, MLD 335, MLD 510/A, MLD 530, MLD 535) E: connection socket for external muting indicator (AS-i models only)
/t	Safety-related switching outputs (OSSDs), connection technology -: transistor output, M12 plug A: integrated AS-i interface, M12 plug, (safety bus system)
N	lote
6	A list with all available device types can be found on the Leuze website at www.leuze.com.

Accessories

Connection technology - Connection cables

 Part no.	Designation	Article	Description
50133859	KD S-M12-5A-P1-020	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Open end Shielded: Yes Cable length: 2,000 mm Sheathing material: PUR

Accessories

Leuze

	Part no.	Designation	Article	Description
	50133860	KD S-M12-5A-P1-050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Open end Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR
	50136146	KD S-M12-5A-P1-250	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Open end Shielded: Yes Cable length: 10,000 mm Sheathing material: PVC

Services

	Part no.	Designation	Article	Description
()	S981050	CS40-I-140	Safety inspection "Safety light barriers"	Details: Checking of a safety light barrier application in accordance with current standards and guidelines. Inclusion of the device and machine data in a database, production of a test log per application. Conditions: It must be possible to stop the machine, support provided by customer's employees and access to the machine for Leuze employees must be ensured. Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure.
	S981046	CS40-S-140	Start-up support	Details: For safety devices including stopping time measurement and initial inspection. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses. Restrictions: Max. 2 h., no mechanical (mounting) and electrical (wiring) work performed, no changes (attachments, wiring, programming) to third-party components in the nearby environment.

Note

♦ A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.