

Technical data sheet Multiple light beam safety device receiver

Part no.: 66566500 MLD530-XR2L



The Sensor People In der Braike 1, 73277 Owen

Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com

Phone: +49 7021 573-0 • Fax: +49 7021 573-199

We reserve the right to make technical changes eng • 2020-06-17

Technical data

Leuze

Series	MLD 500
Device type	Receiver
Special design	
Special design	Reflective element for laser alignment aid
Functions	
Functions	Alternative connection for second muting
	signal
	Contactor monitoring (EDM), selectable
	Muting enable function
	Muting-timeout extension
	Partial muting
	Sequence controlled 2-sensor muting
	Start/restart interlock (RES)
	Timing controlled 2-sensor muting
Characteristic parameters	
Туре	4, IEC/EN 61496
SIL	3, IEC 61508
SILCL	3, IEC/EN 62061
Performance Level (PL)	e, EN ISO 13849-1
MTTF _d	204 years, EN ISO 13849-1
PFH _D	6.6E-09 per hour
Mission time T _M	20 years, EN ISO 13849-1
Category	4, EN ISO 13849
Optical data	
Number of beams	2 Piece(s)
Beam spacing	500 mm
Electrical data	
Selection of operating mode	Connection 1, pin 2: +24 V for operating mode 1, 2, 4
	Connection 1, pin 2: 0 V for operating mode 3, 5, 6
	Connection 1, pin 7: +24 V for operating mode 3, 5, 6
	Connection 1, pin 7: 0 V for operating mode 1, 2, 4
Protective circuit	Overvoltage protection
	Short circuit protected
Performance data	
Supply voltage U _B	24 V, DC, -20 20 %
Supply voltage U _B Current consumption, max.	150 mA, Without external load
Supply voltage U _B	
Supply voltage U _B Current consumption, max. Fuse	150 mA, Without external load
Supply voltage U _B Current consumption, max.	150 mA, Without external load
Supply voltage U _B Current consumption, max. Fuse Inputs Number of digital switching inputs	150 mA, Without external load External with max. 3 A
Supply voltage U _B Current consumption, max. Fuse Inputs Number of digital switching inputs Switching inputs	150 mA, Without external load External with max. 3 A 4 Piece(s)
Supply voltage U _B Current consumption, max. Fuse Inputs Number of digital switching inputs Switching inputs Type	150 mA, Without external load External with max. 3 A 4 Piece(s) Digital switching input
Supply voltage U _B Current consumption, max. Fuse Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min.	150 mA, Without external load External with max. 3 A 4 Piece(s) Digital switching input 18.2 V
Supply voltage U _B Current consumption, max. Fuse Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max.	150 mA, Without external load External with max. 3 A 4 Piece(s) Digital switching input 18.2 V 2.5 V
Supply voltage U _B Current consumption, max. Fuse Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min.	150 mA, Without external load External with max. 3 A 4 Piece(s) Digital switching input 18.2 V

	Digital switching input 1	-
	Assignment	Connection 1, pin 1
	Function	Control input for start/restart interlock (RES)
	Digital switching input 2	
	Assignment	Connection 1, pin 3
	Function	Control input for contactor monitoring (EDM)
	Digital switching input 3	
	Assignment	Connection 1, pin 4
	Function	Control input, second muting signal
	Divite antiching in put 4	
	Digital switching input 4 Assignment	Connection 1 nin 8
	Function	Connection 1, pin 8
	Function	Control input, muting enable/ timeout
0	utputs	
Nu	umber of safety-related switching itputs (OSSDs)	2 Piece(s)
Νι	umber of digital switching outputs	1 Piece(s)
	Opfoto valato di sudti 11	
	Safety-related switching output	uts Safety-related switching output OSSD
	Type	18.2 V
	Switching voltage high, min.	
	Switching voltage low, max.	2.5 V
	Switching voltage, typ.	23 V
	Voltage type	DC
	Current load, max.	380 mA
	Load inductivity	2,200,000 µH
	Load capacity	0.3 µF
	Residual current, max.	0.2 mA
	Residual current, typ.	0.002 mA
	Voltage drop	1 V
	Safety-related switching ou	
	Assignment	Connection 1, pin 6
	Switching element	Transistor, PNP
	Safety-related switching ou	
		Connection 1, pin 5
	Switching element	Transistor, PNP
	Switching outputs	
	Туре	Digital switching output
	Switching voltage high, min.	18.2 V
	Switching voltage low, max.	2.5 V
	Switching voltage, typ.	23 V
	Voltage type	DC
	Switching output 1	
	Assignment	Connection 1, pin 1
	Switching element	Transistor, PNP
	Function	"State of OSSDs" signal output
Гimi	ing	
Resp	oonse time	50 ms
Rest	art delay time	100 ms
Con	nection	
lum	ber of connections	2 Piece(s)

The Sensor People In der Braike 1, 73277 Owen

Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com

Phone: +49 7021 573-0 • Fax: +49 7021 573-199 eng • 2020-06-17

We reserve the right to make technical changes

Technical data

Connection 1 Function Machine interface Type of connection Connector Thread size M12 Material Metal No. of pins 8 -pin **Connection 2** Local interface Function Type of connection Connector Thread size M12 Material Metal 5 -pin No. of pins **Cable properties** 0.25 mm² Permissible conductor cross section, typ. Length of connection cable, max. 100 m Permissible cable resistance to 200 Ω load, max. **Mechanical data** Dimension (W x H x L) 52 mm x 600 mm x 64.7 mm

,	
Housing material	Metal, Aluminum
Lens cover material	Plastic / PMMA
Material of end caps	Diecast zinc
Net weight	1,400 g
Housing color	Yellow, RAL 1021
Type of fastening	Groove mounting
	Swivel mount

Type of display	LED
Number of LEDs	2 Piece(s)
Environmental data	
Ambient temperature, operation	-30 55 °C
Ambient temperature, storage	-40 75 °C
Relative humidity (non-condensing)	0 95 %
Certifications	
Degree of protection	IP 67
Protection class	Ш
Certifications	c CSA US
	c TÜV NRTL US
	TÜV Süd
US patents	US 6,418,546 B
	US 7,741,595 B
Classification	
Customs tariff number	85365019
eCl@ss 8.0	27272703
eCl@ss 9.0	27272703
ETIM 5.0	EC001832

EC001832


Operation and display

ETIM 6.0

Leuze

Dimensioned drawings

All dimensions in millimeters

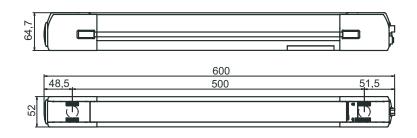

Electrical connection

Connection 1

Function	Machine interface
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

Electrical connection

Leuze

Pin Pin assignment

MS2

OSSD2

OSSD1

M-EN/TO

VIN

Pin assignment	Conductor color	
RES/OSSD status signal	White	
VIN	Brown	
EDM	Green	


Yellow

Gray

Pink

Blue

Red



Connection 2

1 2

3

4

5


6

7

8

Function	Local interface
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

Pin	Pin assignment	Conductor color
1	+24V	Brown
2	MS2	White
3	0 V	Blue
4	MS1	Black
5	RES/LMP	Gray



Operation and display

LED	Display	Meaning
1	Red, continuous light	OSSD off.
	Green, continuous light	OSSD on
	Red, flashing, 1 Hz	External error
	Red, flashing, 10 Hz	Internal error
	Green, flashing, 1 Hz	Weak signal, device not optimally aligned or soiled.
2	Yellow, continuous light	Start/restart interlock locked.

Suitable transmitters

 Part no.	Designation	Article	Description
66502500	MLD500-XT2L	Multiple light beam safety device transmitter	Operating range: 20 70 m Number of beams: 2 Piece(s) Beam spacing: 500 mm Connection: Connector, M12, Metal, 5 -pin Special design: Integrated laser alignment aid

Part number code

Part designation: MLDxyy-zab/t

MLD	Multiple light beam safety device
x	Series 3: MLD 300 5: MLD 500

Part number code

Leuze

MLD	Multiple light beam safety device
уу	Function classes 00: transmitter 10: automatic restart 12: external testing 20: EDM/RES 30: muting 35: timing controlled 4-sensor muting
z	Device type T: transmitter R: receiver RT: transceiver xT: transmitter with high range xR: receiver for high range
а	Number of beams
b	Option L: integrated laser alignment aid (for transmitter/receiver) M: integrated status indicator (MLD 320, MLD 520) or integrated status and muting indicator (MLD 330, MLD 335, MLD 510/A, MLD 530, MLD 535) E: connection socket for external muting indicator (AS-i models only)
/t	Safety-related switching outputs (OSSDs), connection technology -: transistor output, M12 plug A: integrated AS-i interface, M12 plug, (safety bus system)
Ν	lote
6	A list with all available device types can be found on the Leuze website at www.leuze.com.

Accessories

Connection technology - Connection cables

 Part no.	Designation	Article	Description
50135128	KD S-M12-8A-P1-050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connection 2: Open end Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

Mounting technology - Swivel mounts

 Part no.	Designation	Article	Description
560340	BT-SET-240BC	Mounting bracket set	Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 240° Material: Metal
540350	BT-SET-240BC-E	Mounting bracket set	Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 240° Material: Metal, Plastic

Accessories

Leuze

Services

	Part no.	Designation	Article	Description
()	S981050	CS40-I-140	Safety inspection "Safety light barriers"	Details: Checking of a safety light barrier application in accordance with current standards and guidelines. Inclusion of the device and machine data in a database, production of a test log per application. Conditions: It must be possible to stop the machine, support provided by customer's employees and access to the machine for Leuze employees must be ensured. Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure.
	S981046	CS40-S-140	Start-up support	Details: For safety devices including stopping time measurement and initial inspection. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses. Restrictions: Max. 2 h., no mechanical (mounting) and electrical (wiring) work performed, no changes (attachments, wiring, programming) to third-party components in the nearby environment.

	Note
0	A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.