

## Technical data sheet Multiple light beam safety device receiver

Part no.: 66043200 MLD312-R3



 The Sensor People
 In der Braike 1, 73277 Owen

Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com In der Braike 1, 73277 Owen Phone: +49, 7021 573-0 • Fax: +49

Phone: +49 7021 573-0 • Fax: +49 7021 573-199

## **Technical data**

# Leuze

eries	MLD 300
evice type	Receiver
unctions	
unctions	Activation input for test and series connection
	Automatic restart
	Automatic restart
haracteristic parameters	
уре	2, IEC/EN 61496
SIL	1, IEC 61508
SILCL	1, IEC/EN 62061
Performance Level (PL)	c, EN ISO 13849-1
	204 years, EN ISO 13849-1
	1.2E-08 per hour
Mission time T <sub>M</sub>	20 years, EN ISO 13849-1
Category	3, EN ISO 13849
Optical data	
lumber of beams	3 Piece(s)
Beam spacing	400 mm
Electrical data Protective circuit	Overvoltage protection
	Short circuit protected
	· · ·
Performance data	
Supply voltage U <sub>B</sub>	24 V, DC, -20 20 %
Current consumption, max.	150 mA, Without external load
Fuse	External with max. 3 A
Inputs	
Number of digital switching inputs	1 Piece(s)
<b>0 1 1 1 1</b>	
Switching inputs	Digital switching input
Туре	Digital switching input
Type Switching voltage high, min.	18.2 V
Type Switching voltage high, min. Switching voltage low, max.	18.2 V 2.5 V
Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ.	18.2 V 2.5 V 23 V
Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type	18.2 V 2.5 V 23 V DC
Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ.	18.2 V 2.5 V 23 V
Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1	18.2 V 2.5 V 23 V DC 5 mA
Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment	18.2 V 2.5 V 23 V DC 5 mA Connection 1, pin 2
Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1	18.2 V 2.5 V 23 V DC 5 mA
Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment Function	18.2 V 2.5 V 23 V DC 5 mA Connection 1, pin 2
Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment	18.2 V 2.5 V 23 V DC 5 mA Connection 1, pin 2

Number outputs (OSSDs)

Safety-related switching out	puts
Туре	Safety-related switching output OSSD
Switching voltage high, min.	18.2 V
Switching voltage low, max.	2.5 V
Switching voltage, typ.	23 V
Voltage type	DC
Current load, max.	380 mA
Load inductivity	2,200,000 µH
Load capacity	0.3 µF
Residual current, max.	0.2 mA
Residual current, typ.	0.002 mA
Voltage drop	1 V
Safety-related switching o	utput 1
Assignment	Connection 1, pin 4
Switching element	Transistor, PNP
Timing	
Response time	25 ms
Restart delay time	100 ms
Connection	
Number of connections	1 Piece(s)
Connection 1	
Function	Machine interface
Type of connection	Connector
Thread size	M12
Material	Metal
No. of pins	5 -pin
Cable properties	
Permissible conductor cross	0.25 mm²
section, typ.	
Length of connection cable, max.	100 m
Permissible cable resistance to load, max.	200 Ω
1000, 1102.	
Mechanical data	
Dimension (W x H x L)	52 mm x 900 mm x 64.7 mm
Housing material	Metal, Aluminum
Lens cover material	Plastic / PMMA
Material of end caps	Diecast zinc
Net weight	2,000 g
Housing color	Yellow, RAL 1021
Type of fastening	Groove mounting
Type of fastering	Swivel mount
	owvermount
Operation and display	
Type of display	LED
Number of LEDs	1 Piece(s)
Environmental data	
Ambient temperature, operation	-30 55 °C
	10 75 10

Ambient temperature, operation	00 00 0
Ambient temperature, storage	-40 75 °C
Relative humidity (non-condensing)	0 95 %

The Sensor People In der Braike 1, 73277 Owen

Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com Phone: +49 7021 573-0 • Fax: +49 7021 573-199 eng • 2020-06-17

## **Technical data**

## Leuze

#### Certifications


Degree of protection	IP 67	
Protection class	III	
Certifications	c CSA US	
	c TÜV NRTL US	
	TÜV Süd	
US patents	US 6,418,546 B	
	US 7,741,595 B	

#### Classification

Customs tariff number	85365019	
eCl@ss 8.0	27272703	
eCl@ss 9.0	27272703	
ETIM 5.0	EC001832	
ETIM 6.0	EC001832	

### **Dimensioned drawings**

All dimensions in millimeters

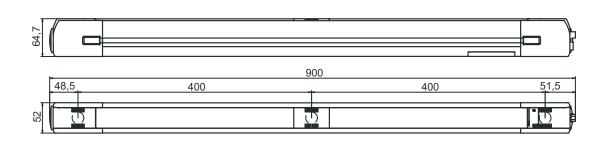

## **Electrical connection**

#### **Connection 1**

Pin

4 5

Function	Machine interface
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

#### 1 2 3

Pin assignment

#### **Conductor color**

+24V	Brown	
Test in	White	
0 V	Blue	3
OSSD	Black	2
n.c.	Gray	
		<u> </u>

## **Operation and display**

LED	Display	Meaning
1	Red, continuous light	OSSD off.
	Green, continuous light	OSSD on
	Red, flashing, 1 Hz	External error
	Red, flashing, 10 Hz	Internal error
	Green, flashing, 1 Hz	Weak signal, device not optimally aligned or soiled.

2

## Suitable transmitters



 Part no.	Designation	Article	Description
66001200	MLD300-T3	Multiple light beam safety device transmitter	Operating range: 0.5 50 m Number of beams: 3 Piece(s) Beam spacing: 400 mm Connection: Connector, M12, Metal, 5 -pin

### Part number code

MLD	Multiple light beam safety device
x	<b>Series</b> 3: MLD 300 5: MLD 500
уу	Function classes 00: transmitter 10: automatic restart 12: external testing 20: EDM/RES 30: muting 35: timing controlled 4-sensor muting
z	Device type T: transmitter R: receiver RT: transceiver xT: transmitter with high range xR: receiver for high range
а	Number of beams
b	Option L: integrated laser alignment aid (for transmitter/receiver) M: integrated status indicator (MLD 320, MLD 520) or integrated status and muting indicator (MLD 330, MLD 335, MLD 510/A, MLD 530, MLD 535) E: connection socket for external muting indicator (AS-i models only)
/t	Safety-related switching outputs (OSSDs), connection technology -: transistor output, M12 plug A: integrated AS-i interface, M12 plug, (safety bus system)
N	lote
<b>(</b> )	A list with all available device types can be found on the Leuze website at www.leuze.com.

## Accessories

## Connection technology - Connection cables

 Part no.	Designation	Article	Description
50133859	KD S-M12-5A-P1-020	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Open end Shielded: Yes Cable length: 2,000 mm Sheathing material: PUR

## Accessories

## Leuze

	Part no.	Designation	Article	Description
	50133860	KD S-M12-5A-P1-050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Open end Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR
	50136146	KD S-M12-5A-P1-250	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Open end Shielded: Yes Cable length: 10,000 mm Sheathing material: PVC

### Services

	Part no.	Designation	Article	Description
()	S981050	CS40-I-140	Safety inspection "Safety light barriers"	Details: Checking of a safety light barrier application in accordance with current standards and guidelines. Inclusion of the device and machine data in a database, production of a test log per application. Conditions: It must be possible to stop the machine, support provided by customer's employees and access to the machine for Leuze employees must be ensured. Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure.
	S981046	CS40-S-140	Start-up support	Details: For safety devices including stopping time measurement and initial inspection. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses. Restrictions: Max. 2 h., no mechanical (mounting) and electrical (wiring) work performed, no changes (attachments, wiring, programming) to third-party components in the nearby environment.

Note

♦ A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.