

Technical data sheet Diffuse sensor with background

Part no.: 50133614 HT3CL1.B/4P-M8



 Leuze electronic GmbH + Co. P

 The Sensor People
 In der Braike 1, 73277 Owen

Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com In der Braike 1, 73277 Owen Phone: +49 7021 573-0 • Fax: +49 7021 573-199

We reserve the right to make technical changes eng • 2020-07-23

3C

Diffuse reflection principle with back-

ground suppression

Technical data

Basic data

Series Operating principle

Optical data

| Black-white error | < 10% up to 170 mm | |
|--------------------------------------|----------------------------|--|
| Operating range | Guaranteed operating range | |
| Operating range, white 90% | 0.015 0.4 m | |
| Operating range, gray 18% | 0.015 0.25 m | |
| Operating range, black 6% | 0.015 0.17 m | |
| Operating range limit | Typical operating range | |
| Operating range limit | 0.015 0.4 m | |
| Adjustment range | 20 400 mm | |
| Beam path | Collimated | |
| Light source | Laser, Red | |
| Laser light wavelength | 650 nm | |
| Laser class | 1, IEC/EN 60825-1:2007 | |
| Max. laser power | 0.0018 W | |
| Transmitted-signal shape | Pulsed | |
| Pulse duration | 5.1 µs | |
| Light spot size [at sensor distance] | 1 mm [400 mm] | |
| Type of light spot geometry | Round | |
| Shift angle | Typ. ± 2° | |
| | | |

Electrical data

Protective circuit

| Performance data | |
|-------------------------------|------------------------------------|
| Supply voltage U _B | 10 30 V, DC, Incl. residual ripple |
| Residual ripple | 0 10 %, From U _B |
| Open-circuit current | 0 20 mA |
| | |

Outputs

Number of digital switching outputs 2 Piece(s)

| Switching outputs | |
|-------------------------|-----------------------------|
| Voltage type | DC |
| Switching current, max. | 100 mA |
| Switching voltage | high: ≥(U _B -2V) |
| | Low: ≤2V |
| | |
| Switching output 1 | |
| Assignment | Connection 1, pin 4 |
| Switching element | Transistor, PNP |
| Switching principle | Light switching |
| | |
| Switching output 2 | |
| Assignment | Connection 1, pin 2 |
| Switching element | Transistor, PNP |
| Switching principle | Dark switching |

Timing

| Switching frequency | 3,000 Hz |
|---------------------|----------|
| Response time | 0.16 ms |
| Decay time | 0.16 ms |
| Readiness delay | 300 ms |
| Response jitter | 55 µs |

Leuze

Connection

| Connection 1 | |
|--------------------|----------------|
| Function | Signal OUT |
| | Voltage supply |
| Type of connection | Connector |
| Thread size | M8 |
| Туре | Male |
| Material | Metal |
| No. of pins | 4 -pin |

Mechanical data

| Dimension (W x H x L) | 11.4 mm x 34.2 mm x 18.3 mm |
|----------------------------|------------------------------|
| Housing material | Plastic, PC-ABS |
| Lens cover material | Plastic / PMMA |
| Net weight | 10 g |
| Housing color | Red |
| Type of fastening | Two M3 threaded sleeves |
| | Via optional mounting device |
| Compatibility of materials | ECOLAB |
| | |
| Operation and display | |
| Type of display | LED |
| Number of LEDo | $2 \operatorname{Picco}(a)$ |

Type of display LED Number of LEDs 2 Piece(s) Operational controls Multiturn potentiometer Function of the operational control Range adjustment

Environmental data

| Ambient temperature, operation | -40 55 °C |
|--------------------------------|-----------|
| Ambient temperature, storage | -40 70 °C |

Certifications

| Degree of protection | IP 67 |
|----------------------|---------------|
| | IP 69K |
| Protection class | III |
| Certifications | c UL US |
| Standards applied | IEC 60947-5-2 |


Classification

| Customs tariff number | 85365019 |
|-----------------------|----------|
| eCl@ss 8.0 | 27270904 |
| eCl@ss 9.0 | 27270904 |
| ETIM 5.0 | EC002719 |
| ETIM 6.0 | EC002719 |

Dimensioned drawings

Leuze

All dimensions in millimeters

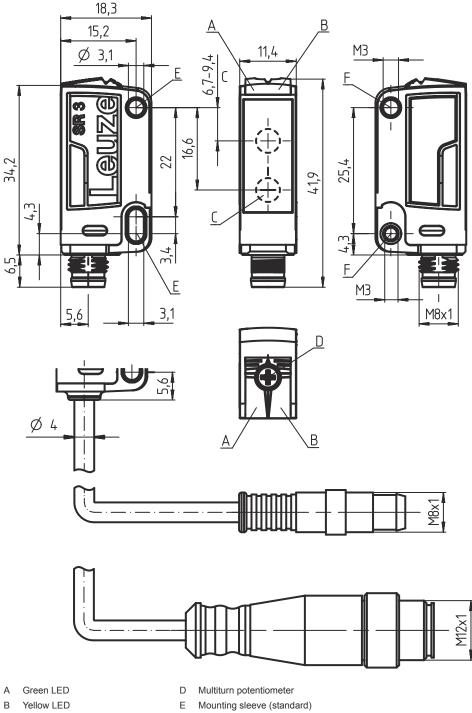

- C Optical axis
- F Threaded sleeve (3C.B series)

Electrical connection

Leuze

Connection 1


| Function | Signal OUT |
|--------------------|----------------|
| | Voltage supply |
| Type of connection | Connector |
| Thread size | M8 |
| Туре | Male |
| Material | Metal |
| No. of pins | 4 -pin |

Pin Pin assignment 1 V+ 2 OUT 2 3 GND 4 OUT 1



Diagrams

Typ. black/white behavior

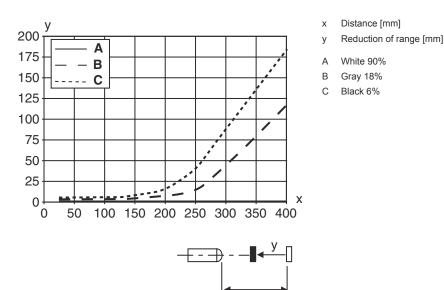

Operation and display

| LED | Display | Meaning |
|-----|--------------------------|-----------------------|
| 1 | Green, continuous light | Operational readiness |
| 2 | Yellow, continuous light | Object detected |

Part number code

Part designation: AAA 3C d EE-f.GG H/i J-K

AAA3C

Operating principle / construction

HT3C: diffuse reflection sensor with background suppression LS3C: throughbeam photoelectric sensor transmitter LE3C: throughbeam photoelectric sensor receiver PRK3C: retro-reflective photoelectric sensor with polarization filter

Part number code



| d | Light type n/a: red light I: infrared light |
|--------------|--|
| EE | Light source n/a: LED L1: laser class 1 L2: laser class 2 |
| f | Preset range (optional) n/a: operating range acc. to data sheet xxxF: preset range [mm] |
| GG | Equipment n/a: standard A: autocollimation principle (single lens) for positioning tasks B: housing model with two M3 threaded sleeves, brass F: permanently set range L: long light spot S: small light spot T: autocollimation principle (single lens) for highly transparent bottles without tracking TT: autocollimation principle (single lens) for highly transparent bottles with tracking V: V-optics XL: extra long light spot X: extended model |
| н | Operating range adjustment n/a with HT: range adjustable via 8-turn potentiometer n/a with retro-reflective photoelectric sensors (PRK): operating range not adjustable 1: 270° potentiometer 3: teach-in via button 6: auto-teach |
| I | Switching output/function OUT 1/IN: Pin 4 or black conductor 2: NPN transistor output, light switching N: NPN transistor output, dark switching 4: PNP transistor output, light switching P: PNP transistor output, dark switching 6: push-pull switching output, PNP light switching, NPN dark switching G: push-pull switching output, PNP dark switching, NPN dark switching L: IO-Link interface (SIO mode: PNP light switching, NPN dark switching) 8: activation input (activation with high signal) X: pin not used 1: IO-Link / light switching (NPN) / dark switching (PNP) |
| J | Switching output / function OUT 2/IN: pin 2 or white conductor 2: NPN transistor output, light switching N: NPN transistor output, dark switching 4: PNP transistor output, light switching 9: PNP transistor output, dark switching 6: push-pull switching output, dark switching, NPN dark switching 6: push-pull switching output, PNP light switching, NPN light switching W: warning output X: pin not used 8: activation input (activation with high signal) 9: deactivation input (deactivation with high signal) 1: teach-in via cable |
| К | Electrical connection n/a: cable, standard length 2000 mm, 4-wire 5000: cable, standard length 5000 mm, 4-wire M8: M8 connector, 4-pin (plug) M8.3: M8 connector, 3-pin (plug) 200-M8: cable, length 200 mm with M8 connector, 4-pin, axial (plug) 200-M8.3: cable, length 200 mm with M8 connector, 3-pin, axial (plug) 200-M12: cable, length 200 mm with M12 connector, 4-pin, axial (plug) |
| Note | |
| 😜 🗞 A list w | vith all available device types can be found on the Leuze website at www.leuze.com. |

Notes

Leuze

Observe intended use!

 $\ensuremath{^{t\!\!\!\!b}}$ This product is not a safety sensor and is not intended as personnel protection.

| | For UL applications: |
|---|---|
| 1 | For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code). These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7) |

| | WARNING! LASER RADIATION - CLASS 1 LASER PRODUCT |
|----------|---|
| \wedge | The device satisfies the requirements of IEC 60825-1:2007 (EN 60825-1:2007) safety regulations for a product of laser class 1 as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to "Laser Notice No. 50" from June 24, 2007. |
| * | b Observe the applicable statutory and local laser protection regulations. |
| | by The device must not be tampered with and must not be changed in any way. |
| | There are no user-serviceable parts inside the device. |
| | Repairs must only be performed by Leuze electronic GmbH + Co. KG. |

Further information

- + Light source: Average life expectancy 50,000 h at an ambient temperature of 25 $^\circ\text{C}$
- Response time: For short decay times, an ohmic load of approx. 5 kOhm is recommended
- + Sum of the output currents for both outputs, 50 mA for ambient temperatures > 40 $^\circ\text{C}$

Accessories

Connection technology - Connection cables

| | | Part no. | Designation | Article | Description |
|---|---|----------|-------------------|------------------|--|
| | Ŵ | 50130850 | KD U-M8-4A-V1-050 | Connection cable | Connection 1: Connector, M8, Axial, Female, 4 -pin Connection 2: Open end Shielded: No Cable length: 5,000 mm Sheathing material: PVC |
| • | Ŵ | 50130871 | KD U-M8-4W-V1-050 | Connection cable | Connection 1: Connector, M8, Angled, Female, 4 -pin Connection 2: Open end Shielded: No Cable length: 5,000 mm Sheathing material: PVC |

Accessories



Mounting technology - Mounting brackets

| | Part no. | Designation | Article | Description |
|---|----------|-------------|-----------------|--|
| 1 | 50060511 | BT 3 | Mounting device | Design of mounting device: Angle, L-shape Fastening, at system: Through-hole mounting Mounting bracket, at device: Screw type Type of mounting device: Rigid Material: Metal |

Mounting technology - Rod mounts

| | Part no. | Designation | Article | Description |
|---|----------|--------------|-----------------|--|
| Ê | 50117255 | BTU 200M-D12 | Mounting system | Design of mounting device: Mounting system Fastening, at system: For 12 mm rod, Sheet-metal mounting Mounting bracket, at device: Screw type, Suited for M3 screws Type of mounting device: Clampable, Adjustable, Turning, 360° Material: Metal |

| | Note |
|---|---|
| 6 | & A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page. |