




RFID Transponder IQC21-F125

- Operating frequency 13.56 MHz
- Conforms to ISO 15693
- 64 bit Fixcode
- 896 bits memory available
- Degree of protection IP65
- Self-adhesive mounting
- Can be mounted on metal

Data carrier

Dimensions

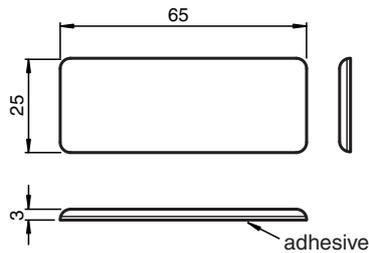

Technical Data

General specifications	
Operating frequency	13.56 MHz
Transfer rate	26 kBit/s
Memory	
Chip Type	I-CODE SLI (NXP)
EEPROM	896 Bit
UID	64 Bit
Memory organization	4 bytes/block
Read cycles	unlimited
Write cycles	> 100000
Data retention period	50 years
Directive conformity	
Radio equipment	
Directive 2014/53/EU	EN 300330
RoHS	
Directive 2011/65/EU (RoHS)	EN 50581

Release date: 2020-03-27 Date of issue: 2020-03-27 Filename: 913343_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PF PEPPERL+FUCHS

Technical Data

Standard conformity

Degree of protection	EN 60529
----------------------	----------

RFID	ISO/IEC 15693-1 ISO/IEC 15693-2 ISO/IEC 15693-3 ISO/IEC 18000-3
------	--

Ambient conditions

Ambient temperature	-25 ... 50 °C (-13 ... 122 °F)
---------------------	--------------------------------

Storage temperature	-25 ... 50 °C (-13 ... 122 °F)
---------------------	--------------------------------

Mechanical specifications

Degree of protection	IP65
----------------------	------

Material	
----------	--

Housing	ABS + Epoxy
---------	-------------

Installation	
--------------	--

On metal	yes
----------	-----

In air	yes
--------	-----

Construction type	Rectangular type
-------------------	------------------

Function

The IQC21-F125 read/write tag has been specifically designed to be mounted directly to metal. The adhesive backing is 3M type 467. The product should be applied to a thoroughly cleaned and dried surface. Typical cleaning solvents are heptane* for oily surfaces or isopropyl alcohol for plastics. Use reagent grade solvents since household materials like rubbing alcohol frequently contain oils. This can interfere with the performance of the pressure-sensitive adhesive. Provide 10-15 psi during installation so adhesive comes in direct contact with metal/plastic. Use a hard edged plastic tool to help provide the necessary pressure for proper bonding to surface. Proper adhesive application temperature is in the range 60 °F (15.6 °C) to 100 °F (38 °C). It is not recommended to apply the tag to any surface below 50 °F (10 °C) because the adhesive becomes too firm to adhere readily.

*Carefully read and follow the manufacturer's precautions and directions when using solvents.