

High-Performance Distance Sensor


UMS603U035

Part Number



- Digital and analog output
- Menu-driven settings
- Synchronous and multiplex mode
- Temperature drift eliminable

These ultrasonic sensors evaluate the sound reflected by the object. They detect almost every object and are suited especially for the filling level monitoring of fluids or bulk material or the detection of transparent objects. The sensor detects objects independent from their material, aggregate state, color or transparency. The graphic display enables easy, menu-driven sensor setup. Convenient programming and quick diagnosis is possible via the IO-Link interface.

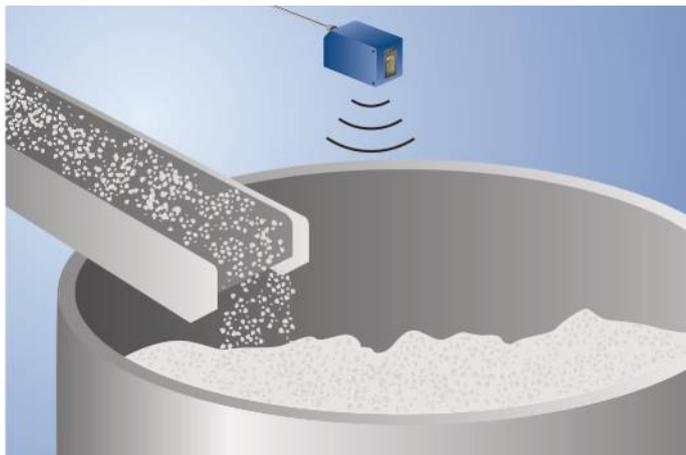

Technical Data

Ultrasonic Data	
Working Range	300...6000 mm
Measuring Range	5700 mm
Reproducibility maximum	5 mm
Linearity Deviation	20 mm
Resolution	1 mm
Ultrasonic Frequency	75 kHz
Opening Angle	< 14 °
Service Life (T = +25 °C)	100000 h
Switching Hysteresis	30 mm

Electrical Data	
Supply Voltage	18...30 V DC
Current Consumption (U _b = 24 V)	< 50 mA
Switching Frequency	1,5 Hz
Response Time	< 334 ms
Temperature Range	-25...60 °C
Number of Switching Outputs	2
Switching Output Voltage Drop	< 2,5 V
PNP Switching Output/Switching Current	100 mA
Analog Output	0...10 V/4...20 mA
Synchronous Mode	up to 40 sensors
Multiplex Mode	up to 16 sensors
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Interface	IO-Link V1.0
Protection Class	III

Mechanical Data	
Setting Method	Menu (OLED)
Housing Material	Plastic
Degree of Protection	IP67
Connection	M12 × 1; 4/5-pin

Function	
Selectable menu language	yes
Password Protection	yes


Error Output	●
PNP NO/NC switchable	●
Analog Output	●
IO-Link	●

Connection Diagram No.	183
Control Panel No.	X2
Suitable Connection Equipment No.	2 35
Suitable Mounting Technology No.	340


Display brightness may decrease with age. This does not result in any impairment of the sensor function.

Complementary Products


Analog Evaluation Unit AW02
IO-Link Master
PNP-NPN Converter BG2V1P-N-2M
Software

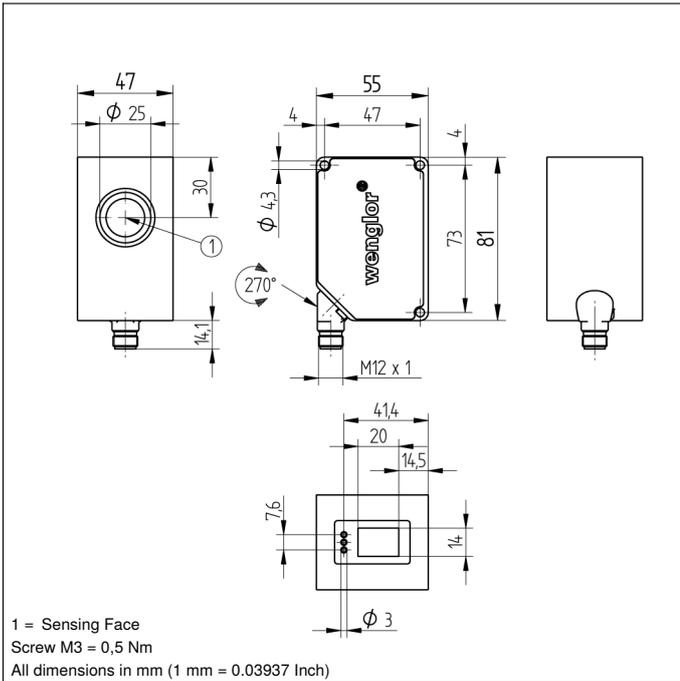

Ctrl. Panel

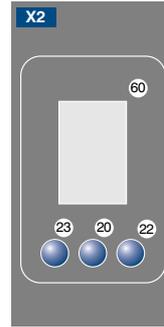

20 = Enter Button
 22 = UP Button
 23 = Down Button
 60 = Display

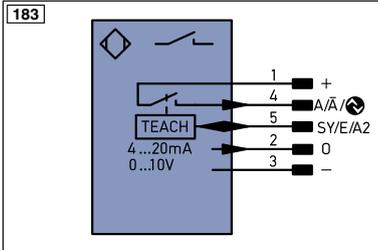


Legend

+	Supply Voltage +	PT	Platinum measuring resistor	EN ^{A/RS422}	Encoder A/Ā (TTL)
-	Supply Voltage 0 V	nc	not connected	EN ^{B/RS422}	Encoder B/B̄ (TTL)
~	Supply Voltage (AC Voltage)	U	Test Input	EN ^A	Encoder A
A	Switching Output (NO)	Ū	Test Input inverted	EN ^B	Encoder B
Ā	Switching Output (NC)	W	Trigger Input	A ^{MIN}	Digital output MIN
V	Contamination/Error Output (NO)	W-	Ground for the Trigger Input	A ^{MAX}	Digital output MAX
Ṽ	Contamination/Error Output (NC)	O	Analog Output	A ^{OK}	Digital output OK
E	Input (analog or digital)	O-	Ground for the Analog Output	SY ^{In}	Synchronization In
T	Teach Input	BZ	Block Discharge	SY ^{OUT}	Synchronization OUT
Z	Time Delay (activation)	A ^{WV}	Valve Output	OL ^T	Brightness output
S	Shielding	a	Valve Control Output +	M	Maintenance
RxD	Interface Receive Path	b	Valve Control Output 0 V	rsv	reserved
TxD	Interface Send Path	SY	Synchronization	Wire Colors according to DIN IEC 757	
RDY	Ready	SY-	Ground for the Synchronization	BK	Black
GND	Ground	E+	Receiver-Line	BN	Brown
CL	Clock	S+	Emitter-Line	RD	Red
E/A	Output/Input programmable	±	Grounding	OG	Orange
	IO-Link	S ^{nR}	Switching Distance Reduction	YE	Yellow
PoE	Power over Ethernet	Rx+/-	Ethernet Receive Path	GN	Green
IN	Safety Input	Tx+/-	Ethernet Send Path	BU	Blue
OSSD	Safety Output	Bus	Interfaces-Bus A(+)/B(-)	VT	Violet
Signal	Signal Output	L ^a	Emitted Light disengageable	GY	Grey
Bl ^D +/-	Ethernet Gigabit bidirect. data line (A-D)	Mag	Magnet activation	WH	White
EN ⁰ RS422	Encoder 0-pulse 0-0̄ (TTL)	RES	Input confirmation	PK	Pink
		EDM	Contactur Monitoring	GN ^{YE}	Green/Yellow

Characteristic response curve

Measurement of the sonic cone on a 100 × 100 mm plate

UMS603U035

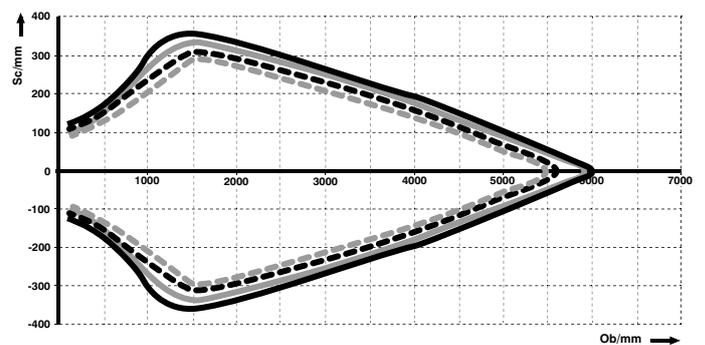

Ob = Object

Sc = Sonic cone width

— Standard

- - - Medium-width

... Narrow

- · - Extra-narrow

