

# **Technical data sheet** Multiple light beam safety device receiver

Part no.: 66065200 MLD330-R3LM



The Sensor People In der Braike 1, 73277 Owen

Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com

Phone: +49 7021 573-0 • Fax: +49 7021 573-199

We reserve the right to make technical changes eng • 2020-06-17

## **Technical data**

# Leuze

Series	MLD 300		
Device type	Receiver		
Special design			
Special design	Integrated muting indicator		
	Integrated status indicator		
	Reflective element for laser alignment aid		
Functions			
Functions	Alternative connection for second muting signal		
	Contactor monitoring (EDM), selectable		
	Muting enable function		
	Muting-timeout extension		
	Partial muting		
	Sequence controlled 2-sensor muting		
	Start/restart interlock (RES)		
	Timing controlled 2-sensor muting		
Characteristic parameters			
Туре	2, IEC/EN 61496		
SIL	1, IEC 61508		
SILCL	1, IEC/EN 62061		
Performance Level (PL)	c, EN ISO 13849-1		
MTTF <sub>d</sub>	204 years, EN ISO 13849-1		
PFH <sub>D</sub>	1.2E-08 per hour		
Mission time T <sub>M</sub>	20 years, EN ISO 13849-1		
Category	3, EN ISO 13849		
Optical data			
Number of beams	3 Piece(s)		
Beam spacing	400 mm		
Electrical data			
Selection of operating mode	Connection 1, pin 2: +24 V for operating mode 1, 2, 4		
	Connection 1, pin 2: 0 V for operating mode 3, 5, 6		
	Connection 1, pin 7: +24 V for operating mode 3, 5, 6		
	Connection 1, pin 7: 0 V for operating mode 1, 2, 4		
Protective circuit	Overvoltage protection		
	Short circuit protected		
Performance data			
Supply voltage U <sub>B</sub>	24 V, DC, -20 20 %		
	150 mA, Without external load		
Current consumption, max.			
Current consumption, max. Fuse	External with max. 3 A		
	External with max. 3 A		

Switching inputs			
Switching inputs Type	Digital switching input		
Switching voltage high, min.	18.2 V		
Switching voltage low, max.	2.5 V		
Switching voltage, typ.	23 V		
Voltage type	DC		
Switching current, max.	5 mA		
<b>3</b> • • • • •			
Digital switching input 1			
Assignment	Connection 1, pin 1		
Function	Control input for start/restart interlock (RES)		
Digital switching input 2			
Assignment	Connection 1, pin 3		
Function	Control input for contactor monitoring (EDM)		
Digital switching input 3			
Assignment	Connection 1, pin 4		
Function	Control input, second muting signal		
Distitut overheimer terret d			
Digital switching input 4 Assignment	Connection 1, pin 8		
Function	Control input, muting enable/ timeout		
Function	Control input, muting enabler timeout		
utputs			
Imber of safety-related switching	2 Piece(s)		
tputs (OSSDs)			
tputs (OSSDs) Imber of digital switching outputs	1 Piece(s)		
imber of digital switching outputs			
umber of digital switching outputs Safety-related switching outp	uts		
umber of digital switching outputs Safety-related switching outp Type	uts Safety-related switching output OSSD		
umber of digital switching outputs Safety-related switching outp Type Switching voltage high, min.	uts Safety-related switching output OSSD 18.2 V		
umber of digital switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max.	uts Safety-related switching output OSSD		
Safety-related switching outputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ.	uts Safety-related switching output OSSD 18.2 V 2.5 V		
umber of digital switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max.	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V		
Safety-related switching outputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC		
Safety-related switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH		
Safety-related switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max.	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA		
Safety-related switching outputs System of digital switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 μH 0.3 μF		
Safety-related switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max.	uts           Safety-related switching output OSSD           18.2 V           2.5 V           23 V           DC           380 mA           2,200,000 μH           0.3 μF           0.2 mA		
Safety-related switching outputs System of digital switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ.	uts           Safety-related switching output OSSD           18.2 V           2.5 V           23 V           DC           380 mA           2,200,000 μH           0.3 μF           0.2 mA           0.002 mA		
Imber of digital switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 μH 0.3 μF 0.2 mA 0.002 mA 1 V tput 1		
Imber of digital switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment	uts           Safety-related switching output OSSD           18.2 V           2.5 V           23 V           DC           380 mA           2,200,000 μH           0.3 μF           0.202 mA           1 V           tput 1           Connection 1, pin 6		
Imber of digital switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 μH 0.3 μF 0.2 mA 0.002 mA 1 V tput 1		
Imber of digital switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element	uts           Safety-related switching output OSSD           18.2 V           2.5 V           23 V           DC           380 mA           2,200,000 μH           0.3 μF           0.2 mA           0.002 mA           1 V           tput 1           Connection 1, pin 6           Transistor, PNP		
Imber of digital switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Safety-related switching ou	uts           Safety-related switching output OSSD           18.2 V           2.5 V           23 V           DC           380 mA           2,200,000 μH           0.3 μF           0.2 mA           0.002 mA           1 V           tput 1           Connection 1, pin 6           Transistor, PNP           tput 2		
Safety-related switching outputs Switching voltage high, min. Switching voltage low, max. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Safety-related switching ou Assignment	uts           Safety-related switching output OSSD           18.2 V           2.5 V           23 V           DC           380 mA           2,200,000 μH           0.3 μF           0.2 mA           0.002 mA           1 V           tput 1           Connection 1, pin 6           Transistor, PNP		
Imber of digital switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Safety-related switching ou	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V tput 1 Connection 1, pin 6 Transistor, PNP tput 2 Connection 1, pin 5		
Safety-related switching outputs Switching voltage high, min. Switching voltage low, max. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Safety-related switching ou Assignment	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V tput 1 Connection 1, pin 6 Transistor, PNP tput 2 Connection 1, pin 5		
Safety-related switching outputs Switching voltage high, min. Switching voltage low, max. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Switching element	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V tput 1 Connection 1, pin 6 Transistor, PNP tput 2 Connection 1, pin 5		
Safety-related switching outputs Switching voltage high, min. Switching voltage low, max. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Switching element Switching element	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V tput 1 Connection 1, pin 6 Transistor, PNP tput 2 Connection 1, pin 5 Transistor, PNP		
Safety-related switching outputs Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Switching element Switching element Switching element Switching outputs Type	Auts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V Connection 1, pin 6 Transistor, PNP tput 2 Connection 1, pin 5 Transistor, PNP		
Safety-related switching outputs Switching voltage high, min. Switching voltage low, max. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Switching element Switching element Switching outputs Type Switching voltage high, min.	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 μH 0.3 μF 0.2 mA 0.002 mA 1 V tput 1 Connection 1, pin 6 Transistor, PNP tput 2 Connection 1, pin 5 Transistor, PNP		
Safety-related switching outputs         Safety-related switching outp         Type         Switching voltage high, min.         Switching voltage low, max.         Switching voltage, typ.         Voltage type         Current load, max.         Load inductivity         Load capacity         Residual current, max.         Residual current, typ.         Voltage drop         Safety-related switching outputs         Switching element         Switching element         Switching outputs         Type         Switching voltage high, min.         Switching voltage high, min.         Switching voltage high, min.	uts           Safety-related switching output OSSD           18.2 V           2.5 V           23 V           DC           380 mA           2,200,000 μH           0.3 μF           0.2 mA           0.002 mA           1 V           tput 1           Connection 1, pin 6           Transistor, PNP           tput 2           Connection 1, pin 5           Transistor, PNP           Digital switching output           18.2 V           2.5 V		
Safety-related switching outputs         Safety-related switching outp         Type         Switching voltage high, min.         Switching voltage low, max.         Switching voltage, typ.         Voltage type         Current load, max.         Load inductivity         Load capacity         Residual current, max.         Residual current, typ.         Voltage drop         Safety-related switching outputs         Switching element         Switching element         Switching outputs         Type         Switching voltage high, min.	uts         Safety-related switching output OSSD         18.2 V         2.5 V         23 V         DC         380 mA         2,200,000 μH         0.3 μF         0.2 mA         0.002 mA         1 V         tput 1         Connection 1, pin 6         Transistor, PNP         tput 2         Connection 1, pin 5         Transistor, PNP         Digital switching output         18.2 V         2.5 V		
Safety-related switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Switching element Switching outputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching output 1	uts         Safety-related switching output OSSD         18.2 V         2.5 V         23 V         DC         380 mA         2,200,000 μH         0.3 μF         0.2 mA         0.002 mA         1 V         tput 1         Connection 1, pin 6         Transistor, PNP         tput 2         Connection 1, pin 5         Transistor, PNP         Digital switching output         18.2 V         2.5 V         23 V         DC		
Safety-related switching outputs         Safety-related switching outp         Type         Switching voltage high, min.         Switching voltage low, max.         Switching voltage, typ.         Voltage type         Current load, max.         Load inductivity         Load capacity         Residual current, max.         Residual current, typ.         Voltage drop         Safety-related switching out         Assignment         Switching element         Switching outputs         Type         Switching voltage high, min.         Switching voltage high, min.	uts         Safety-related switching output OSSD         18.2 V         2.5 V         23 V         DC         380 mA         2,200,000 μH         0.3 μF         0.2 mA         0.002 mA         1 V         tput 1         Connection 1, pin 6         Transistor, PNP         tput 2         Connection 1, pin 5         Transistor, PNP         Digital switching output         18.2 V         2.5 V		

 Leuze electronic GmbH + Co. KG
 info@leuze.com • www.leuze.com
 We reserve the rig

 The Sensor People
 In der Braike 1, 73277 Owen
 Phone: +49 7021 573-0 • Fax: +49 7021 573-199
 We reserve the rig

## **Technical data**

#### Timing

Response time	50 ms	
Restart delay time	100 ms	
Connection		
Number of connections	2 Piece(s)	
Connection 1		
Function	Machine interface	
Type of connection	Connector	
Thread size	M12	
Material	Metal	
No. of pins	8 -pin	
Connection 2 Function	Local interface	
Type of connection	Connector	
Thread size	M12	
Material	Metal	
No. of pins	5 -pin	
Cable properties		
Permissible conductor cross section, typ.	0.25 mm <sup>2</sup>	
Length of connection cable, max.	100 m	
Permissible cable resistance to load, max.	200 Ω	

Operation and display		
Type of display	Integrated muting indicator	
	LED	
Number of LEDs	2 Piece(s)	
Environmental data		
Ambient temperature, operation	-30 55 °C	
Ambient temperature, storage	-40 75 °C	
Relative humidity (non-condensing)	0 95 %	
Certifications		
Degree of protection	IP 67	
Protection class	III	
Certifications	c CSA US	
	c TÜV NRTL US	
	TÜV Süd	
US patents	US 6,418,546 B	
	US 7,741,595 B	
Classification		
Customs tariff number	85365019	
eCl@ss 8.0	27272703	
eCl@ss 9.0	27272703	
ETIM 5.0	E000 (000	
ETIM 5.0	EC001832	


Leuze

#### Mechanical data

Dimension (W x H x L)	52 mm x 900 mm x 64.7 mm	
Housing material	Metal, Aluminum	
Lens cover material	Plastic / PMMA	
Material of end caps	Diecast zinc	
Net weight	2,000 g	
Housing color	Yellow, RAL 1021	
Type of fastening	Groove mounting	
	Swivel mount	

## **Dimensioned drawings**

All dimensions in millimeters

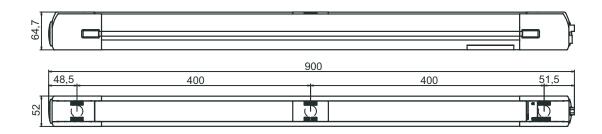

## **Electrical connection**

# Leuze


#### **Connection 1**

Function	Machine interface
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

# Pin Pin assignment

#### **Conductor color**


1	RES	White
2	VIN	Brown
3	EDM	Green
4	MS2	Yellow
5	OSSD2	Gray
6	OSSD1	Pink
7	VIN	Blue
8	M-EN/TO	Red



#### **Connection 2**

Function	Local interface
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

Pin	Pin assignment	Conductor color	
1	+24V	Brown	
2	MS2	White	
3	0 V	Blue	
4	MS1	Black	
5	RES/LMP	Gray	



## **Operation and display**

LED	Display	Meaning
1	Red, continuous light	OSSD off.
	Green, continuous light	OSSD on
	Red, flashing, 1 Hz	External error
	Red, flashing, 10 Hz	Internal error
	Green, flashing, 1 Hz	Weak signal, device not optimally aligned or soiled.
2	Yellow, continuous light	Start/restart interlock locked.

## Suitable transmitters

# Leuze

 Part no.	Designation	Article	Description
66002200	MLD300-T3L	Multiple light beam safety device transmitter	Operating range: 0.5 50 m Number of beams: 3 Piece(s) Beam spacing: 400 mm Connection: Connector, M12, Metal, 5 -pin Special design: Integrated laser alignment aid

### Part number code

MLD	Multiple light beam safety device
x	<b>Series</b> 3: MLD 300 5: MLD 500
уу	Function classes 00: transmitter 10: automatic restart 12: external testing 20: EDM/RES 30: muting 35: timing controlled 4-sensor muting
z	Device type T: transmitter R: receiver RT: transceiver xT: transmitter with high range xR: receiver for high range
а	Number of beams
b	Option L: integrated laser alignment aid (for transmitter/receiver) M: integrated status indicator (MLD 320, MLD 520) or integrated status and muting indicator (MLD 330, MLD 335, MLD 510/A, MLD 530, MLD 535) E: connection socket for external muting indicator (AS-i models only)
/t	Safety-related switching outputs (OSSDs), connection technology -: transistor output, M12 plug A: integrated AS-i interface, M12 plug, (safety bus system)
N	lote
<b>(</b> )	A list with all available device types can be found on the Leuze website at www.leuze.com.

## Accessories

## Connection technology - Connection cables

 Part no.	Designation	Article	Description
50133859	KD S-M12-5A-P1-020	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Open end Shielded: Yes Cable length: 2,000 mm Sheathing material: PUR

## Acc

 ht beam saf	-	eiver • Part no.: 66065200	Leuze	
	Part no.	Designation	Article	Description
	50136146	KD S-M12-5A-P1-250	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Open end Shielded: Yes Cable length: 10,000 mm Sheathing material: PVC
	50135128	KD S-M12-8A-P1-050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connection 2: Open end Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

### Services

	Part no.	Designation	Article	Description
()	S981050	CS40-I-140	Safety inspection "Safety light barriers"	Details: Checking of a safety light barrier application in accordance with current standards and guidelines. Inclusion of the device and machine data in a database, production of a test log per application. Conditions: It must be possible to stop the machine, support provided by customer's employees and access to the machine for Leuze employees must be ensured. Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure.
с. С	S981046	CS40-S-140	Start-up support	Details: For safety devices including stopping time measurement and initial inspection. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses. Restrictions: Max. 2 h., no mechanical (mounting) and electrical (wiring) work performed, no changes (attachments, wiring, programming) to third-party components in the nearby environment.



the A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.