




## Inductive sensor NBN30-L2-A2-C-V1

- Sensor head bidirectional and rotatable
- Basic series
- Quick mounting bracket
- 4-way LED indicator
- Weld Immune



### Dimensions

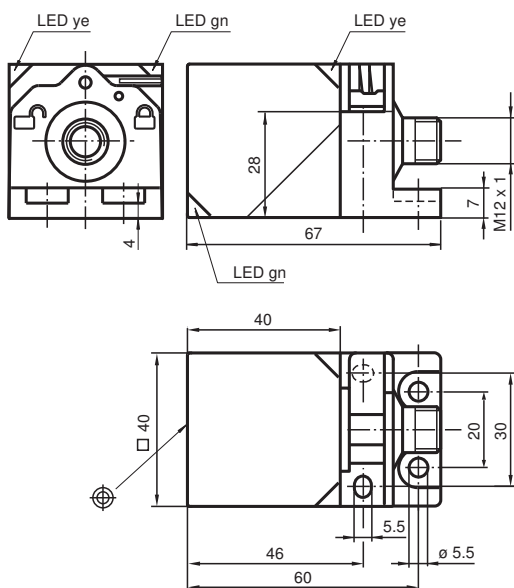

### Technical Data

#### General specifications

|                              |       |                   |
|------------------------------|-------|-------------------|
| Switching function           |       | complementary     |
| Output type                  |       | PNP               |
| Rated operating distance     | $s_n$ | 30 mm             |
| Installation                 |       | non-flush         |
| Output polarity              |       | DC                |
| Assured operating distance   | $s_a$ | 0 ... 24.3 mm     |
| Actual operating distance    | $s_r$ | 27 ... 33 mm typ. |
| Reduction factor $r_{Al}$    |       | 0.31              |
| Reduction factor $r_{Cu}$    |       | 0.3               |
| Reduction factor $r_{304}$   |       | 0.74              |
| Reduction factor $r_{Brass}$ |       | 0.31              |
| Output type                  |       | 4-wire            |

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**PEPPERL+FUCHS**

## Technical Data

### Nominal ratings

|                                |       |                            |
|--------------------------------|-------|----------------------------|
| Operating voltage              | $U_B$ | 10 ... 30 V                |
| Switching frequency            | $f$   | 0 ... 5 Hz                 |
| Hysteresis                     | $H$   | typ. 5 %                   |
| Reverse polarity protection    |       | reverse polarity protected |
| Short-circuit protection       |       | pulsing                    |
| Voltage drop                   | $U_d$ | $\leq 3$ V                 |
| Operating current              | $I_L$ | 0 ... 200 mA               |
| Off-state current              | $I_r$ | 0 ... 0.5 mA               |
| No-load supply current         | $I_0$ | $\leq 20$ mA               |
| Time delay before availability | $t_v$ | 300 ms                     |
| Operating voltage indicator    |       | LED, green                 |
| Switching state indicator      |       | LED, yellow                |

### Functional safety related parameters

|                          |  |        |
|--------------------------|--|--------|
| MTTF <sub>d</sub>        |  | 1170 a |
| Mission Time ( $T_M$ )   |  | 20 a   |
| Diagnostic Coverage (DC) |  | 0 %    |

### Compliance with standards and directives

|                     |  |                                                                                             |
|---------------------|--|---------------------------------------------------------------------------------------------|
| Standard conformity |  |                                                                                             |
| Standards           |  | EN 60947-5-2:2007<br>EN 60947-5-2/A1:2012<br>IEC 60947-5-2:2007<br>IEC 60947-5-2 AMD 1:2012 |

### Approvals and certificates

|                                 |           |                                                                    |
|---------------------------------|-----------|--------------------------------------------------------------------|
| Protection class                |           | II                                                                 |
| Rated insulation voltage        | $U_i$     | 253 V                                                              |
| Rated impulse withstand voltage | $U_{imp}$ | 4000 V                                                             |
| UL approval                     |           | cULus Listed, General Purpose                                      |
| CCC approval                    |           | CCC approval / marking not required for products rated $\leq 36$ V |


### Ambient conditions

|                     |  |                                |
|---------------------|--|--------------------------------|
| Ambient temperature |  | -25 ... 85 °C (-13 ... 185 °F) |
| Storage temperature |  | -25 ... 85 °C (-13 ... 185 °F) |


### Mechanical specifications

|                      |  |                                |
|----------------------|--|--------------------------------|
| Connection type      |  | Connector plug M12 x 1 , 4-pin |
| Housing material     |  | PA                             |
| Sensing face         |  | PA                             |
| Degree of protection |  | IP69K                          |
| Mass                 |  | 130 g                          |

## Connection



Connection Assignment



Wire colors in accordance with EN 60947-5-2

|   |    |         |
|---|----|---------|
| 1 | BN | (brown) |
| 2 | WH | (white) |
| 3 | BU | (blue)  |
| 4 | BK | (black) |

Accessories

|                                                                                     |                    |                                       |
|-------------------------------------------------------------------------------------|--------------------|---------------------------------------|
|    | <b>MHW 01</b>      | Modular mounting bracket              |
|    | <b>MH 02-L</b>     | Mounting aid                          |
|   | <b>V1-W-2M-PUR</b> | Female cordset, M12, 4-pin, PUR cable |
|  | <b>V1-G-2M-PUR</b> | Female cordset, M12, 4-pin, PUR cable |

Release date: 2020-03-23 Date of issue: 2020-03-30 Filename: 181504\_eng.pdf