


Inductive sensors special versions

IFRM 08P3707

dimension drawing



general data

mounting type	flush
special type	high temperature
nominal sensing distance Sn	2 mm
temperature drift	$\pm 10\% (-25 \dots +75^\circ\text{C})$ $-10\% / +15\% (-25 \dots +100^\circ\text{C})$
hysteresis	3 ... 20 % of Sr


photo



electrical data

switching frequency	< 5 kHz
voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	12 mA
output circuit	PNP break function (NC)
voltage drop Vd	< 3 VDC
output current	< 100 mA
short circuit protection	yes
reverse polarity protection	yes

connection diagram

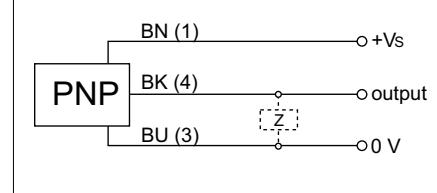

mechanical data

type	cylindrical threaded
housing material	stainless steel
dimension	8 mm
housing length	30 mm
connection types	cable FEP, 1 m

ambient conditions

operating temperature	-25 ... +100 °C
protection class	IP 67

• with integral electronics of up to +100 °C