

**Model number****VAA-4E4A-CB1-Z/E2**

Printed circuit board module encapsulated in housing for expansion to 8 inputs/8 outputs

Features

- Integrated communication monitoring function
- Inputs and outputs short-circuit and overload proof
- No external power supply required
- Connection via removable screw terminals

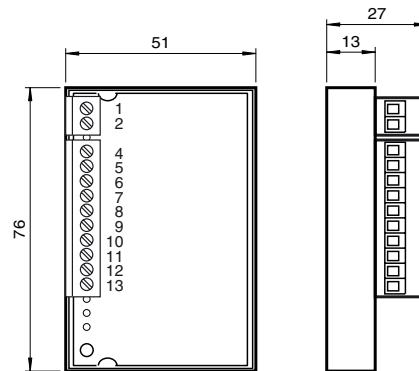
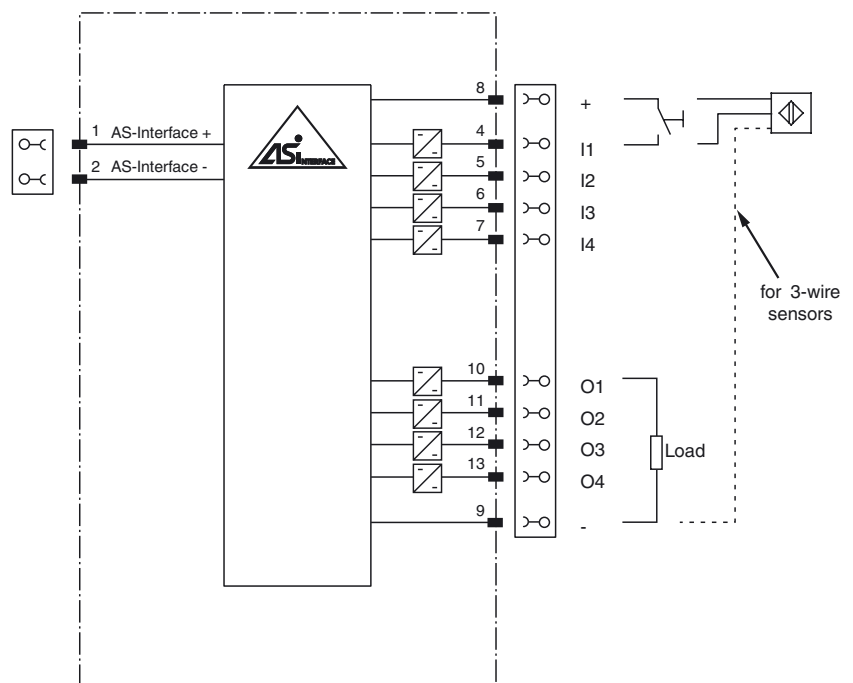

Function

The AS-Interface connecting module is ideal for integrating custom electronics, such as illuminated pushbuttons or LED lights. The PCB is supplied with power entirely via AS-Interface. The inputs and outputs are resistant to short circuits and overloading. The display and control elements and AS-Interface are connected via cable strands.

A signal indicating an overload of the outputs is transmitted to the AS-Interface master via the "peripheral fault" function. The communication via AS-Interface remains unaffected.

Note:

A communication monitoring function is integrated into the system. This function disconnects the outputs from the power supply when no communication is taking place on the AS-Interface line.

Dimensions**Electrical connection****Indicating / Operating means**

Technical data**General specifications**

Slave type	Standard slave
AS-Interface specification	V2.0
Required master specification	≥ V2.0
UL File Number	E223772

Electrical specifications

Rated operating voltage	U_e	26.5 ... 31.6 V from AS-Interface
Rated operating current	I_e	≤ 30 mA (without sensors) / max. 180 mA
Protection class		III
Surge protection		U_e : Over voltage category III, safe isolated power supplies (PELV)

Input

Number/Type	4 inputs for 2- or 3-wire sensors (PNP), DC
Supply	from AS-Interface
Voltage	21 ... 31 V
Input current	≤ 8 mA (limited internally)
Switching point	according to EN 61131-2 Typ 1
0 (unattenuated)	≤ 1.5 mA
1 (attenuated)	≥ 4 mA

Output

Number/Type	4 electronic outputs, PNP
Supply	from AS-Interface
Voltage	21 ... 31 V
Current	≤ 100 mA per output, ≤ 140 mA total

Directive conformity

Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013 EN 61000-6-4:2007 EN 62026-2:2015

Standard conformity

Degree of protection	EN 60529:2000
Fieldbus standard	EN 62026-2:2013
Input	EN 61131-2:2015
Emitted interference	EN 61000-6-4:2007
AS-Interface	EN 62026-2:2013
Noise immunity	EN 61326-1:2013

Programming instructions

Profile	S-7.0
IO code	7
ID code	0
ID1 code	F
ID2 code	E

Data bits (function via AS-Interface)	input	output
D0	IN1	OUT1
D1	IN2	OUT2
D2	IN3	OUT3
D3	IN4	OUT4

Parameter bits (programmable via AS-i) function

P0	not used
P1	not used
P2	not used
P3	not used

Ambient conditions

Ambient temperature	-25 ... 60 °C (-13 ... 140 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Relative humidity	85 % , noncondensing
Climatic conditions	For indoor use only
Altitude	≤ 2000 m above MSL
Pollution degree	2

Mechanical specifications

Connection	screw terminals, removable rated connection capacity: rigid/flexible (with and without wire-end ferrules): 0.25 mm ² ... 1.5 mm ² In case of wire end ferrule with plastic sleeve: 0.25 mm ² ... 0.5 mm ² On connection of multiple conductors when using two conductors with the same cross section: Flexible with twin wire end ferrule:
Tightening torque of clamping screws	0.22 ... 0.25 Nm



Notes

LED displays are to be used to avoid exceeding the max. current.

When the module is installed in the VAA-LT3-F86-V1 Illuminated pushbutton module, the current load on the installed modules must not exceed 140 mA (equivalent to 4 W power consumption for indicating instruments).