



## 2-D LiDAR Sensor

### OMD8000-R2100-B16-2V15



- Distance measurement using object
- Two-dimensional measurement with no moving parts
- Measurement using eye-safe LED technology
- 88° scanning angle
- CANopen interface
- Measuring method PRT (Pulse Ranging Technology)


Multi-ray LED scanner for measuring the distance to an object, measuring method: PRT, measuring range: up to 8 m on white, 2x M12 plugs



#### Function

The new 2-dimensional multi-ray LED scanner uses tried-and-tested Pulse Ranging Technology and boasts a wide range of user-friendly features. The eye-safe LED technology in the sensor allows it to be used by personnel in all working areas without posing a danger. The 11 emitter elements arranged side by side span a scanning range of 88 degrees, while the emitter LEDs set themselves apart through their large light spot. Measuring on a surface rather than on a point makes it easier to measure inhomogeneous surfaces. A further highlight is the absence of any moving parts such as a motor or bearings, which makes the device less complex in its design and more resistant to mechanical stress.

Dimensions

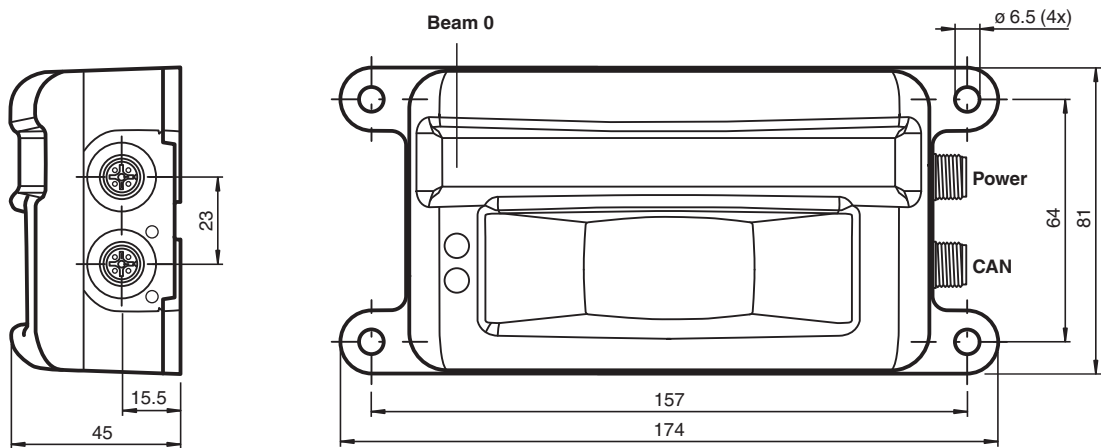

Technical Data


<b>General specifications</b>		
Measurement range		0.2 ... 2 m (bw 6%) 0.2 to 8 m (wh 90%)
Light source		IREd
Light type		modulated infrared light , 850 nm
Measuring method		Pulse Ranging Technology (PRT)
Scan rate		50 s <sup>-1</sup> (1 scan = 11 measurements)
Scanning angle		88°
Diameter of the light spot		550 mm at 4 m (orthogonal)
Ambient light limit		> 80000 Lux
Resolution		1 mm
<b>Functional safety related parameters</b>		
MTTF <sub>d</sub>		123 a
Mission Time (T <sub>M</sub> )		20 a
Diagnostic Coverage (DC)		0 %
<b>Indicators/operating means</b>		
Operation indicator		LED green
Data flow indicator		LED red: CAN Error LED green: CAN Run
Function indicator		LED yellow
<b>Electrical specifications</b>		
Operating voltage	U <sub>B</sub>	10 ... 30 V DC
Ripple		10 % within the supply tolerance

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".


## Technical Data

No-load supply current	$I_0$	$\leq 120 \text{ mA} / 24 \text{ V DC}$
Protection class		III
Time delay before availability	$t_v$	$< 3 \text{ s}$
<b>Interface</b>		
Interface type		CAN
Protocol		CANopen, 250 kbit/s
<b>Conformity</b>		
Product standard		EN 60947-5-2
<b>Measurement accuracy</b>		
Measured value noise		20 mm (1 sigma, 4 m on white, orthogonal)
Angle resolution		$8^\circ$
Absolute accuracy		$\pm 50 \text{ mm}$ (orthogonal)
<b>Approvals and certificates</b>		
UL approval		cULus Listed, Class 2 Power Source, Type 1 enclosure
CCC approval		CCC approval / marking not required for products rated $\leq 36 \text{ V}$
<b>Ambient conditions</b>		
Ambient temperature		$-30 \dots 60^\circ\text{C}$ ( $-22 \dots 140^\circ\text{F}$ )
Storage temperature		$-30 \dots 70^\circ\text{C}$ ( $-22 \dots 158^\circ\text{F}$ )
Relative humidity		95 % , no moisture condensation
<b>Mechanical specifications</b>		
Housing width		81 mm
Housing height		45 mm
Degree of protection		IP67
Connection		5-pin, M12x1 connector, standard (supply; color black) 5-pin, M12x1 connector, standard (CANopen; color grey)
<b>Material</b>		
Housing		plastic
Optical face		Lexan (PC)
Mass		approx. 250 g



## Connection Assignment

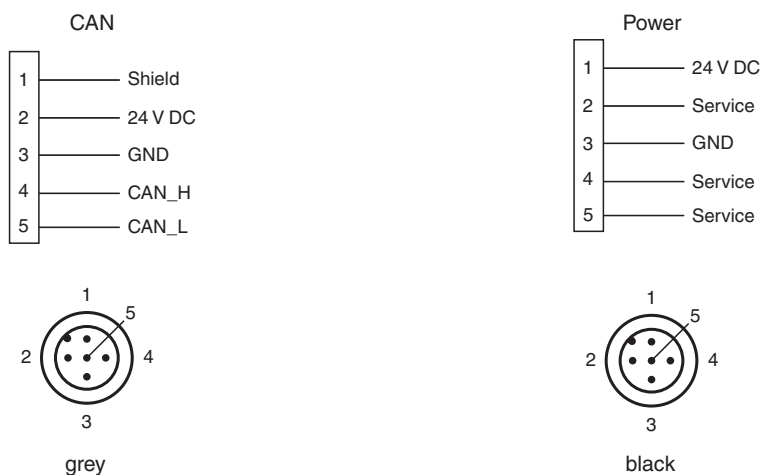

Assembly

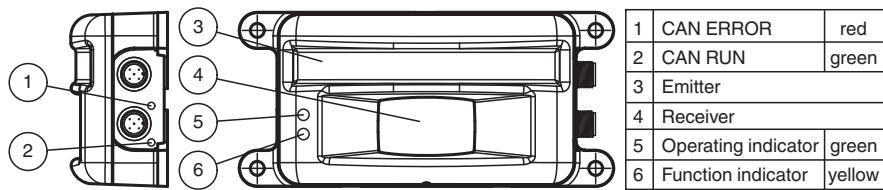

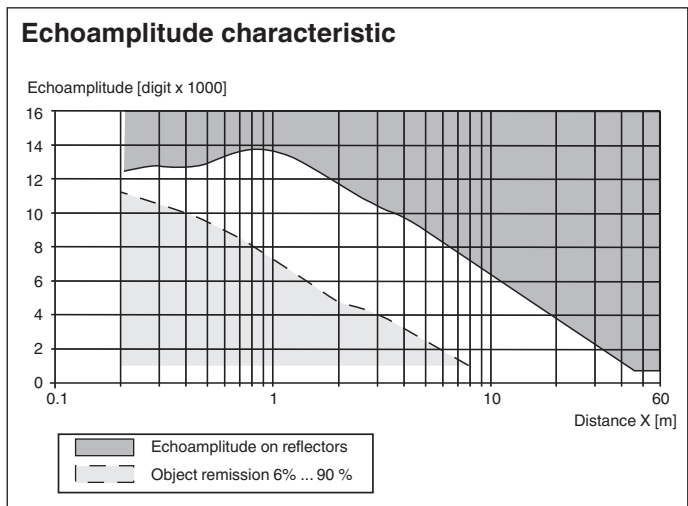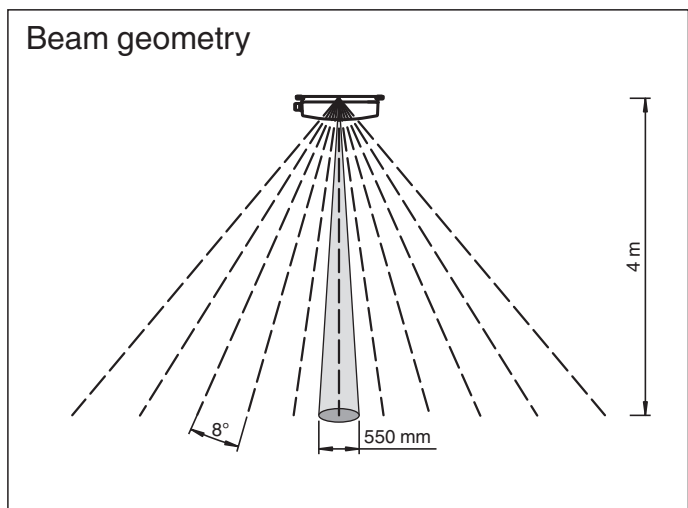


Characteristic Curve



Accessories

	V1-G-2M-PUR	Female cordset, M12, 4-pin, PUR cable
	V1-W-2M-PUR	Female cordset, M12, 4-pin, PUR cable

**Accessories**

	<b>V15-G-5M-PUR-ABG</b>	Female cordset single-ended M12 A-coded, 5-pin, PUR cable black, shielded
	<b>V1-G-BK5M-PUR-U</b>	Female cordset, M12, 4-pin, PUR cable
	<b>V1-W-BK5M-PUR-U</b>	Female cordset, M12, 4-pin, PUR cable