

IR30.D24L-N60.IA1E.7BO

Inductive distance measuring sensors

Article number: 11179051

overview

- 0 ... 24 mm
- current output
- external Teach-in
- connector M12
- -25 ... 75 °C
- IP 67



Technical data

general data

| | |
|-----------------------|--|
| mounting type | non-flush |
| special type | linearized |
| measuring distance Sd | 0 ... 24 mm |
| sensitivity | 0,67 mA/mm |
| resolution | < 0,005 mm (stat.) < 0,01 mm (dynam.) |
| repeat accuracy | < 0,02 mm |
| adjustment | external Teach-in |
| teach | 1-point analog, 2-point analog, factory re-set |
| linearity error | ± 480 µm |
| temperature drift | ± 6 % (Full Scale) |
| Teach-Feedback | LED yellow |

electrical data

| | |
|--|--------------|
| response time (factory characteristic) | < 5 ms |
| voltage supply range +Vs | 8 ... 36 VDC |
| current consumption max. (no load) | 20 mA |

remarks

- external Teach-in
- linear analog output

electrical data

| | |
|-----------------------------|---|
| output circuit | current output |
| output signal | 4 ... 20 mA |
| load resistance | < 50 Ohm/V * Vs - 250 Ohm > 500 Ohm (Vs = 30 ... 36 VDC) |
| short circuit protection | yes |
| reverse polarity protection | yes |

mechanical data

| | |
|------------------------|----------------------|
| type | cylindrical threaded |
| housing material | brass nickel plated |
| dimension | 30 mm |
| housing length | 60 mm |
| connection types | connector M12 |
| tightening torque max. | 100 Nm |

ambient conditions


| | |
|-----------------------|----------------|
| operating temperature | -25 ... +75 °C |
| protection class | IP 67 |

IR30.D24L-N60.IA1E.7BO


Inductive distance measuring sensors

Article number: 11179051

dimension drawing

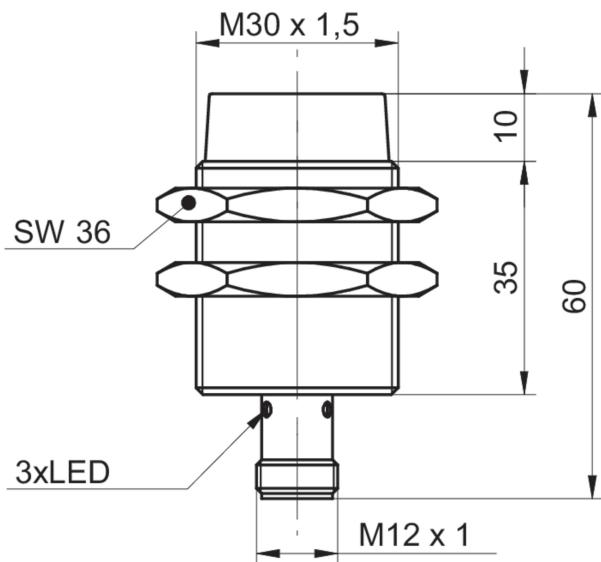

connection diagram

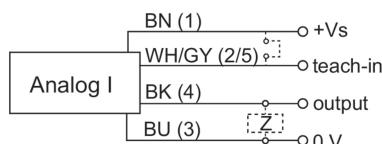

pin assignment

