



Stationary read device OPC120W-F200-R2-Ex

- Explosion protection for use in Zone 1, Zone 2, Zone 21 and Zone 22
- Reads 1-D and 2-D codes at high speeds of up to 6 m/s at 30 readings/s
- High depth of focus
- Code quality index output
- Logo comparison
- Presence detection


Stationary read device for hazardous area



Function

With the OPC120, Pepperl+Fuchs provides the solution to code reading and detection tasks for many industries and applications. Whether reading 1D and 2D codes at high speed, at varying intervals, reflective surfaces or a variety of detection tasks, with the OPC120 you always have the right Vision Sensor at your disposal.

Dimensions

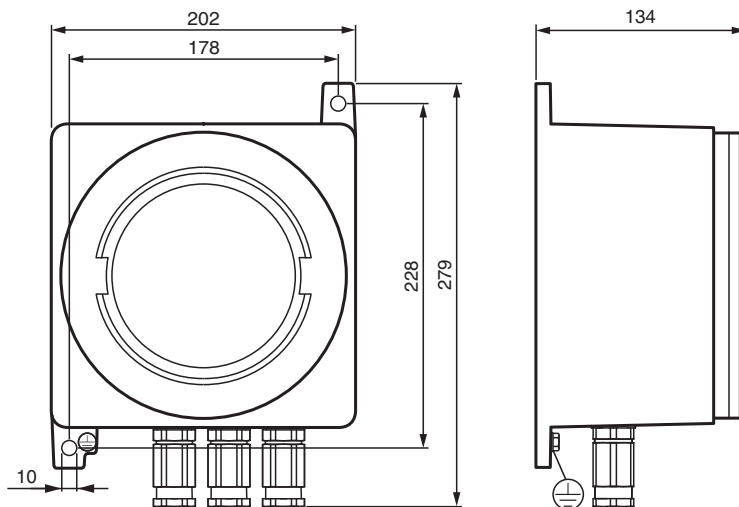

Technical Data

General specifications

Light type	Integrated LED lightning (white)
Symbologies	Data Matrix, Code 39, Code 128, Int 2 of 5, EAN13, Pharmacode
Read distance	60 ... 160 mm Nominal distance: 120 mm
Reading field	Minimum read field: 28 mm x 45 mm Read field at nominal distance: 44 mm x 70 mm Maximum read field: 60 mm x 95 mm
Modul size	Minimum module size: 0.3 mm
Evaluation frequency	up to 30 Hz
Target velocity	triggered max. 6 m/s
Data Matrix	
Symbol size	rectangular up to 144 x 144 modules rectangular up to 16 x 48 modules
Data format	ASCII, C40, Text, X12, Edifact, Base 256 , all according to ISO 646

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Orientation		omnidirectional	
Nominal ratings			
Camera			
Type		CMOS , Global shutter	
Number of pixels		752 x 480 pixels	
Gray scale		256	
Image recording		real-time , Program-controlled or triggered externally	
Functional safety related parameters			
MTTF _d		40.5 a	
Mission Time (T _M)		8 a	
Diagnostic Coverage (DC)		0 %	
Indicators/operating means			
Operation indicator		LED green: Ready for operation	
LED indication		for good/poor reading	
Electrical specifications			
Operating voltage	U _B	24 V DC ± 15% , PELV	
No-load supply current	I ₀	max. 250 mA	
Power consumption	P ₀	6 W	
Interface			
Interface type		serial , RS 232	
Transfer rate		max. 115.2 kBit/s	
Cable length		max. 30 m	
Interface 1			
Interface type		Ethernet	
Protocol		TCP/IP	
Transfer rate		100 MBit/s	
Cable length		max. 30 m	
Input			
Input voltage		to be applied externally 24 V ± 15% PELV	
Number/Type		Trigger	
Input current		approx. 10 mA at 24 V DC	
Switching threshold		low: < 10 V, high: > 15 V	
Cable length		max. 30 m	
Output			
Number/Type		GOOD, BAD, Matchcode	
Switching type		PNP	
Switching voltage		to be applied externally 24 V ± 15 % PELV	
Switching current		100 mA each output	
Cable length		max. 30 m	
Compliance with standards and directives			
Standard conformity			
Noise immunity		EN 61326-1	
Emitted interference		EN 61000-6-4	
Degree of protection		EN 60529	
Laser class		IEC 60825-1:2007	
Approvals and certificates			
IECEX approval		IECEX INE 14.0042X	
ATEX approval		INERIS 14 ATEX 0035X Device type: GUBW1.D.OS-OPC120W-F200-R2	
Marking		Ⓜ II 2 GD Ex db IIC T6 Gb Ex tb IIIC T85°C Db	
Ambient conditions			
Ambient temperature		0 ... 37 °C (32 ... 98.6 °F)	

Release date: 2020-07-16 Date of issue: 2020-07-16 Filename: 70114069_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

 Pepperl+Fuchs Group
 www.pepperl-fuchs.com

 USA: +1 330 486 0001
 fa-info@us.pepperl-fuchs.com

 Germany: +49 621 776 1111
 fa-info@de.pepperl-fuchs.com

 Singapore: +65 6779 9091
 fa-info@sg.pepperl-fuchs.com


 **PEPPERL+FUCHS**

Technical Data

Mechanical specifications

Connection type	Connection terminals, max. conductor cross-section 2.5 mm²
Conductor cross section	0.13 ... 2.5 mm²
Cable gland	3 ... 8.5 mm
Enclosure cover	threaded round cover
Cover fixing	flamepath thread
Cover seal	none, O-ring for IP66/67
Flamepath grease	petroleum jelly
Degree of protection	IP66 (IP66/67 with O-ring)
Material	
Enclosure	aluminum alloy
Glass	thermo-resistant tempered glass
Finish	epoxy coated RAL 7005 (grey)
Mass	approx. 7 kg
Grounding	M6 external grounding points

Connection

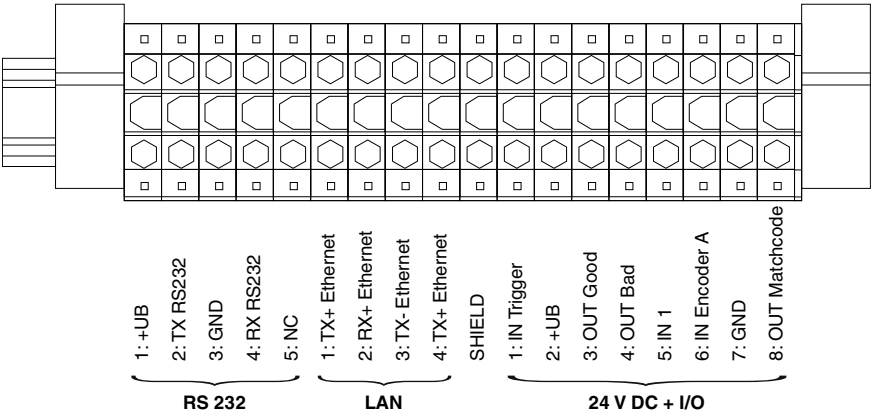

Accessories

	V1SD-G-2M-PUR-ABG	Ethernet bus cable, M12, PUR cable, 4-pin, CAT5e
	V45-G-C5-GN3M-PUR-E1S	Ethernet bus cable male cordset single-ended RJ45 PROFINET-coded, 4-pin, PUR cable green, Cat5e, shielded

Accessories

Other suitable accessories can be found at www.pepperl-fuchs.com

Release date: 2020-07-16 Date of issue: 2020-07-16 Filename: 70114069_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**