



# XSAN01122EX

inductive sensor Namur - M8 - Sn1.5mm -  
7..12VDC - cable 2m

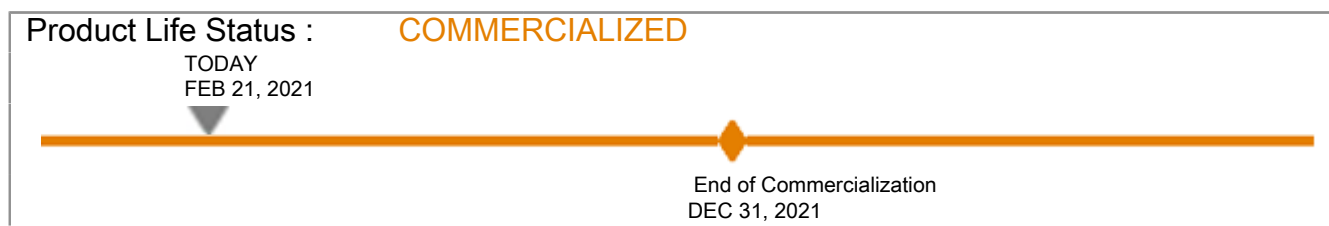

## Main

Range of product	OsiSense XS ATEX D
Series name	Application
Sensor type	Inductive proximity sensor
Device application	ATEX dust
Sensor name	XSA
Sensor design	Cylindrical M8
Size	26.5 mm
Body type	Fixed
Detector flush mounting acceptance	Flush mountable
Material	Stainless steel
Enclosure material	Stainless steel
[Sn] nominal sensing distance	1.5 mm
Type of output signal	Discrete
Wiring technique	2-wire
Discrete output function	1 NC
Output circuit type	DC
Discrete output type	Namur
Electrical connection	Cable
Cable length	2 m
[Us] rated supply voltage	7...12 V DC
Switching capacity in mA	<= 1 mA
IP degree of protection	IP67 conforming to IEC 60529

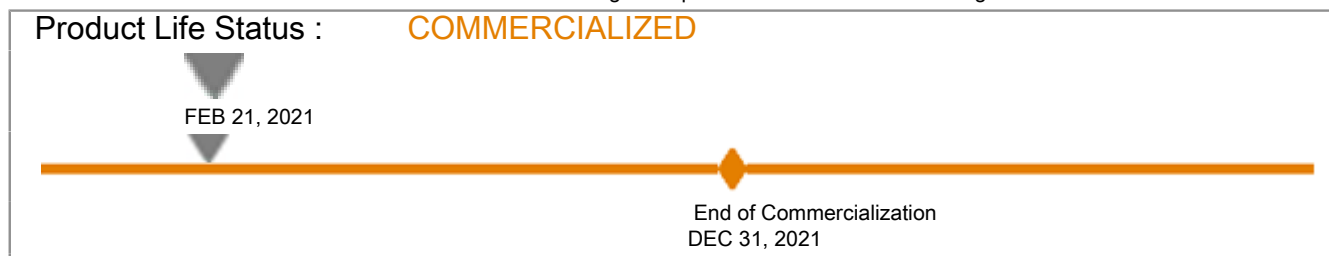

## Complementary

Thread type	M8 x 1
Detection face	Frontal
Front material	PPS
Sensing range	> 0...2.5 mm
Operating zone	0...0.8 mm
Cable composition	2 x 0.11 mm <sup>2</sup>

Wire insulation material	PvR
Maximum residual current	3 mA open state
Switching frequency	<= 1.5 kHz
Marking	II1 D-Ex ia IIIC T85°C Da IP66/67
Threaded length	26.5 mm
Height	8 mm
Length	26.5 mm


## Environment

Environmental characteristic	Hazardous location
Standards	EN/IEC 60079-0 EN/IEC 60079-11
Directives	94/9/EC - ATEX directive
Product certifications	INERIS 04ATEX0016X
Ambient air temperature for operation	-20...60 °C
Dust zone	Zone 20

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	90 g
Package 1 Height	13 cm
Package 1 width	4 cm
Package 1 Length	9.5 cm


## Offer Sustainability

REACH Regulation	<a href="#"> REACH Declaration</a>
EU RoHS Directive	Not applicable, out of EU RoHS legal scope

## Contractual warranty

Warranty	18 months
----------	-----------

## Dimensions

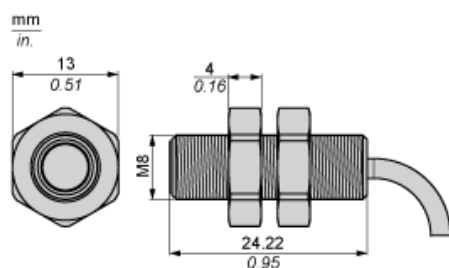

---

### Minimum Mounting Distances

---

Side by side



e (1) 3 mm/0.12 in.

≥

Face to face



e (2) 18 mm/0.71 in.

≥

Facing a metal object



e (3) 4.5 mm/0.18 in.

≥

---

## Wiring Schemes

---

### 2-Wire Non-polarised

NO output




BU : Blue  
BN : Brown

---

Performance Curves

---

Standard Steel Target (mm) : 5x5x1

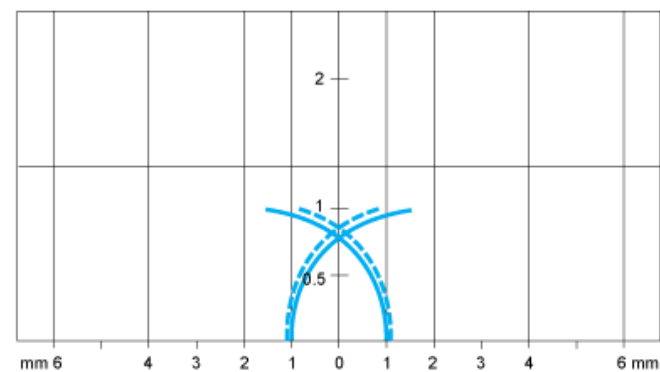

— Pick-up points  
--- Drop-out points (object approaching from the side)  
(y) Sensing distance in mm