





Indicative image

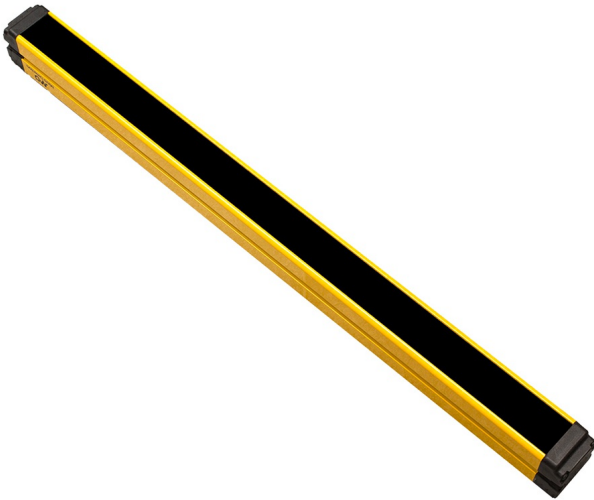

LIGHT CURTAINS TYPE 4

- Type 4 according IEC 61496-1 and IEC 61496-2
- Robust housing(50x60 mm) for applications in presence of heavy shocks and vibrations
- 40 mm resolution for hand protection and 2,3,4 beams for body protection/access control
- Operating distance up to 16 m(standard version) and up to 60 m (LONG RANGE version)
- Integrated functions: MANUAL/AUTOMATIC Restart, EDM and operating distance selectable
- Standard M12 5 poles connector on TX unit and M12 8 poles or M23 9 poles on RX unit

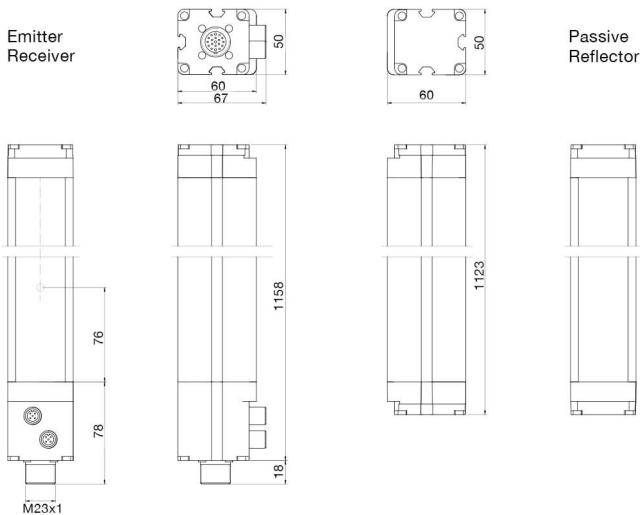

Detection properties

Nominal sensing distance	≤ 6m
Resolution	300mm
controlled height	900mm
number of rays	4
Effective Aperture Angle	≤ ±2,5°

Application

Function Principle	Emitter + Receiver
Available functions	Manual/Automatic Restart, EDM, System Status, Muting 4 Sensors

Safety parameters

Type	4
------	---

SIL	3
SILCL	3
PL	e
PFHd	5,01E-09
Dcavg	98,19%
MTTFd	100
CFF	80%

Outputs

Output type	2 x PNP-NO (OSSD safety output)
Response time	10ms

Electrical data

Operating Voltage	19,2 ... 28,8 Vcc
Load current	500mA
Time delay before availability	15s
Interference to external light	According to IEC 61496-2
Power Consumption - Receiver	6W
Equivalent Resistive Load	$\geq 48 \Omega$
Capacitive Load	$\geq 2 \mu F$
Cabel Length (Power Supply/Output)	100m

Mechanical data

Dimensions	50mm (front)x 60mm
Connections	M23-19 poles (active element) + 2 x M12- 5 poles (muting)
Operating temperature	0°C...+55°C
Storage temperature	-25°C...+70°C
humidity	95% (no condensation)

Test/Approvals

Approvals	CE, cULus, TÜV
EMC compatibility	According to 2014/30/EU Directive
Shocks and vibrations	According to IEC 61496-1
Degree of protection	IP65

Accessories

Supplied Accessories	ST 202, ST 203
----------------------	----------------

Generical Data

Dimensions	50mm (front)x 60mm
Operating Temperature	0°C...+55°C
Humidity	95% (no condensation)

ELECTRICAL DIAGRAMS OF THE CONNECTIONS



For the wiring diagram,
consult the catalogue
or manual.

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail info@datasensing.com

date of printing

29/04/2022 15:51:35