

HRTL 96B

en 04-2014/07 50109888-01



50 ... 6,500mm




- Laser class 2
- Laser scanner with large detection range for universal application (visible red light)
- Light propagation time measurement makes use possible under extreme environmental conditions (brightness, light, interfering contours)
- Extremely simple operation, teachable switching points
- Time lock prevents unintentional changing of the switching points
- Automatic reserve and hysteresis ensure reliable switching behavior
- Switching behavior independent of the direction of movement
- Optimized for positioning tasks and reliable object detection (e.g. compartment occupancy monitoring, shelf positioning)
- Diagnostic function
- Deactivation input



Accessories:

(available separately)


- Mounting systems (BT 96, BT 96.1, UMS 96, BT 450.1-96)
- M12 connectors (KD ...)
- Ready-made cables (K-D ...)

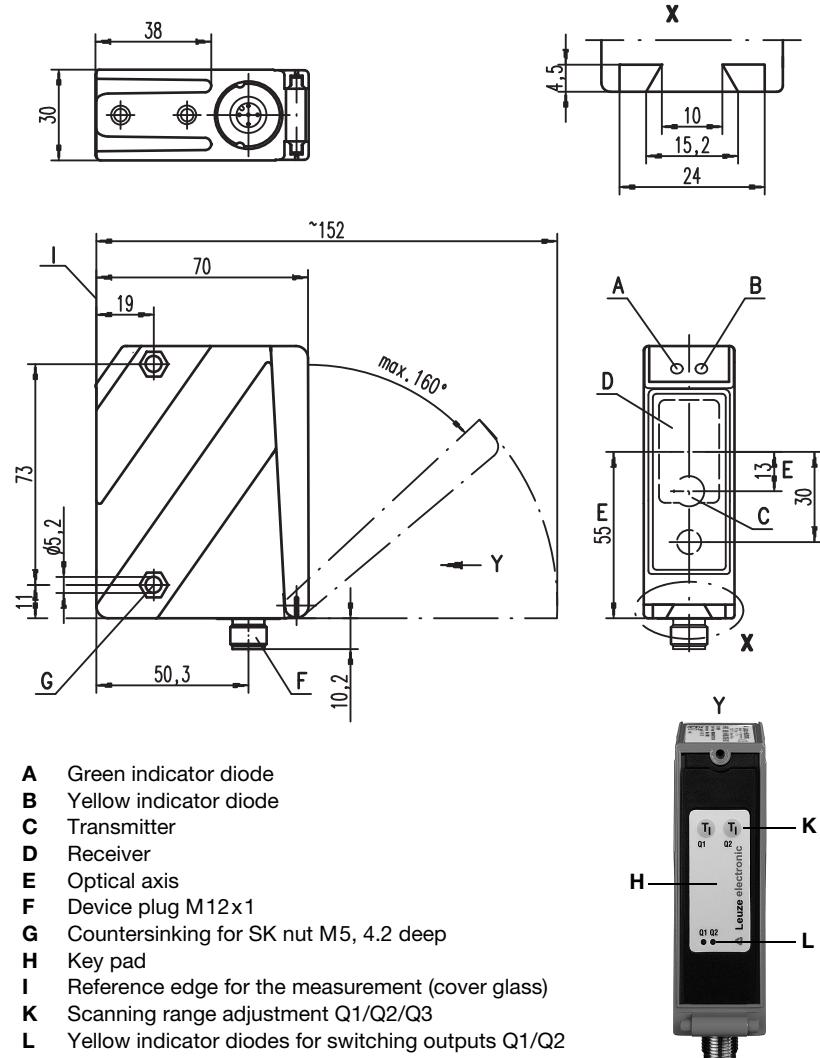Laser light scanner with background suppression
Dimensioned drawing

Electrical connection

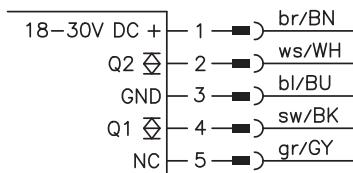
...M/66...

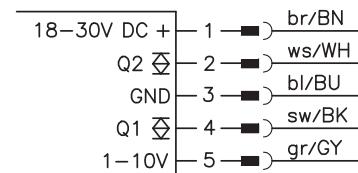


...M/V66...




...M/6...08/09

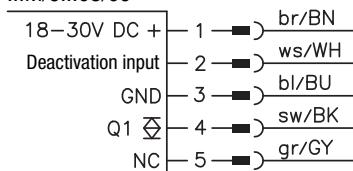

...M/C66...

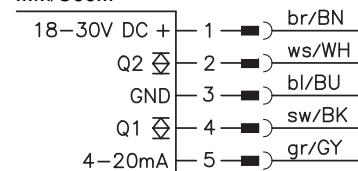

...M/666...

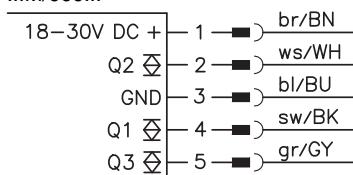

We reserve the right to make changes.

Specifications

Optical data

Typ. scanning range limit (white 90 %) ¹⁾	50 ... 6500 mm
Scanning range ²⁾	100 ... 6000 mm
Adjustment range / teach-in range	150 ... 6000 mm / 6 ... 90 % diffuse reflection
Light source	laser (red light)
Light spot diameter	1m:6mm / 3m:5mm / 5m:4mm / 7m:4mm
Wavelength	658nm

Timing

Switching frequency	100Hz
Response time	5ms
Delay before start-up	≤ 200ms

Electrical data

Operating voltage U_B ³⁾	18 ... 30VDC (incl. residual ripple)
Residual ripple	≤ 15 % of U_B
Open-circuit current	≤ 120mA
Switching output ⁴⁾	<ul style="list-style-type: none"> .../6... 1 push-pull switching output .../66... 2 push-pull switching outputs .../666... 3 push-pull switching outputs <p>see order guide $\geq (U_B - 2V) / \leq 2V$ max. 100mA for Q1/Q2, max. 20mA for Q3</p>
Switching behavior	see order guide
Signal voltage high/low	≥ ($U_B - 2V$) / ≤ 2V
Output current	max. 100mA for Q1/Q2, max. 20mA for Q3
Analog output ⁵⁾	1 ... 10V .../V66... 4 ... 20mA .../C66...

Indicators

Sensor front	ready
Green LED	reflection (Q ₁)
Yellow LED	see table

Mechanical data

Housing	diecast zinc
Optics cover	glass
Weight	380g
Connection type	M12 connector, 5-pin

Environmental data

Ambient temp. (operation/storage)	-40°C ... +50°C / -35°C ... +70°C
Protective circuit ⁶⁾	1, 2, 3, 4
VDE safety class ⁷⁾	II, all-insulated
Degree of protection	IP 67, IP 69K ⁸⁾
Laser class	2 in accordance with DIN EN 60825-1:2008-05
Standards applied	IEC 60947-5-2
Certifications	UL 508, C22.2 No.14-13 ^{3) 9) 10)}

Options

Deactivation input


Transmitter inactive/active	≥ 8V / ≤ 2V ¹¹⁾
Activation/disable delay	≥ 20ms
Input resistance	10KΩ ± 10 %

- 1) Typ. scanning range limit: max. attainable range without performance reserve
- 2) Scanning range: recommended range with performance reserve
- 3) For UL applications: for use in class 2 circuits according to NEC only
- 4) The push-pull switching outputs must not be connected in parallel
- 5) Configurable at the factory, measurement ranges of 100 ... 15000 mm possible
- 6) 1=transient protection, 2=polarity reversal protection, 3=short circuit protection for all outputs, 4=interference blanking
- 7) Rating voltage 250VAC
- 8) IP 69K test in accordance with DIN 40050 part 9 simulated, high pressure cleaning conditions without the use of additives, acids and bases are not part of the test
- 9) These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/CYJV7 or PVVA/PVVA7)
- 10) CAUTION - Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.
- 11) Upon deactivation of the laser, output Q1 becomes inactive.
- 12) Inverted for dark switching

Tables

Switching points	no reflection	object detected
Yellow LED Q 1	off	on
Yellow LED Q 2	off	on

Diagrams

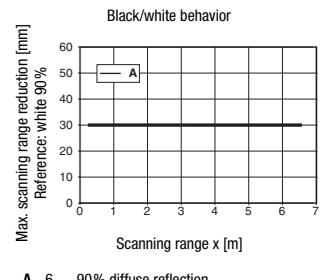

Remarks

- Setting switching points Q1/Q2: Align sensor with object, press respective teach button for at least 2s, then release the button. Object is detected if the corresponding Q1/Q2 indicator illuminates.¹²⁾
- Setting switching point Q3: Press teach button 1 for approx. 12s, release after LED flashes rapidly, switching point is taught. No LED provided for Q3.
- Reserve: For the reliable detection of objects with low reflectance, a reserve is automatically added during the teach event. This is constant over the entire teach range.
Object is detected:
distance to sensor ≤ teach point + reserve
- Hysteresis: To ensure continuous object detection in the switching point, the sensor has a switch-off hysteresis.
Object is no longer detected if:
distance to sensor > teach point + reserve + hysteresis.
- Factory setting:
reserve: approx. 50 mm
hysteresis: approx. 50 mm
- Object detection:
resolution < 5 mm, standard deviation ±10 mm at ±3 Sigma
- Edge detection/shelf positioning:
repeatability < 1 mm
- With the set scanning range, a tolerance of the upper scanning range limit is possible depending on the reflection properties of the material surface.
- Scanning range/reflectivity:

Object/ diffuse reflection	
6 ... 90 %	0.15 ... 6m (standard)

Operate in accordance with intended use.

- ☒ This product is not a safety sensor and is not intended as personnel protection.
- ☒ The product may only be put into operation by competent persons.
- ☒ Only use the product in accordance with the intended use.

HRTL 96B

Laser light scanner with background suppression

Order guide

Selection table

Selection table		Order code
Equipment	↓	
Housing	metal	HRTL 96BM/66.01S-S12 Part no. 50108889
Light source	red light laser	HRTL 96BM/V66.02S-S12 Part no. 50110728
Connection	M12 connector, 5-pin	HRTL 96BM/V66.01S-S12 Part no. 50110952
Outputs	2 switching points	HRTL 96BM/6.09S-S12 Part no. 50110990
	1 x push-pull, PNP light switching/NPN dark switching	HRTL 96BM/6.09.01S-S12 Part no. 50111122
	1 x push-pull, PNP light switching/NPN dark switching, small hysteresis (20 mm)	HRTL 96B M/C66.01S-S12 Part no. 50111208
	2 x push-pull, PNP light switching/NPN dark switching	HRTL 96B M/V66.03S-S12 Part no. 50111486
	2 x push-pull, PNP dark switching/NPN light switching	HRTL 96B M/6.902S-S12 Part no. 50111846
	2 x push-pull, Q1: PNP dark switching/NPN light switching, Q2: PNP light switching/NPN dark switching	HRTL 96B M/686.01S-S12 Part no. 50112804
	3 x push-pull, PNP light switching/NPN dark switching	HRTL 96B M/C66.02S-S12 Part no. 50113595
	teachable switching points	HRTL 96B M/66.02S-S12 Part no. 50113800
	analog / voltage (range = 100 ... 1500 mm)	HRTL 96B M/C66.03S-S12 Part no. 50114306
	analog / voltage (range = 100 ... 6000 mm)	HRTL 96B M/66.07S-S12 Part no. 50121404
	analog / voltage (range = 100 ... 15000 mm)	HRTL 96B M/C66.005S-S12 Part no. 50122124
Input	deactivation	
	Parameterization	application-specific

Laser safety notices



ATTENTION, LASER RADIATION – LASER CLASS 2

Never look directly into the beam!

The device fulfills the EN 60825-1:2008-05 (IEC 60825-1:2007) safety regulations for a product in **laser class 2** as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to "Laser Notice No. 50" from June 24th, 2007.

↳ Never look directly into the laser beam or in the direction of reflecting laser beams!

If you look into the beam path over a longer time period, there is a risk of injury to the retina.

↳ Do not point the laser beam of the device at persons!

↳ Intercept the laser beam with an opaque, non-reflective object if the laser beam is accidentally directed towards a person.

↳ When mounting and aligning the device, avoid reflections of the laser beam off reflective surfaces!

↳ CAUTION! Use of controls or adjustments or performance of procedures other than specified herein may result in hazardous light exposure.

The use of optical instruments or devices (e.g., magnifying glasses, binoculars) with the product will increase eye hazard.

↳ Adhere to the applicable legal and local regulations regarding protection from laser beams acc. to EN 60825 (IEC 60825) in its latest version.

↳ The device must not be tampered with and must not be changed in any way.

There are no user-serviceable parts inside the device.

Repairs must only be performed by Leuze electronic GmbH + Co. KG.

NOTICE

Affix laser information and warning signs!

Laser information and warning signs are affixed to the device (see ①). In addition, self-adhesive laser information and warning signs (stick-on labels) are supplied in several languages (see ②).


↳ Affix the laser information sheet with the language appropriate for the place of use to the device.

When using the device in the US, use the stick-on label with the "Complies with 21 CFR 1040.10" notice.

↳ Affix the laser information and warning signs near the device if no signs are attached to the device (e.g. because the device is too small) or if the attached laser information and warning signs are concealed due to the installation position.

Affix the laser information and warning signs so that they are legible without exposing the reader to the laser radiation of the device or other optical radiation.

①

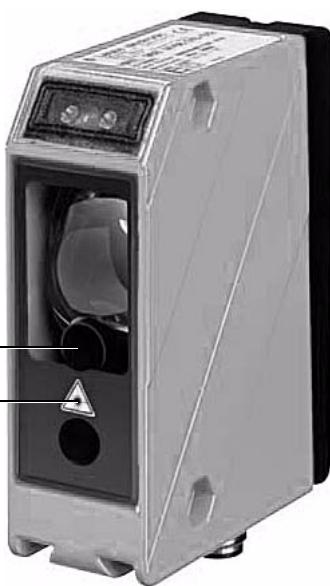

A Laser exit opening
B Laser warning sign

②

50108905-03

**LASERSTRÄHLUNG
NICHT IN DEN STRAHL BLICKEN**
Max. Leistung (peak): 248 mW
Impulsdauer: 6.5 ns
Wellenlänge: 658 nm
LASER KLASSE 2
DIN EN 60825-1:2008-05

**LASER RADIATION
DO NOT STARE INTO BEAM**
Maximum Output (peak): 248 mW
Pulse duration: 6.5 ns
Wavelength: 658 nm
CLASS 2 LASER PRODUCT
EN 60825-1:2007

**RADIACIÓN LASER
NO MIRAR FIRMAMENTE AL HAZ**
Potencia máx. (peak): 248 mW
Duración del impulso: 6.5 ns
Longitud de onda: 658 nm
PRODUCTO LASER DE CLASE 2
EN 60825-1:2007

**LASER RADIATION
DO NOT STARE INTO BEAM**
Maximum Output (peak): 248 mW
Pulse duration: 6.5 ns
Wavelength: 658 nm
CLASS 2 LASER PRODUCT
EN 60825-1:2007
Complies with 21 CFR 1040.10

**RADIATION LASER
NON FIXERRE LE FAISCEAU**
Puissance max. (crête): 248 mW
Durée d'impulsion: 6.5 ns
Longueur d'onde: 658 nm
APPAREIL A LASER DE CLASSE 2
EN 60825-1:2007

**RAYONNEMENT LASER
NE PAS REGARDER DANS LE FAISCEAU**
Puissance max. (crête): 248 mW
Durée d'impulsion: 6.5 ns
Longueur d'onde: 658 nm
APPAREIL A LASER DE CLASSE 2
EN 60825-1:2007

**RADIACIÓN LASER
NÃO OLHAR FIXAMENTE O FEIXE**
Potencia máx. (peak): 248 mW
Período de pulso: 6.5 ns
Comprimento de onda: 658 nm
EQUIPAMENTO LASER CLASSE 2
EN 60825-1:2007

**激光辐射
不要直视光束**
最大输出 (峰值): 248 mW
脉冲持续时间: 6.5 ns
波长: 658 nm
2 级激光产品
GB/T24741-2012

