


Inductive analog sensor


NBB5-18GM60-I



- Inductive analog
- Output 4 mA ... 20 mA
- Flush mounting

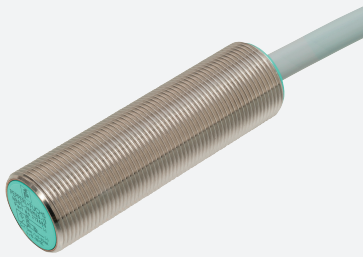

Dimensions

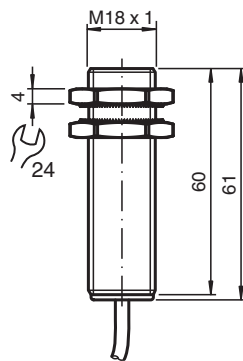

Technical Data

General specifications		
Output type		Analog current output
Installation		flush
Output polarity		DC
Measurement range		1 ... 5 mm
Output type		3-wire
Nominal ratings		
Operating voltage	U _B	10 ... 30 V DC typ. 20 V DC
Reverse polarity protection		yes
Repeat accuracy		0 ... 80 μm
No-load supply current	I ₀	≤ 12 mA
Analog output		
Output type		4 ... 20 mA
Slope of output characteristic		4 mA / mm
Linearity error		≤ ± 5 % of full-scale value
Load resistor		≤ 1000 Ω typ. 500 Ω

Release date: 2020-03-24 Date of issue: 2020-03-30 Filename: 303098_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data


Rate of current rise		
4 ... 20 mA		max. 30.9 A/s
20 ... 4 mA		max. 11.1 A/s
Recovery time		1 ... 10 ms , typ. 5 ms
Adjustment tolerance zero point		$\leq \pm 5$ % of full-scale value
Temperature drift		$\leq \pm 0.15$ %/K of full-scale value
Residual ripple		± 125 μ A
Compliance with standards and directives		
Standard conformity		
Standards		EN 60947-5-2:2007 IEC 60947-5-2:2007 EN 60947-5-7:2003 IEC 60947-5-7:2003
Approvals and certificates		
UL approval		cULus Listed, Class 2 Power Source
CCC approval		CCC approval / marking not required for products rated ≤ 36 V
Ambient conditions		
Ambient temperature		-25 ... 70 °C (-13 ... 158 °F)
Mechanical specifications		
Connection type		cablE PVC , 2 m
Core cross-section		0.5 mm ²
Housing material		brass, nickel-plated
Sensing face		PBT
Degree of protection		IP67

Connection




Characteristic Curve

Output characteristics

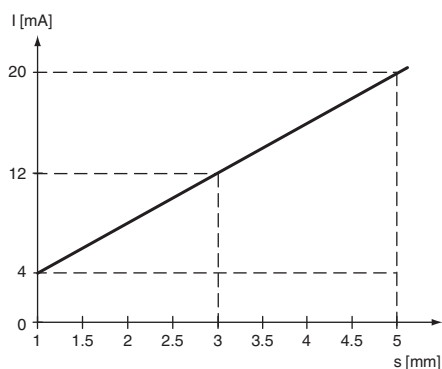

Release date: 2020-03-24 Date of issue: 2020-03-30 Filename: 303098_eng.pdf

Reduction factor

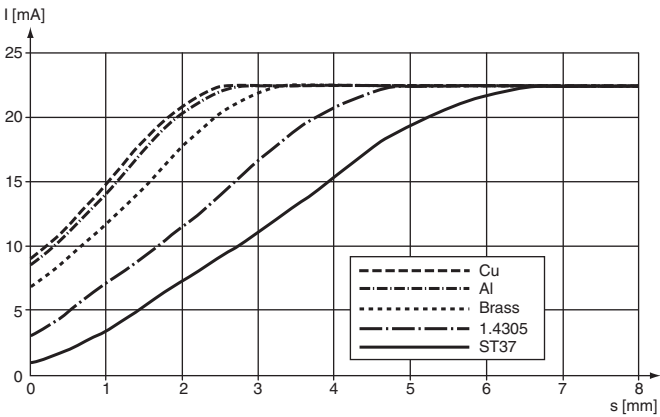

Accessories



BF 18

Mounting flange, 18 mm