


CD12M/AC-050C5

CD



Indicative image

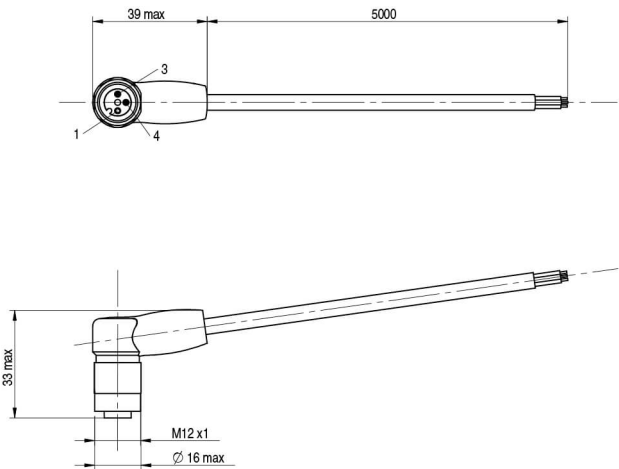

Electrical data

Nominal current	4 A
Led	No
Wires	2+PE
Rated impulse voltage	2 kV
Nominal voltage	Max. 250 V ac/dc

Mechanical data

Connections	With open ended wires
Tightening torque	0,6 Nm
Operating temperature	-10°C ...+80°C (flexible installation)-25°C...+80°C (fixed installation)
1	5
Head type	90°
Plug	1/2" - 20UNF
Outer diameter	Ø 4,6 mm ± 5%
Jacket material	TPU
Wire isolation	PVC
Conductors section	0,50 mm2
Model	Femmina

Test/Approvals

Degree of protection

IP67

Generical Data

Operating Temperature

-10°C ...+80°C (flexible installation)-25°C...+80°C (fixed installation)

Mechanical Protection

IP67

ELECTRICAL DIAGRAMS OF THE CONNECTIONS

YE-GN/1

BN/2

BU/3

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail info@datasensing.com

date of printing

29/04/2022 13:03:41