

overview

- Extended functional reserve capacities for maximum reliability
- Baumer PinPoint LED: Small, homogeneous light spot with sharp edges
- Long-term stable detection of transparent objects thanks to compensation of environmental influences
- Manipulation-proof, simple teach-in via qTeach or line teach
- IO-Link for extended parameterization options and additional diagnostic data
- Quick mounting by means of M3 threaded bushes made of stainless steel



Technical data

general data		electrical data	
type	retro-reflective sensor	output function	light / dark operate
version	transparency object detection single lens optics	output circuit	push-pull
light source	pulsed PinPoint LED	output current	< 50 mA
actual range Sb	0,8 m	short circuit protection	yes
nominal range Sn	1 m	reverse polarity protection	yes
polarization filter	yes	communication interface	
minimal signal attenuation	5 %	baud rate	230,4 kBaud (COM 3)
alignment / soiled lens indicator	flashing output indicator	adjustable parameters	switching point time filters LED status indicators output logic counter deactivate the sensor element Find Me function Teach-in mode
output indicator	LED yellow	IO-Link port type	Class A
power on indication	LED green	process data length	32 Bit
sensitivity adjustment	Teach-in and IO-Link	process data structure	Bit 0 = SSC1 (presence) Bit 2 = quality Bit 3 = alarm Bit 5 = SSC4 (counter) Bit 16-31 = 16 Bit measurement
wave length	644 nm	interface	IO-Link V1.1
suppression of reciprocal influence	yes	additional data	signal strength excess gain operating cycles device temperature
electrical data			
response time / release time	< 0,25 ms		
jitter	< 0,06 ms		
voltage supply range +Vs	10 ... 30 VDC		
current consumption max. (no load)	40 mA (@ 10 VDC)		
current consumption typ.	16 mA (@ 24 VDC)		
voltage drop Vd	< 2 VDC		

Technical data

communication interface

cycle time $\geq 0,6$ ms

mechanical data

width / diameter 8 mm

height / length 25,1 mm

depth 15,8 mm

type rectangular

mechanical mounting threaded sleeves M3 (stainless steel)

mechanical data

housing material plastic (ASA, PMMA)

front (optics) PMMA

connection types flylead connector M8 4 pin, L=200 mm


cable characteristics PVC / PVC 4 x 0,08 mm²

ambient conditions


operating temperature -25 ... +50 °C

protection class IP 67


dimension drawing

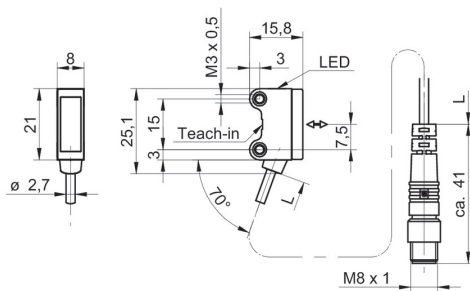


connection diagram

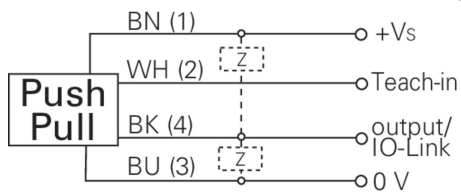

pin assignment



beam characteristic (typically)

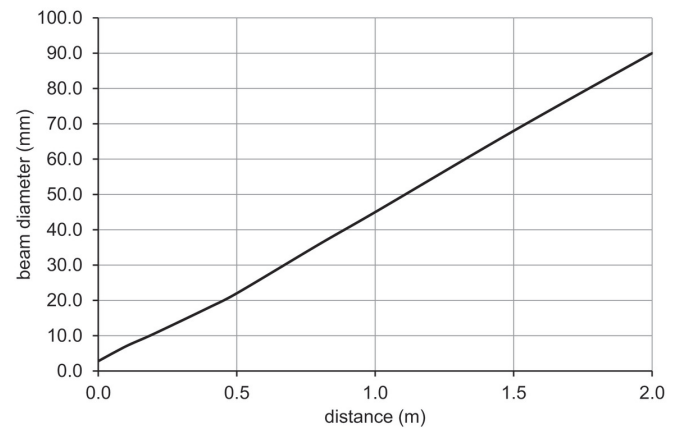

excess gain curve

