


Installation instructions
Electronic pressure sensor
for mobile applications

UK

PU87xx

02 / 2017

80261604 / 00

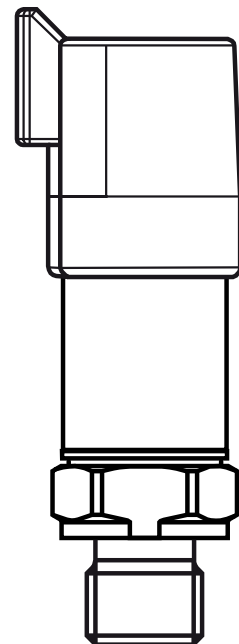

Contents

1 Preliminary note.....	2
2 Safety instructions	2
3 Functions and features	3
3.1 Application	3
3.2 Use in hydraulic systems of mobile machines	4
4 Function	5
5 Mounting	5
6 Electrical connection.....	6
7 Technical data and scale drawing.....	6

1 Preliminary note

Symbols used

- Instructions
- Cross-reference
-  Important note
Non-compliance may result in malfunction or interference.
-  Information
Supplementary note.

2 Safety instructions

- Read this document before setting up the product and keep it during the entire service life.
- The product must be suitable for the corresponding applications and environmental conditions without any restrictions.
- Only use the product for its intended purpose (→ 3 Functions and features).
- If the operating instructions or the technical data are not adhered to, personal injury and/or damage to property may occur.
- The manufacturer assumes no liability or warranty for any consequences caused by tampering with the product or incorrect use by the operator.

- Installation, electrical connection, set-up, operation and maintenance of the unit must be carried out by qualified personnel authorised by the machine operator.
- Protect units and cables against damage.

3 Functions and features

The pressure sensor detects the system pressure and converts it into an analogue output signal.

3.1 Application

- Type of pressure: relative pressure

UK

Order number	Final value of the measuring range (nominal pressure)	Static pressure rating (max. permissible pressure)	Bursting pressure
	bar	bar	bar
PU8760	0...600	1500	2500
PU8700	0...400	1000	1700
PU8701	0...250	625	1200
PU8712	0...160	400	1100
PU8702	0...100	250	1000
PU8743	0...40	100	800
PU8703	0...25	65	600
PU8704	0...10	25	300



Avoid static and dynamic overpressure exceeding the indicated pressure rating by taking appropriate measures. The indicated bursting pressure must not be exceeded. Even if the bursting pressure is exceeded only for a short time, the unit may be destroyed. ATTENTION: risk of injury!



For units with a final value of the measuring range of 600 bar, the limits of the pressure cycles over the lifetime apply (→ 7).



Surge resistance

In order to achieve CE conformity, it must be ensured that the cable length used is restricted to max. 30 m.



Pressure Equipment Directive (PED):

The units with a final value of the measuring range of 10...400 bar comply with the Pressure Equipment Directive. They are designed for group 2 fluids and are manufactured in accordance with sound engineering practice.

Use of media from group 1 fluids on request.



Pressure Equipment Directive (PED):

The units with a final value of the measuring range of 600 bar comply with the Pressure Equipment Directive. They are designed for group 2 fluids and manufactured and tested according to module A.

Use of media from group 1 fluids on request.



The units are vacuum resistant.

3.2 Use in hydraulic systems of mobile machines

Restrictor in the process connection:

In hydraulic systems of mobile machines, highly dynamic effects such as pressure peaks, cavitation etc. may arise depending on the operating conditions. To reduce these effects on the measuring element of the sensor, a diaphragm attachment is integrated into the process connection.


The specific thread pitch of the diaphragm attachment has the effect of a hole of 0.3 mm.



Note:

High viscosity may reduce the response time by some milliseconds. Heavy soiling may affect the functionality.

4 Function

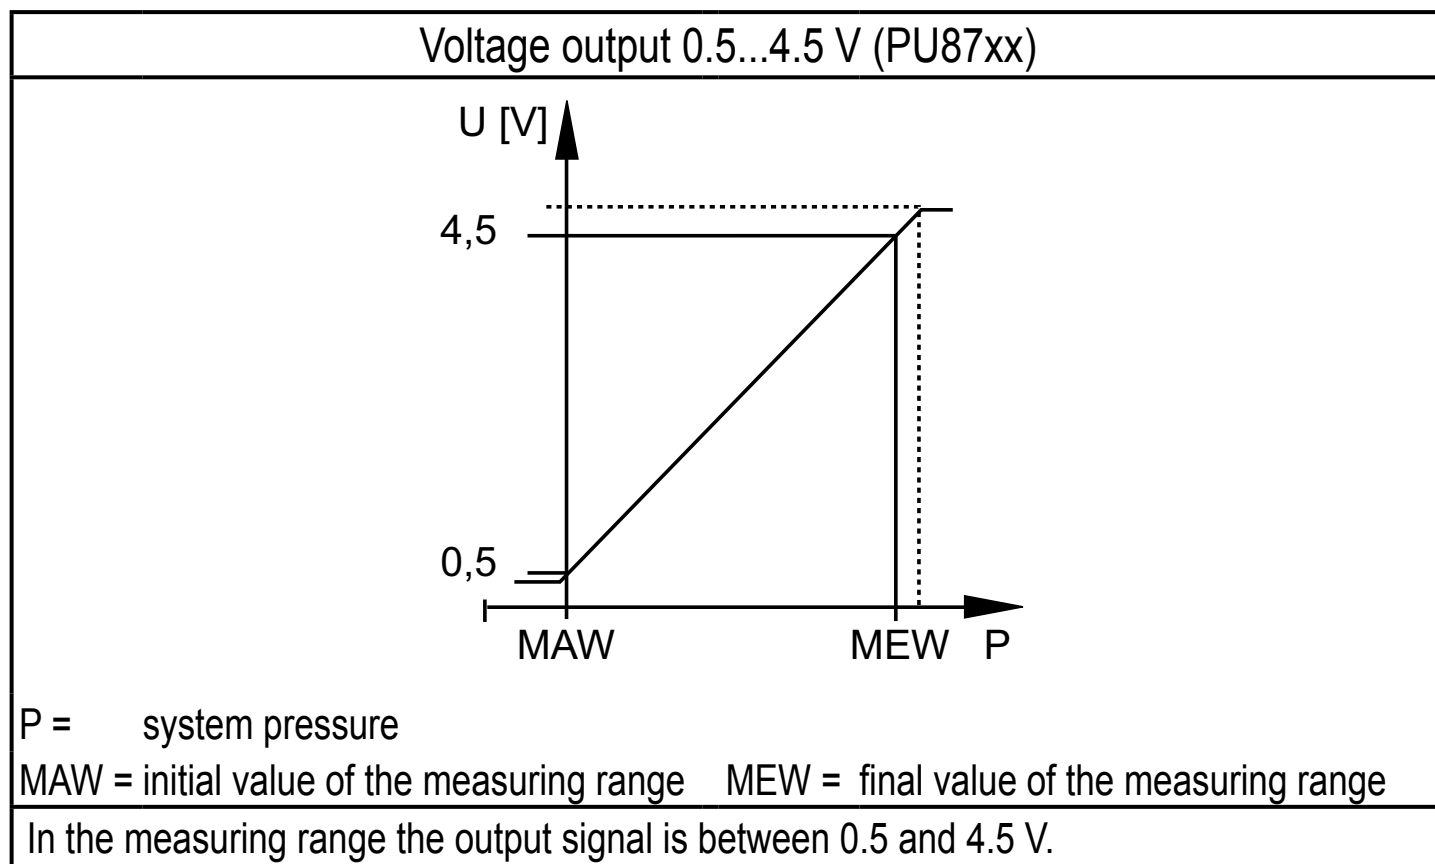

5 Mounting



Before installing and removing the unit:

Make sure that no pressure is applied to the system!

- Insert the unit in a G $\frac{1}{4}$ process connection.
- Tighten firmly. Recommended tightening torque:

Final value of the measuring range in bar	Tightening torque in Nm
10...400	25...35
600	30...50
Depends on lubrication, seal and pressure load.	

6 Electrical connection



The unit must be connected by a qualified electrician.
The national and international regulations for the installation of electrical equipment must be adhered to.
Voltage supply to EN 50178, SELV, PELV.

- ▶ Disconnect power.
- ▶ Connect the unit as follows:

PU87xx (0.5...4.5 V analogue)

Deutsch DT04 3P	
OUT: analogue output 0.5...4.5 V	

7 Technical data and scale drawing



The indication of the following technical data is required by the Pressure Equipment Directive (PED) for units with a final value of the measuring range of 600 bar.

PU8760	
Operating voltage [V]	8...32 DC
Analogue output	0.5...4.5 V
Medium temperature [°C]	-40...125
Ambient temperature [°C]	-40...100
Storage temperature [°C]	-40...100
Pressure cycles (min.) over lifetime.....	60 million for 1.2 x nominal pressure
Shock resistance [g]	500 (DIN EN 60068-2-27, 1 ms)
Vibration resistance [g]	20 (DIN EN 60068-2-6, 10...2000 Hz)

Further technical data and scale drawing at www.ifm.com.

More information at www.ifm.com