


CD12M/0X-050A5

CD



Indicative image

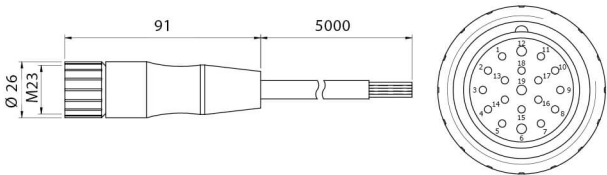

Electrical data

Nominal current	2 A
Led	no
Wires	8
Rated impulse voltage	1,5 kV
Nominal voltage	Max. 30 V ac/dc

Mechanical data

Connections	With open ended wires
Tightening torque	0,6 Nm
Operating temperature	-25°C...+80°C (flexible installation)-25°C...+80°C (fixed installation)
1	5
Head type	Axial
Plug	M12
Outer diameter	Ø 6,4 mm ± 0,2 mm
Jacket material	TPU
Wire isolation	PP
Conductors section	0,34 mm2 (42 x 0,10 mm2)
Model	Femmina

Test/Approvals

Degree of protection	IP67
----------------------	------

Generical Data

Operating Temperature

-25°C...+80°C (flexible installation)-25°C...+80°C (fixed installation)

Mechanical Protection

IP67

ELECTRICAL DIAGRAMS OF THE CONNECTIONS

BN / 1

WH / 2

BU / 3

BK / 4

GY / 5

PK / 6

VT / 7

OR / 8

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail info@datasensing.com

date of printing

29/04/2022 12:57:30