



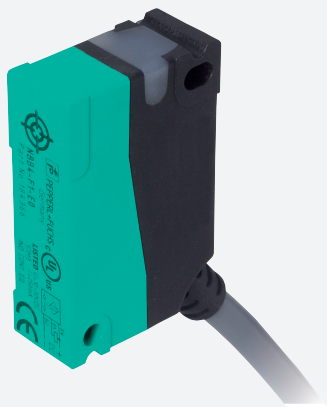


## Inductive sensor NBB4-F1-E3-6M

- 4 mm flush
- 3-wire DC



### Dimensions

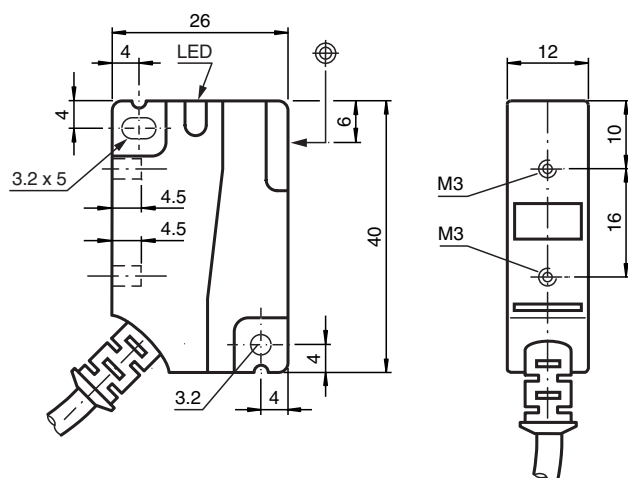

### Technical Data

#### General specifications

|                            |       |                      |
|----------------------------|-------|----------------------|
| Switching function         |       | Normally closed (NC) |
| Output type                |       | PNP                  |
| Rated operating distance   | $s_n$ | 4 mm                 |
| Installation               |       | flush                |
| Output polarity            |       | DC                   |
| Assured operating distance | $s_a$ | 0 ... 3.24 mm        |
| Reduction factor $r_{Al}$  |       | 0.4                  |
| Reduction factor $r_{Cu}$  |       | 0.45                 |
| Reduction factor $r_{304}$ |       | 0.8                  |

Release date: 2020-03-23 Date of issue: 2020-03-30 Filename: 194908\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**PEPPERL+FUCHS**

## Technical Data

|                                                 |                  |                                                                            |
|-------------------------------------------------|------------------|----------------------------------------------------------------------------|
| Reduction factor $r_{\text{Brass}}$             |                  | 0.55                                                                       |
| <b>Nominal ratings</b>                          |                  |                                                                            |
| Operating voltage                               | $U_B$            | 10 ... 30 V                                                                |
| Switching frequency                             | $f$              | 0 ... 1400 Hz                                                              |
| Hysteresis                                      | $H$              | typ. 5%                                                                    |
| Reverse polarity protection                     |                  | reverse polarity protected                                                 |
| Short-circuit protection                        |                  | pulsing                                                                    |
| Voltage drop                                    | $U_d$            | $\leq 2.5 \text{ V}$                                                       |
| Rated insulation voltage                        | $U_{\text{BIS}}$ | 60 V                                                                       |
| Operating current                               | $I_L$            | 0 ... 250 mA                                                               |
| Off-state current                               | $I_r$            | 0 ... 0.01 mA typ. 0.1 $\mu\text{A}$ at 25 °C                              |
| No-load supply current                          | $I_0$            | $\leq 15 \text{ mA}$                                                       |
| Switching state indicator                       |                  | LED, yellow                                                                |
| <b>Functional safety related parameters</b>     |                  |                                                                            |
| MTTF <sub>d</sub>                               |                  | 1640 a                                                                     |
| Mission Time ( $T_M$ )                          |                  | 20 a                                                                       |
| Diagnostic Coverage (DC)                        |                  | 0 %                                                                        |
| <b>Compliance with standards and directives</b> |                  |                                                                            |
| Standard conformity                             |                  |                                                                            |
| Standards                                       |                  | EN 60947-5-2:2007<br>IEC 60947-5-2:2007                                    |
| <b>Approvals and certificates</b>               |                  |                                                                            |
| Protection class                                |                  | II                                                                         |
| Rated insulation voltage                        | $U_i$            | 60 V                                                                       |
| Rated impulse withstand voltage                 | $U_{\text{imp}}$ | 800 V                                                                      |
| UL approval                                     |                  | cULus Listed, General Purpose                                              |
| CSA approval                                    |                  | cCSAus Listed, General Purpose                                             |
| CCC approval                                    |                  | CCC approval / marking not required for products rated $\leq 36 \text{ V}$ |
| <b>Ambient conditions</b>                       |                  |                                                                            |
| Ambient temperature                             |                  | -25 ... 70 °C (-13 ... 158 °F)                                             |
| <b>Mechanical specifications</b>                |                  |                                                                            |
| Connection type                                 |                  | cablE PVC , 6 m                                                            |
| Core cross-section                              |                  | 0.5 mm <sup>2</sup>                                                        |
| Housing material                                |                  | PA                                                                         |
| Sensing face                                    |                  | PA                                                                         |
| Degree of protection                            |                  | IP67                                                                       |
| Tightening torque, fastening screws             |                  | Threading M3 max: 1.1 Nm                                                   |

## Connection Assignment

