



Main

Range of product	Telemecanique Safety light curtains XUSL
Product or component type	Safety thru-beam pair photo-electric sensors
Device short name	XU2S
Output type	1 safety outputs OSSD PNP
[Sn] nominal sensing distance	8 m

Complementary

Detection system	Transmitter-receiver system
[Us] rated supply voltage	12...24 V DC 10...30 V reverse polarity protection
Current consumption	<= 35 mA no-load
Maximum voltage drop	<1.5 V (closed)
Switching capacity in mA	<= 100 mA (overload and short-circuit protection)
Switching frequency	500 Hz maximum
Electrical connection	Pre-cabled
Line of sight type	90° to case axis
Maximum delay response	1 ms
Maximum delay recovery	1 ms
Cable outer diameter	5 mm
Cable length	5 m
Cable composition	3 x 0.34 mm ² for transmitter 4 x 0.34 mm ² for receiver
Tightening torque	24 N.m fixing nut
Function available	Built-in muting function Light or dark programmable switching
Marking	CE
Material	Nickel plated brass: case PMMA (polymethyl methacrylate): lenses
Net weight	0.485 kg

Environment

Standards	EN/IEC 60825-1 EN/IEC 61496-2 EN/IEC 61496-1
Safety level	Can reach PL = c associated with module XPSCM correctly wired conforming to EN/ISO 13849-1 Can reach category 2 associated with module XPSCM correctly wired conforming to EN/ISO 13849-1 Type 2 conforming to IEC 61496-1-2
Ambient air temperature for operation	-25...55 °C
Safety reliability data	PFH = 5.5E-7 1/h conforming to IEC 61508 with muting function PFH = 4.6E-7 1/h conforming to IEC 61508
Ambient air temperature for storage	-40...70 °C
IP degree of protection	IP67 conforming to EN/IEC 60529

Shock resistance	30 gn 3 axes : 3 times conforming to EN/IEC 60068-2-27
Vibration resistance	7 gn (f= 10...55 Hz) conforming to EN/IEC 60068-2-6

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	433 g
Package 1 Height	6.6 cm
Package 1 width	9.4 cm
Package 1 Length	13 cm
Unit Type of Package 2	S02
Number of Units in Package 2	14
Package 2 Weight	6.517 kg
Package 2 Height	15 cm
Package 2 width	30 cm
Package 2 Length	40 cm

Offer Sustainability


Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	 Yes
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	 End of Life Information

Contractual warranty

Warranty	18 months
----------	-----------


Dimensions

Receiver

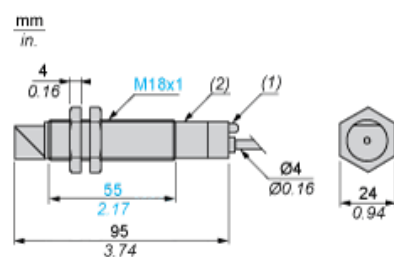

- (1) LED
- (2) Potentiometer


Transmitter

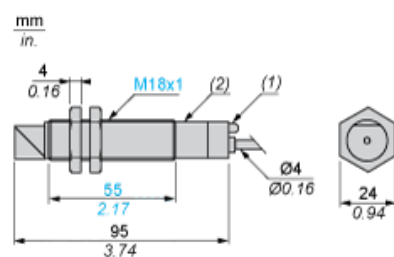

- (1) LED
- (2) Potentiometer

Wiring Schemes (3-wire DC)


Transmitter



BU : Blue
BN : Brown
VI : Violet
(1) Test


Beam Break Test

Beam Made



BU : Blue
BN : Brown
VI : Violet


Beam Broken



BU : Blue
BN : Brown
VI : Violet


Receiver

Light switching (no object present). PNP output



BN : Brown
BU : Blue
BK : Black
OG : Orange

Dark switching (no object present). PNP output



BN : Brown
BU : Blue
BK : Black
OG : Orange

Connecting to a Safety Module

Discover
XU2S18PP340D by

- Characteristics
- Dimensions Drawings
- Connections and Schema
- Performance Curves
- **Download & Documents**

Download & Documents 1 to 8 of 8

CAD

Preventa - Photo-electric sensors - Thru beam, pair - Ref. XU2S18PP340D	SILENT 2015-07-21	(Se ▼)
Preventa - Photo-electric sensors - Thru beam, pair - Ref. XU2S18PP340D	SILENT 2009-10-23	(Se ▼)

Instruction sheet

XU2S18... Cylindrical photo-electric sensor design 18	English 2015-07-21	pdf ▼
---	--------------------	-------

Product environmental

XUB... XU1... to XU9... Photoelectric Sensor, Product Environmental profile	English 2012-03-19	pdf ▼
---	--------------------	-------

End of life manual

XUB... and XU1... to XU9... Photoelectric Sensors, Product End-of-life Instructions	English 2012-02-20	pdf ▼
---	--------------------	-------

System user guide

Connecting to a monitoring device XU2S	English 2015-06-08	pdf ▼
--	--------------------	-------

Catalog

Safety light curtains Preventa XUSL	English 2015-05-18	pdf ▼
-------------------------------------	--------------------	-------

Image of product

Security light curtain XU2S	SILENT 2015-07-21	(Se ▼)
-----------------------------	-------------------	--------

①

②

1 : Click on Download & Documents


2 : Click on System user guide

To have all connection schematics concerning our safety module, select "download and document" and download the file "Connecting to a monitoring device XU2S"


Telemecanique
Sensors

5

Infrared Detection Curve



Verification of Correct Operation



- (1) LED off
- (2) LED on
- (3) Red LED
- (4) Signal level
- (5) Optimum alignment