




Indicative image

### LIGHT CURTAINS TYPE 4 ACCORDING TO IEC 61496-1 AND IEC 61496-2

- Compact housing (28 x 30 mm) and no dead zone on cap side
- Resolution 14 mm for finger protection, 20, 30, 40 mm for hand protection, 50, 90 mm for presence control and 2, 3, 4 beams for body protection/access control
- Controlled distance up to: 3, 4, 6, 10, 12 m
- Base, Standard versions and Master, Slave version to connect up to 3 sets in cascade configuration
- Selectable Automatic/Manual Restart and EDM integrated functions (Standard models)
- Selectable controlled distance
- IP69K protection models (LS4\_K) and models with integrated heating system to reach -25°C operating temperature (LS4\_H)
- Standard M12 da 5 and 8 poles connectors

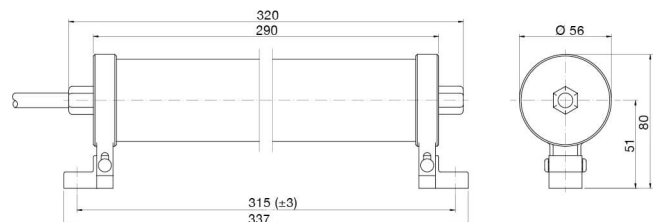

### Datasensing S.r.l.

Strada S.Caterina, 235  
41122 Modena (MO)  
Tel. 059 420411  
Fax 059 253973  
E-mail [info@datasensing.com](mailto:info@datasensing.com)

### date of printing

29/04/2022 17:08:54

