



Model Number


V94-G-SE

Male connector, 7/8" - 16 UN2A, 4-pin, field attachable

Features

- Screw terminal connection
- External connector thread
- Gold plated contacts

Dimensions

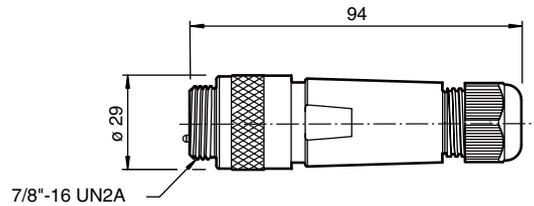

Technical data

General specifications

Number of pins 4

Electrical specifications

Operating voltage U_B max. 600 V

Operating current I_B max. 15 A

Ambient conditions

Ambient temperature -40 ... 90 °C (-40 ... 194 °F)

Mechanical specifications

Degree of protection IP67

Connection 1 x 7/8 inch-16 UN - 2A ; Connector, straight screw terminal for 14 - 22 AWG

Material

Contacts gold plated Cu alloy

Body Polyamide (PA)

Slotted nut nickel-plated brass

Sleeve connector yellow PVC

Cable

Sheath diameter 5 ... 13 mm

Note Male connector thread Length: 3.5 mm
Voltage rating is 600V or the rating of cable, whichever is less

Approvals and certificates

UL approval cULus Listed, General Purpose

Electrical connection

