



# Inductive sensor NBB0,6-4GM22-E1



- 0.6 mm flush
- Miniature design

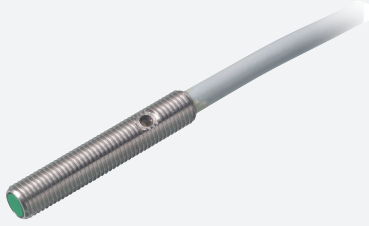

## Dimensions



## Technical Data

| General specifications       |       |                            |
|------------------------------|-------|----------------------------|
| Switching function           |       | Normally closed (NC)       |
| Output type                  |       | NPN                        |
| Rated operating distance     | $s_n$ | 0.6 mm                     |
| Installation                 |       | flush                      |
| Output polarity              |       | DC                         |
| Assured operating distance   | $s_a$ | 0 ... 0.486 mm             |
| Reduction factor $r_{Al}$    |       | 0.4                        |
| Reduction factor $r_{Cu}$    |       | 0.29                       |
| Reduction factor $r_{304}$   |       | 0.76                       |
| Reduction factor $r_{Brass}$ |       | 0.46                       |
| Nominal ratings              |       |                            |
| Operating voltage            | $U_B$ | 10 ... 30 V                |
| Switching frequency          | $f$   | 0 ... 1300 Hz              |
| Hysteresis                   | $H$   | typ. 5%                    |
| Reverse polarity protection  |       | reverse polarity protected |

Release date: 2020-03-23 Date of issue: 2020-03-30 Filename: 220684\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

## Technical Data

|                                                 |       |                                                                            |
|-------------------------------------------------|-------|----------------------------------------------------------------------------|
| Short-circuit protection                        |       | pulsing                                                                    |
| Voltage drop                                    | $U_d$ | $\leq 3 \text{ V}$                                                         |
| Operating current                               | $I_L$ | 0 ... 100 mA                                                               |
| Off-state current                               | $I_r$ | 0 ... 0.1 mA typ. at 25 °C                                                 |
| No-load supply current                          | $I_0$ | $\leq 10 \text{ mA}$                                                       |
| Switching state indicator                       |       | LED, yellow                                                                |
| <b>Compliance with standards and directives</b> |       |                                                                            |
| Standard conformity                             |       |                                                                            |
| Standards                                       |       | EN 60947-5-2:2007<br>IEC 60947-5-2:2007                                    |
| <b>Approvals and certificates</b>               |       |                                                                            |
| UL approval                                     |       | cULus Listed, General Purpose                                              |
| CSA approval                                    |       | cCSAus Listed, General Purpose                                             |
| CCC approval                                    |       | CCC approval / marking not required for products rated $\leq 36 \text{ V}$ |
| <b>Ambient conditions</b>                       |       |                                                                            |
| Ambient temperature                             |       | -25 ... 70 °C (-13 ... 158 °F)                                             |
| <b>Mechanical specifications</b>                |       |                                                                            |
| Connection type                                 |       | cabl PUR , 2 m                                                             |
| Core cross-section                              |       | 0.055 mm <sup>2</sup>                                                      |
| Housing material                                |       | Stainless steel 1.4305 / AISI 303                                          |
| Sensing face                                    |       | PC                                                                         |
| Degree of protection                            |       | IP67                                                                       |

## Connection



## Accessories

|                                                                                     |             |                       |
|-------------------------------------------------------------------------------------|-------------|-----------------------|
|  | <b>BF 4</b> | Mounting flange, 4 mm |
|-------------------------------------------------------------------------------------|-------------|-----------------------|