


AS-Interface printed circuit board module

VBA-4E4A-CB10-ZJ/E1J-FL

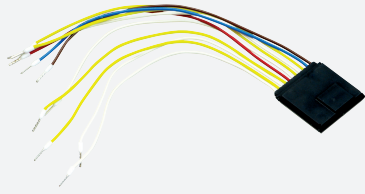

- Integrated communication monitoring function
- Outputs short-circuit and overload proof
- Supply of the inputs and the outputs from AS-Interface
- Function display for bus, inputs and outputs
- Connection via lead

Printed circuit board module 4 inputs/4 outputs




Function

The AS-Interface connecting module is ideal for integrating custom electronics, such as illuminated pushbuttons or LED lights. The PCB is supplied with power entirely via AS-Interface. The inputs and outputs are resistant to short circuits and overloading. The display and control elements and AS-Interface are connected via cable strands. A signal indicating an overload of the outputs is transmitted to the AS-Interface master via the "peripheral fault" function. The communication via AS-Interface remains unaffected.

Note:

A communication monitoring function is integrated into the system. This function disconnects the outputs from the power supply when no communication is taking place on the AS-Interface line.

Dimensions

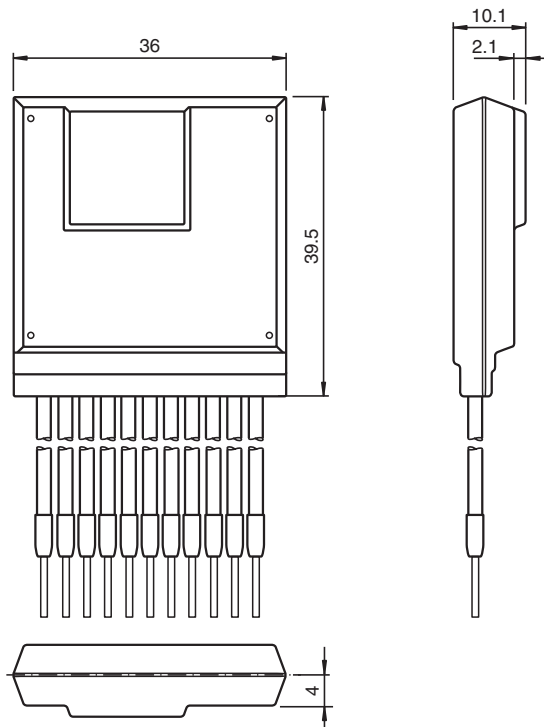

Technical Data

General specifications

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

Technical Data


Slave type	A/B slave	
AS-Interface specification		V3.0
Required master specification		≥ V3.0
UL File Number		E223772
MTBF		267 a
Indicators/operating means		
LED FAULT		error display; LED red red: communication error or address is 0 red flashing: overload of outputs
LED PWR		AS-Interface voltage; green LED green: voltage OK flashing green: address 0
LED IN		switching state (input); 4 LED yellow
LED OUT		Switching state (output); 4 LED yellow
Electrical specifications		
Rated operating voltage	U _e	26.5 ... 31.6 V from AS-Interface (PELV)
Rated operating current	I _e	≤ 40 mA (without inputs/outputs)/max. 160 mA
Protection class		III
Surge protection		U _e : overvoltage category II, safe isolated power supplies (PELV)
Input		
Number/Type		4 inputs for mechanical contacts
Supply		from AS-Interface
Voltage		12 ... 31 V
Input current		≤ 4 mA (limited internally)
Switching point		
0 (unattenuated)		≤ 0.15 mA
1 (attenuated)		≥ 1.3 mA
Signal delay		< 1 ms (input/AS-Interface)
Output		
Number/Type		4 electronic outputs, NPN, overload proof and short-circuit proof
Supply		from AS-Interface
Voltage		12 ... 31 V
Current		≤ 100 mA per output, ≤ 100 mA total
Usage category		DC-1 "general use" (ohmic and weak inductive loads in accordance with IEC 60947)
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 62026-2:2013
Standard conformity		
Degree of protection		EN 60529:2000
Fieldbus standard		EN 62026-2:2013
Emitted interference		EN 61000-6-4:2007
AS-Interface		EN 62026-2:2013
Noise immunity		EN 61000-6-2:2005, EN 61326-1:2006, EN 62026-2:2013
Programming instructions		
Profile		S-7.A.7
IO code		7
ID code		A
ID1 code		7
ID2 code		7
Data bits (function via AS-Interface)		input output
D0		IN1 OUT1
D1		IN2 OUT2
D2		IN3 OUT3
D3		IN4 OUT4

Release date: 2020-03-31 Date of issue: 2020-03-31 Filename: 271298_eng.pdf

Technical Data

Parameter bits (programmable via AS-i)		function
P0		not used
P1		Input filter P1 = 0 input filter on, pulse suppression ≤ 2 ms P1 = 1 input filter off (default settings)
P2		Synchronous mode P2 = 0 synchronous mode on P2 = 1 synchronous mode off (default settings)
P3		not used
Approvals and certificates		
UL approval		Protection class IP20 is not included in the UL approval. The protection class is tested by Pepperl+Fuchs.
Ambient conditions		
Ambient temperature		-25 ... 70 °C (-13 ... 158 °F)
Storage temperature		-25 ... 85 °C (-13 ... 185 °F)
Relative humidity		85 % , noncondensing
Climatic conditions		For indoor use only
Altitude		≤ 5000 m above MSL
Shock and impact resistance		30 g, 11 ms in 6 spatial directions, 3 shocks 10 g, 16 ms in 6 spatial directions, 1000 shocks
Vibration resistance		0.35 mm 10 ... 57 Hz , 5 g, 57 Hz ... 150 Hz, 10 cycles
Pollution degree		2
Mechanical specifications		
Degree of protection		IP20 according to EN 60529
Connection		200 mm, PVC cable 0.5 mm ²
Material		
Housing		Polyamide hot-melt adhesive
Mass		33 g
Note		This device is maintenance-free. If the device is used in a manner not specified by the manufacturer, the protection provided by the device may be impaired.

Connection

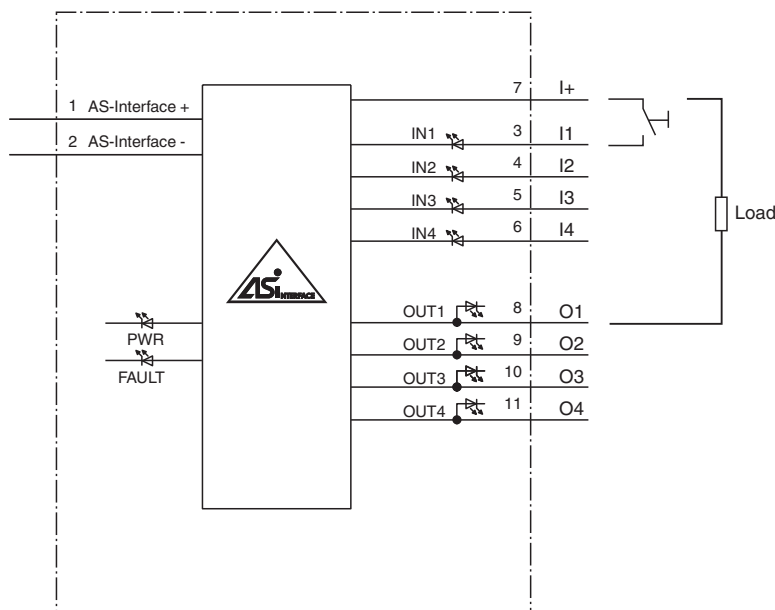

Release date: 2020-03-31 Date of issue: 2020-03-31 Filename: 271298_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".


 Pepperl+Fuchs Group
www.pepperl-fuchs.com

 USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

 Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

 Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

Assembly

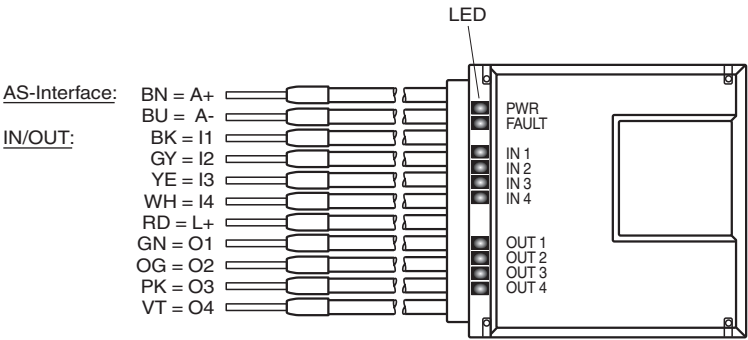

Connection

Do not connect inputs and outputs, which are supplied via the module from AS-interface or via auxiliary power, with power supply and signal circuits with external potentials.