


CD12M/LB-100C5

CD

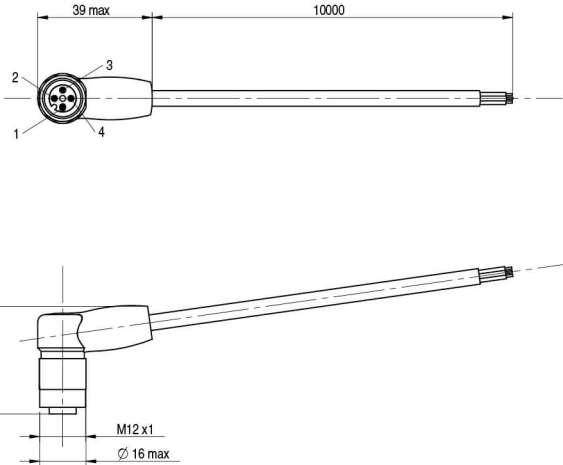

Indicative image

Electrical data

Nominal current	4 A
Led	3 (Supply - PNP output pin 4-2)
Wires	4
Nominal voltage	250 V

Mechanical data

Connections	With open ended wires
Operating temperature	-40°C ... +80°C (fixed installation) -25°C ... +80°C (flexible installation)
1	10
Head type	90°
Plug	M12
Outer diameter	Ø 4,7mm ±0.20mm
Jacket material	TPU
Wire isolation	PP
Bending radius	> 5 x D (fixed installation) > 10 x D (flexible installation)
Model	Femmina


Test/Approvals

Generical Data

Operating Temperature -40°C ... +80°C (fixed installation) -25°C ... +80°C (flexible installation)

Mechanical Protection IP67

ELECTRICAL DIAGRAMS OF THE CONNECTIONS



Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail info@datasensing.com

date of printing

29/04/2022 13:05:02