


CD08/OB-100C5US

CD



Indicative image

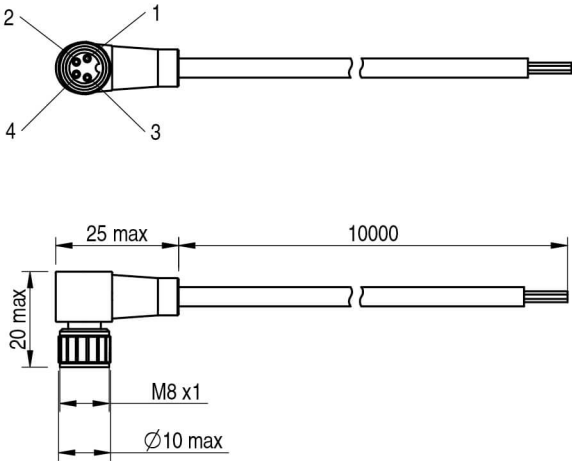

Electrical data

Nominal current	4 A
Led	no
Wires	4
Rated impulse voltage	0,8 kV
Nominal voltage	Max. 30 V ac/dc

Mechanical data

Connections	With open ended wires
Tightening torque	0,4 Nm
Operating temperature	-10°C...+80°C (flexible installation) -25°C...+80°C (fixed installation)
1	10
Head type	90°
Plug	M8
Outer diameter	Ø 4,5 mm ± 5%
Jacket material	PVC CEI 2022 II OR
Wire isolation	PVC
Conductors section	0,25 mm2 (32 x 0,10 mm2)
Model	Femmina

Test/Approvals

Approvals

cCSAus

Degree of protection

IP67

Generical Data

Operating Temperature

-10°C...+80°C (flexible installation) -25°C...+80°C (fixed installation)

Mechanical Protection

IP67

ELECTRICAL DIAGRAMS OF THE CONNECTIONS

BN/1

WH/2

BU/3

BK/4

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail info@datasensing.com

date of printing

29/04/2022 12:38:44