




Indicative image

M5 – M8 – M12 – M18 – M30 INDUCTIVE SENSORS WITH FULL METAL HOUSING



Detection properties

Nominal sensing distance	3mm
Operanting distance	0...2,43mm
Standard target	12x12mm FE360
Correction Factor	Kupfer: 0 / Aluminium: 0 / Messing: 0,1 / rostfreier Edelstahl: 0,53
Thermal drift of Sr	< 10 %
Repeat Accuracy	5% (UB 24V Ta=23°C ±5°C)
Hysteresis	1 ... 20%

Outputs

Output type	PNP
Output Function	NO
Switching frequency	200Hz

Electrical data

Operating Voltage	10...30Vdc
No-Load supply current	≤ 10mA

Load current	≤ 200mA
Leakage current	≤ 10μA
Output voltage drop	≤ 1,5V @200mA
Max ripple content	≤10%
LED indicators	Yellow LED output state
Time delay before availability	≤ 50ms
Short-circuit protection	Yes (auto-reset)
Reverse Polarity Protection	Yes
Protection against inductive loads	Yes

Mechanical data

Mounting	Shielded
Dimensions	M12 x 1 / L = 52mm
Weight	20g
Housing Material	stainless steel AISI316L
Connections	M12 Plug
Active Head Material	stainless steel AISI316L
Tightening torque	10Nm
Operating temperature	-25°C...+70°C
0,25mm	0,50mm
Diameter/Dimension	M12

Test/Approvals

Approvals	CE cULus
EMC compatibility	IEC 60947-5-2
Shocks and vibrations	Vibration IEC 60068-2-6 / Shock IEC 60068-2-27
Degree of protection	IP68, IP69K
IK05	IK05
80bar	80bar


Accessories

Supplied Accessories	2 nuts M12x1
----------------------	--------------


Generical Data

Dimensions	M12 x 1 / L = 52mm
Operating Temperature	-25°C...+70°C
Mechanical Protection	IP68, IP69K


ELECTRICAL DIAGRAMS OF THE CONNECTIONS

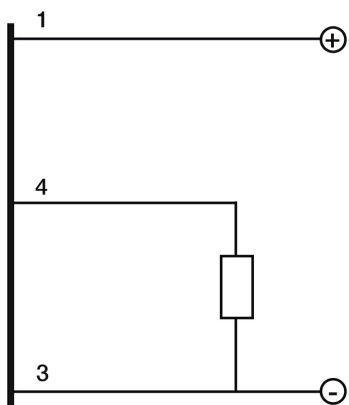

CONNECTOR

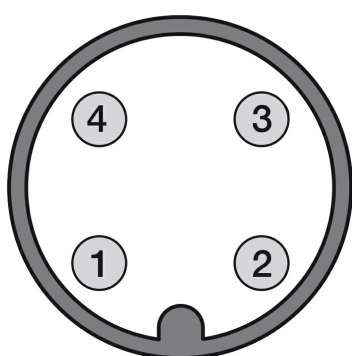


INSTALLATION

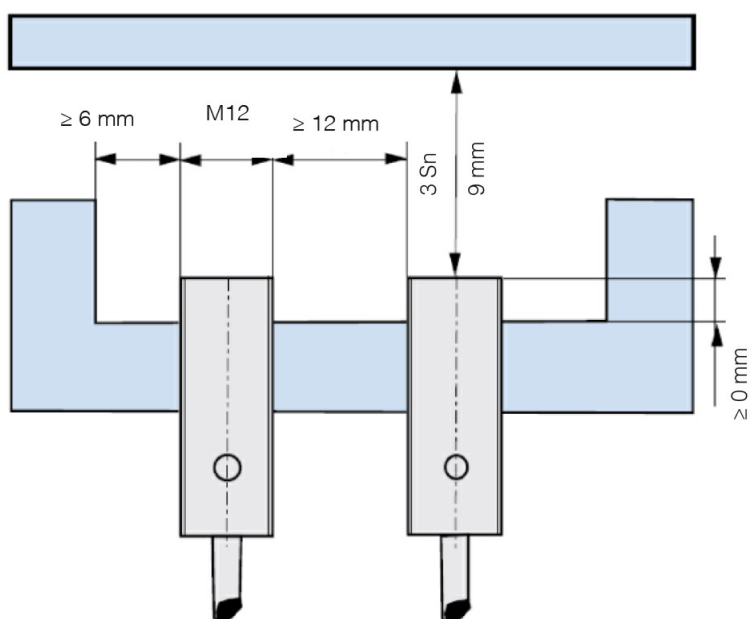

RESPONSE CURVES

Parallel offset

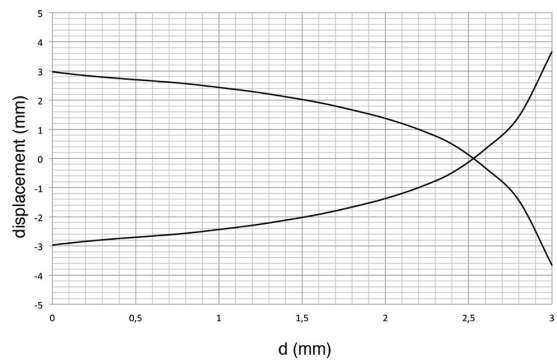

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail info@datasensing.com

date of printing

29/04/2022 08:41:37