

# XS8C1A1PAL2

inductive sensor XS8 40x40x15 - PBT -  
Sn25mm - 12..24VDC - cable 2m



## Main

|                                    |                                                         |
|------------------------------------|---------------------------------------------------------|
| Range of product                   | OsiSense XS                                             |
| Series name                        | General purpose                                         |
| Sensor type                        | Inductive proximity sensor                              |
| Device application                 | -                                                       |
| Sensor name                        | XS8                                                     |
| Sensor design                      | Flat form 40 x 40 x 15                                  |
| Size                               | 15 mm                                                   |
| Body type                          | Fixed                                                   |
| Detector flush mounting acceptance | Non flush mountable                                     |
| Material                           | Plastic                                                 |
| Enclosure material                 | PBT                                                     |
| Type of output signal              | Discrete                                                |
| Wiring technique                   | 3-wire                                                  |
| [Sn] nominal sensing distance      | 15 Mm flush mountable<br>25 mm non flush mountable      |
| Discrete output function           | 1 NO                                                    |
| Output circuit type                | DC                                                      |
| Discrete output type               | PNP                                                     |
| Electrical connection              | Cable                                                   |
| Cable length                       | 2 m                                                     |
| [Us] rated supply voltage          | 12...24 V DC with reverse polarity protection           |
| Switching capacity in mA           | <= 200 mA DC with overload and short-circuit protection |
| IP degree of protection            | IP68 double insulation conforming to IEC 60529          |

## Complementary

|                          |                                                            |
|--------------------------|------------------------------------------------------------|
| Detection face           | Frontal                                                    |
| Front material           | PBT                                                        |
| Fine adjustment zone     | 8...15 Mm flush mountable<br>8...25 mm non flush mountable |
| Differential travel      | 1...15% of Sr                                              |
| Cable composition        | 3 x 0.34 mm <sup>2</sup>                                   |
| Wire insulation material | PvR                                                        |
| Supply voltage limits    | 10...36 V DC                                               |
| Maximum residual current | 1.5 mA open state                                          |
| Switching frequency      | <= 1000 Hz                                                 |
| Maximum voltage drop     | <2 V (closed)                                              |
| Current consumption      | <= 10 mA no-load                                           |
| Maximum delay first up   | 10 ms                                                      |
| Maximum delay response   | 0.3 ms                                                     |
| Maximum delay recovery   | 0.8 ms                                                     |
| Marking                  | CE                                                         |
| Depth                    | 15 mm                                                      |
| Height                   | 40 mm                                                      |
| Width                    | 40 mm                                                      |
| Net weight               | 0.095 kg                                                   |

## Environment

|                                       |                                                                         |
|---------------------------------------|-------------------------------------------------------------------------|
| Product certifications                | UL<br>CSA<br>Ecolab                                                     |
| Ambient air temperature for operation | -25...70 °C                                                             |
| Ambient air temperature for storage   | -40...85 °C                                                             |
| Vibration resistance                  | 25 gn amplitude = +/- 2 mm (f = 10...55 Hz) conforming to IEC 60068-2-6 |
| Shock resistance                      | 50 gn for 11 ms conforming to IEC 60068-2-27                            |

## Packing Units

|                              |          |
|------------------------------|----------|
| Unit Type of Package 1       | PCE      |
| Number of Units in Package 1 | 1        |
| Package 1 Weight             | 128 g    |
| Package 1 Height             | 4.2 cm   |
| Package 1 width              | 9.6 cm   |
| Package 1 Length             | 13.2 cm  |
| Unit Type of Package 2       | S03      |
| Number of Units in Package 2 | 44       |
| Package 2 Weight             | 6.318 kg |
| Package 2 Height             | 30 cm    |
| Package 2 width              | 30 cm    |
| Package 2 Length             | 40 cm    |


## Offer Sustainability

|                            |                                                                                                                                                                                      |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                                                                                                                |
| REACH Regulation           |  <a href="#">REACH Declaration</a>                                                                |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a> |
| Mercury free               | Yes                                                                                                                                                                                  |
| RoHS exemption information |  <a href="#">Yes</a>                                                                              |
| Environmental Disclosure   |  <a href="#">Product Environmental Profile</a>                                                    |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

## Dimensions

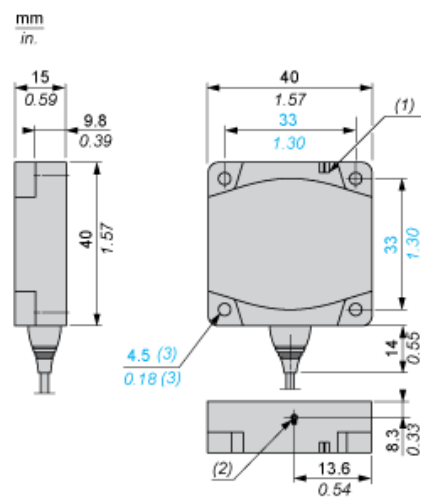

- (1) LED
- (2) Teach mode button
- (3) For CHC type screws

Setting-up

Minimum Mounting Distances (mm)

Side by Side



Face to Face



Facing a Metal Object



|                   | e (1) | e (2) | e (3) |
|-------------------|-------|-------|-------|
| Flush mounted     | 60    | 120   | 15    |
| Not flush mounted | 125   | 250   |       |

---

## Wiring Schemes

---

### PNP



BU : Blue  
BN : Brown  
BK : Black