




## Main

|                               |   |
|-------------------------------|---|
| Range of product              | OsiSense XU                                   |
| Series name                   | General purpose single mode                   |
| Electronic sensor type        | Photo-electric sensor receiver                |
| Sensor name                   | XUB   |
| Sensor design                 | Cylindrical M18                               |
| Detection system              | Thru beam                                     |
| Material                      | Metal   |
| Line of sight type            | Axial   |
| Type of output signal         | Discrete                                      |
| Supply circuit type           | DC  |
| Wiring technique              | 3-wire  |
| Discrete output type          | PNP   |
| Discrete output function      | 1 NO  |
| Electrical connection         | Cable   |
| Cable length                  | 5 m   |
| Product specific application  | -   |
| Emission                      | Infrared thru beam                            |
| [Sn] nominal sensing distance | 15 m thru beam need a transmitter XUB2BKSNL5T |

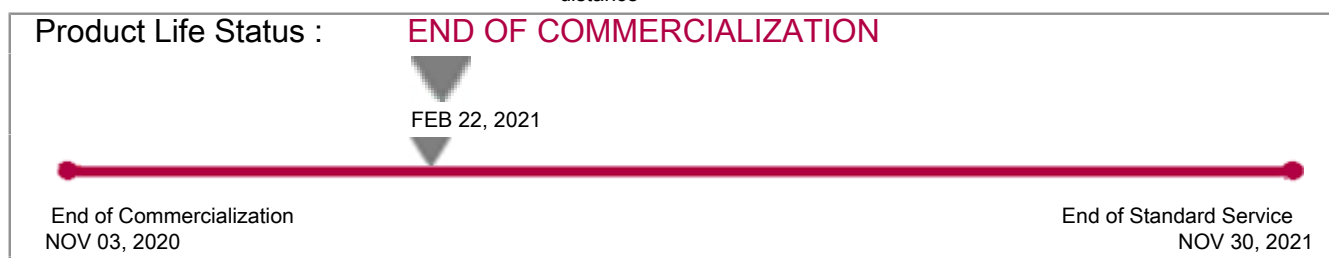

## Complementary

|                           |   |
|---------------------------|---|
| Enclosure material        | Nickel plated brass                               |
| Lens material             | PMMA  |
| Maximum sensing distance  | 20 m thru beam                                    |
| Output type               | Solid state                                       |
| Add on output             | Without   |
| Wire insulation material  | PvR   |
| Status LED                | 1 LED (yellow) for output state                   |
| [Us] rated supply voltage | 12...24 V DC with reverse polarity protection     |
| Supply voltage limits     | 10...36 V DC                                      |
| Switching capacity in mA  | <= 100 mA (overload and short-circuit protection) |
| Switching frequency       | <= 500 Hz   |

|                        |                                |
|------------------------|--------------------------------|
| Maximum voltage drop   | <1.5 V (closed state)          |
| Current consumption    | 35 mA no-load                  |
| Maximum delay first up | 15 ms                          |
| Maximum delay response | 1 ms                           |
| Maximum delay recovery | 1 ms                           |
| Setting-up             | Without sensitivity adjustment |
| Diameter               | 18 mm                          |
| Length                 | 46 mm                          |






## Environment

|                                       |  |
|---------------------------------------|--|
| Product certifications                | UL<br>CSA<br>CE  |
| Ambient air temperature for operation | -25...55 °C  |
| Ambient air temperature for storage   | -40...70 °C  |
| Vibration resistance                  | 7 gn, amplitude = +/- 1.5 mm (f = 10...55 Hz) conforming to IEC 60068-2-6                        |
| Shock resistance                      | 30 gn (duration = 11 ms) conforming to IEC 60068-2-27  |
| IP degree of protection               | IP65 double insulation conforming to IEC 60529<br>IP67 double insulation conforming to IEC 60529 |

## Packing Units

|                  |          |
|------------------|----------|
| Package 1 Weight | 0.191 kg |
| Package 1 Height | 1.300 dm |
| Package 1 width  | 0.950 dm |
| Package 1 Length | 0.660 dm |

## Offer Sustainability

|                            |  |
|----------------------------|--|
| Sustainable offer status   | Green Premium product  |
| REACH Regulation           |  <a href="#">REACH Declaration</a>  |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a> |
| Mercury free               | Yes  |
| RoHS exemption information |  <a href="#">Yes</a>  |
| Environmental Disclosure   |  <a href="#">Product Environmental Profile</a>  |
| Circularity Profile        |  <a href="#">End of Life Information</a>  |


## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

---

Dimensions

---



---

## Wiring Schemes

---

### PNP Outputs



BN : Brown  
BU : Blue  
BK : Black

---

Detection Curves

---

