



T4V10H 335-20ZH

- Metal enclosure
- Design to EN 50041
- 40,5 mm x 76 mm x 38 mm
- 1 Cable entry M 20 x 1.5
- only for positioning tasks
- Wide range of alternative actuators
- Good resistance to oil and petroleum spirit
- Actuator heads can be repositioned by 4 x 90°

Data

Ordering data

T4V10H 335-20ZH

101082558

eCl@ss number, Version 9.0

27-27-06-01

General data

Product name	T 335 rod lever 10H
Housing construction form	Norm construction design
Enclosure material	Aluminium
Enclosure coating material	painted
Material of the contacts, electrical	Silver
Lever material	Metal film
Material of the rod	Plastic

General data - Features

Number of auxiliary contacts	2
------------------------------	---

Safety appraisal

BG-GS-ET-15
ISO 13849-1
EN 60947-5-1

Mission Time	20 Year(s)
--------------	------------

Mechanical data

Actuating element	Rod lever
Mechanical life, minimum	30,000,000 Operations
Actuating speed, maximum	2.5 m/s
Note (Actuating speed)	Actuating speed with actuating angle 30° to switch axis
Note (Switchover time)	Switchover time in accordance with actuating speed
Actuating torque, minimum	0.3 Nm

Mechanical data - Connection technique

Terminal Connector	Screw connection 0.75 mm ² 2.5 mm ²
Note (Cable section)	All indications about the cable section are including the conductor ferrules.

Mechanical data - Dimensions

Length x Width x Height	Height of sensor: 111.5 mm (without rod)
Length of sensor	38 mm
Width of sensor	40.5 mm

Ambient conditions

	IP67
Ambient temperature, minimum	-30 °C
Ambient temperature, maximum	+80 °C

Ambient conditions - Insulation value

Rated impulse withstand voltage	6 kV
---------------------------------	------

Electrical data

Thermal test current	10 A
Required rated short-circuit current to EN 60947-5-1	1,000 A
Utilisation category AC-15	230 VAC
Utilisation category AC-15	4 A
Utilisation category DC-13	24 VDC
Utilisation category DC-13	4 A
Switching element	Normally open contact (NO)
Switching principle	Slow action with staggered contacts
Bounce duration, maximum	2 ms
Switching frequency	5,000 /h

Notes

Note (General)

Switch with 2 NO contacts are not for security tasks

Ordering code

Product type description:

(1)(2) 3(3)5-(4)Z(5)-(6)-(7)-(8)-(9)

(1)

Z Snap action

T Slow action (not available for AF/S)

(2)

S Plunger S

R Roller plunger R

H Roller lever H

10H Rod lever 10H

7H Roller lever 7H

1K Offset roller lever 1K

3K Angle roller lever 3K

RMS Brass roller

(3)

3 slim design

5 large design

(4)

11 1 NO contacts/1 NC contact

02 2 NC contact

20 2 NO contacts (not suitable for safety applications)

01/01 1 NC contact left / 1 NC contact right

12 1 NO contact/2 NC contacts

03 3 NC contact

(5)

H Slow action with staggered contacts

UE Slow action with overlapping contacts

(6)

G24 with LED

(7)

without Cable entry M20

NPT	Cable entry NPT 1/2"
ST	M12 connector with A-coding (Caution! According to EN 60204-1, the versions with connector must only be used in PELV circuits.)
ST-2310	M12 connector with B-coding (Caution! According to EN 60204-1, the versions with connector must only be used in PELV circuits.)

(8)

2138 Roller lever 7H for position switches with safety function

(9)

1637 Gold-plated contacts

Pictures

Photo/Product/Catalogue




ID: k335hf03

| 127,1 kB | .png | 74.083 x 213.431 mm - 210 x 605 Pixel - 72 dpi

| 485,2 kB | .jpg | 155.222 x 447.322 mm - 440 x 1268 Pixel - 72 dpi

Dimension/Product/Basic




ID: 1-335g01

| 105,8 kB | .jpg | 352.778 x 245.886 mm - 1000 x 697 Pixel - 72 dpi

| 4,5 kB | .png | 74.083 x 51.506 mm - 210 x 146 Pixel - 72 dpi

| 96,7 kB | .cdr |

Diagramm/Product/Travel




ID: kh335s12

| 23,8 kB | .cdr |

| 1,6 kB | .png | 74.083 x 23.283 mm - 210 x 66 Pixel - 72 dpi


| 44,2 kB | .jpg | 352.778 x 111.478 mm - 1000 x 316 Pixel - 72 dpi

Graphic/Product/Contact

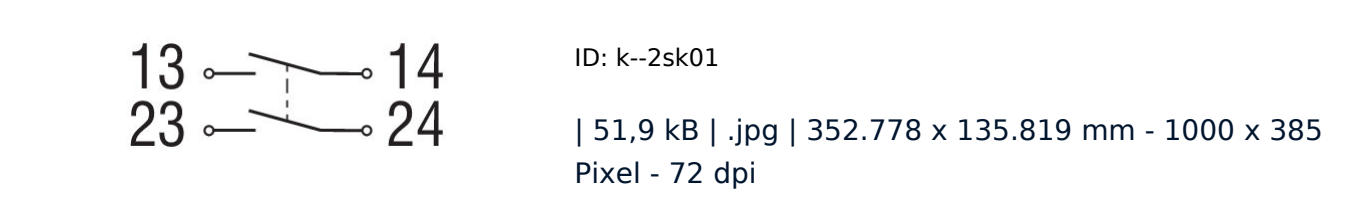

| 51,9 kB | .jpg | 352.778 x 135.819 mm - 1000 x 385
Pixel - 72 dpi

Dimension/Product/Actuator

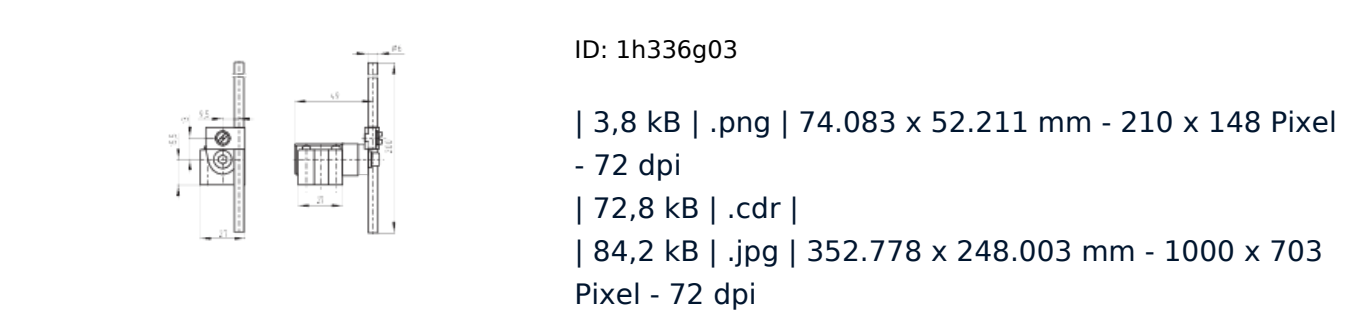

| 3,8 kB | .png | 74.083 x 52.211 mm - 210 x 148 Pixel
- 72 dpi

| 84,2 kB | .jpg | 352.778 x 248.003 mm - 1000 x 703
Pixel - 72 dpi

K.A. Schmersal GmbH & Co. KG, Möddinghofe 3, D-42279 Wuppertal
The details and data referred to have been carefully checked. Images may diverge from original. Further technical data can be found in the manual. Technical amendments and errors possible.
Generated on 312021-01-31T04:42:31+01:00401Europe/BerlinSun, 31 Jan 2021 04:42:31
+010031amSunday.31am31Europe/BerlinCET4201Europe/BerlinJanuary2021Sun, 31 Jan 2021 04:42:31
+010001am31

Generated on 312021-01-31T04:42:31+01:000401Europe/BerlinSun, 31 Jan 2021 04:42:31
+010031amSunday.31am31Europe/BerlinCET4201Europe/BerlinJanuary2021Sun, 31 Jan 2021 04:42:31
+010001am31

```
+010031amSunday.31am31Europe/BerlinCET4201Europe/BerlinJanuary2021Sun, 31 Jan 2021 04:42:31
+010001am31
```

+010001am31

+010001am31