

RFID Transponder


IQC35-10 50pcs



- Operating frequency 13.56 MHz
- Conforms to ISO 15693
- 64 bit Fixcode
- 1280 bits memory available
- Degree of protection IP68
- Readable and writable from both sides

Data carrier

Dimensions



Technical Data

General specifications		
Operating frequency		13.56 MHz
Transfer rate		26 kBit/s
Memory		
Chip Type		ICODE SLIX-S (NXP)
EEPROM		1280 Bit
UID		64 Bit
Memory organization		4 bytes/block
Read cycles		unlimited
Write cycles		> 100000
Data retention period		10 years
Directive conformity		
Radio equipment		
Directive 2014/53/EU		EN 300330
RoHS		
Directive 2011/65/EU (RoHS)		EN 50581

Release date: 2020-03-26 Date of issue: 2020-03-27 Filename: 289133_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

Technical Data

Standard conformity

Degree of protection	EN 60529
RFID	ISO/IEC 15693-1 ISO/IEC 15693-2 ISO/IEC 15693-3 ISO/IEC 18000-3


Ambient conditions

Ambient temperature	-25 ... 90 °C (-13 ... 194 °F)
Storage temperature	-25 ... 90 °C (-13 ... 194 °F)

Mechanical specifications

Degree of protection	IP68
Material	
Housing	PA9T
Installation	
In air	yes
Mass	≤ 1 g
Construction type	Cylindrical
Note	Packaging unit, 50-piece

Reading range in air IQC35-10

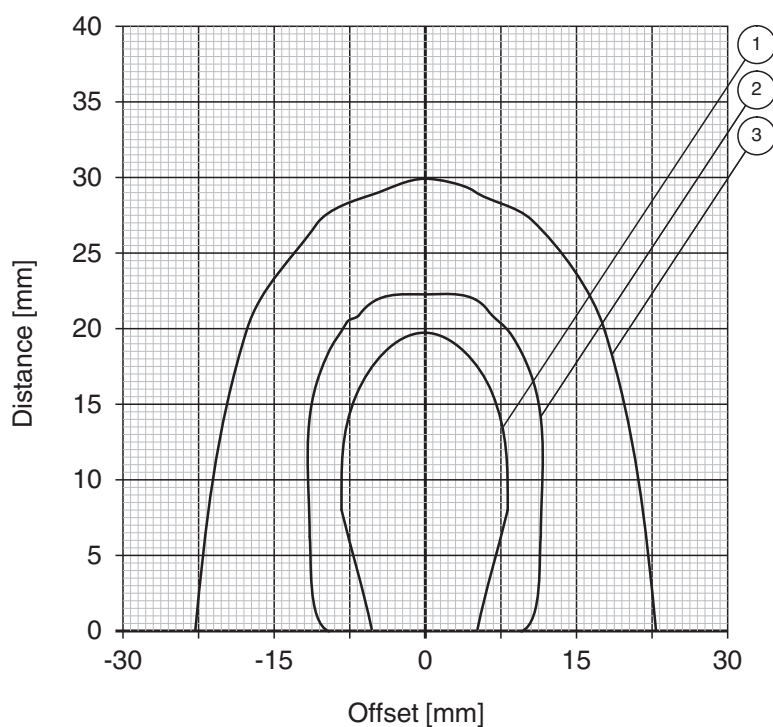

- ① IQH1-18GM-V1 ② IQH1-F61-V1 ③ IQH1-FP-V1
 ④ IQH1-F15-V1

Application

The transponder can be read and written from either side.

Release date: 2020-03-26 Date of issue: 2020-03-27 Filename: 289133_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**