


## Inductive distance measuring sensors

IWFM 20I9503/S35

### dimension drawing

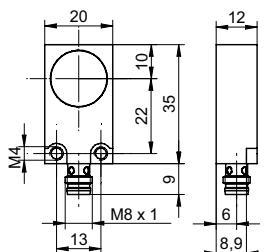

### general data

mounting type	flush
measuring distance Sd	2 ... 3 mm
reference distance	2,35 ... 2,65 mm
measuring speed	< 1 mm / ms
repeat accuracy	< 0,01 mm
linearity error	± 60 µm
temperature coefficient	1 µm / (K mm)


### photo



### electrical data

voltage supply range +Vs	15 ... 30 VDC
current consumption max. (no load)	35 mA
output circuit	current output
output signal	4 ... 20 mA
load resistance +Vs min.	< 500 Ohm
load resistance +Vs max.	< 1000 Ohm
residual output ripple	< 0,5 % Vs
short circuit protection	yes
reverse polarity protection	yes

### connection diagram

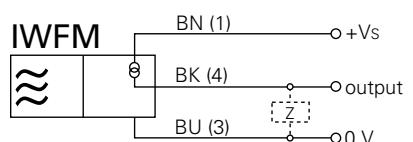

### mechanical data

type	rectangular
housing material	brass nickel plated
dimension	20 mm
housing length	35 mm
connection types	connector M8



### ambient conditions

operating temperature	0 ... +60 °C
protection class	IP 67