

CP08MHT80

LASER


Part Number



- **High resolution: 8 μm (resolution-mode)**
- **Linearity: 0,1 % (resolution-mode)**
- **Measured value independent of material, color and brightness**
- **Response time: < 660 μs (speed-mode)**
- **Zoom function**

These sensors work with a high-resolution CMOS line and DSP technology and determine distance using angular measurement. As a result, material, color and brightness related measurement differences are virtually eliminated.

Integrated analogue output can be configured for voltage 0...10 V (10...0 V) or current 4...20 mA (20...4 mA).

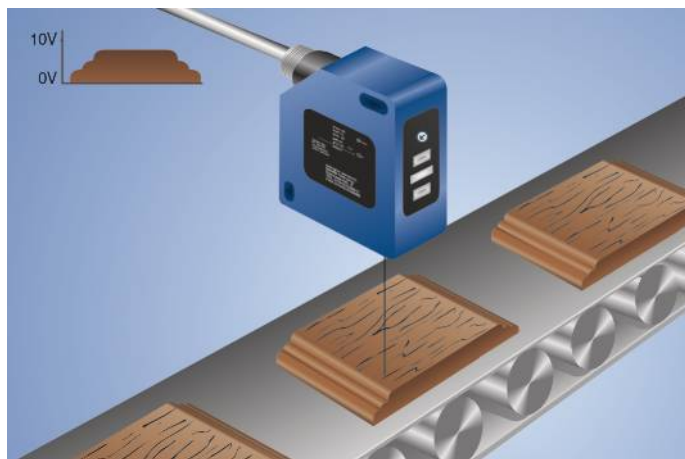

Technical Data

Optical Data

Working Range	30...80 mm
Measuring Range	50 mm
Resolution	8 μm
Resolution (Speed-Mode)	12 μm
Linearity	0,1 %
Linearity (Speed-Mode)	0,2 %
Light Source	Laser (red)
Wavelength	660 nm
Service Life (T = +25 °C)	100000 h
Laser Class (EN 60825-1)	2
Max. Ambient Light	10000 Lux
Light Spot Diameter	see Table 1

Electrical Data

Supply Voltage	18...30 V DC
Current Consumption (U _b = 24 V)	< 80 mA
Measuring Rate	1500 /s
Measuring Rate (Resolution-Mode)	600 /s
Response Time	< 660 μs
Response Time (Resolution Mode)	< 1660 μs
Temperature Drift	< 5 $\mu\text{m/K}$
Temperature Range	-25...50 °C
Analog Output	0...10 V/4...20 mA
Load Current Voltage Output	< 1 mA
Current Output Load Resistance	< 500 Ohm
Interface	RS-232
Baud Rate	38400 Bd
Protection Class	III
FDA Accession Number	0820588-000

Mechanical Data

Setting Method	Teach-In
Housing Material	Plastic
Degree of Protection	IP67
Connection	M12 × 1; 8-pin

Safety-relevant Data


MTTFd (EN ISO 13849-1)	713,97 a
------------------------	----------

Error Output	●
Analog Output	●
RS-232 Interface	●


Connection Diagram No.	529
Control Panel No.	P7
Suitable Connection Equipment No.	80
Suitable Mounting Technology No.	380

Complementary Products


Analog Evaluation Unit AW02
Fieldbus Gateway ZAGxxxN01, EPGG001
Interface Cable S232W3
Protective Housing ZSV-0x-01
Set Protective Housing ZSP-NN-02
Software

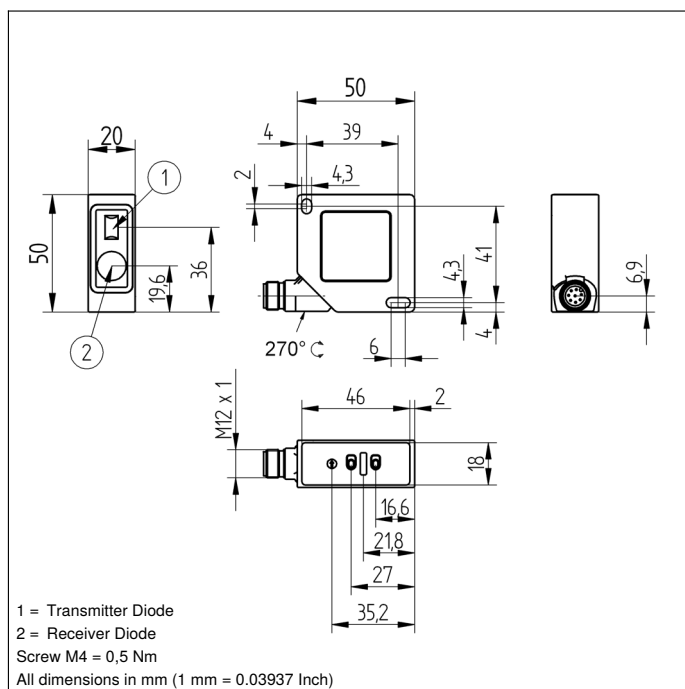

Ctrl. Panel



- 03 = Error Indicator
07 = Selector Switch
12 = Analog Output Indicator
24 = Plus Button
25 = Minus Button
63 = Analog Output Current Indicator

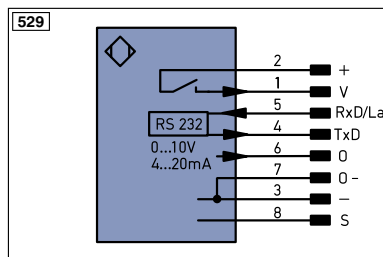

Legend

+	Supply Voltage +
-	Supply Voltage 0 V
~	Supply Voltage (AC Voltage)
A	Switching Output (NO)
Ā	Switching Output (NC)
V	Contamination/Error Output (NO)
Ṽ	Contamination/Error Output (NC)
E	Input (analog or digital)
T	Teach Input
Z	Time Delay (activation)
S	Shielding
RxD	Interface Receive Path
TxD	Interface Send Path
RDY	Ready
GND	Ground
CL	Clock
E/A	Output/Input programmable
IO-Link	IO-Link
PoE	Power over Ethernet
IN	Safety Input
OSSD	Safety Output
Signal	Signal Output
BL_D+/-	Ethernet Gigabit bidirect. data line (A-D)
EN0 r5422	Encoder 0-pulse 0-0 (TTL)


PT	Platinum measuring resistor
nc	not connected
U	Test Input
Ū	Test Input inverted
W	Trigger Input
W-	Ground for the Trigger Input
O	Analog Output
O-	Ground for the Analog Output
BZ	Block Discharge
AWV	Valve Output
a	Valve Control Output +
b	Valve Control Output 0 V
SY	Synchronization
SY-	Ground for the Synchronization
E+	Receiver-Line
S+	Emitter-Line
±	Grounding
SrR	Switching Distance Reduction
Rx+/-	Ethernet Receive Path
Tx+/-	Ethernet Send Path
Bus	Interfaces-Bus A(+)/B(-)
La	Emitted Light disengageable
Mag	Magnet activation
RES	Input confirmation
EDM	Contactur Monitoring

ENAr5422	Encoder A/Ā (TTL)
ENBr5422	Encoder B/B̄ (TTL)
ENa	Encoder A
ENb	Encoder B
AMIN	Digital output MIN
AMAX	Digital output MAX
AOK	Digital output OK
SY in	Synchronization In
SY OUT	Synchronization OUT
OLt	Brightness output
M	Maintenance
rsv	reserved
Wire Colors according to IEC 60757	
BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink
GNYE	Green/Yellow

Table 1

Working Distance	30 mm	80 mm
Spot Size	0,5 × 1 mm	1 × 2 mm

Output Graph

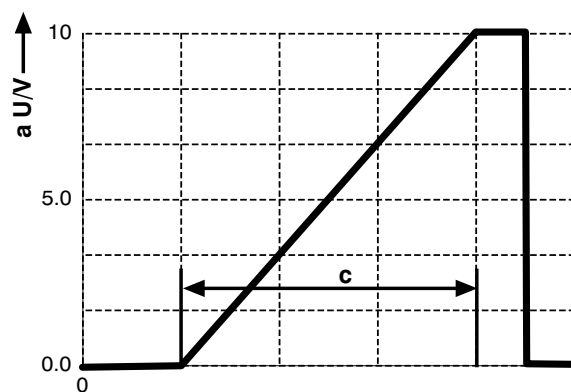

c = Measuring Range

a = Analog Voltage Output

