


CD12M/0H-150A3

CD

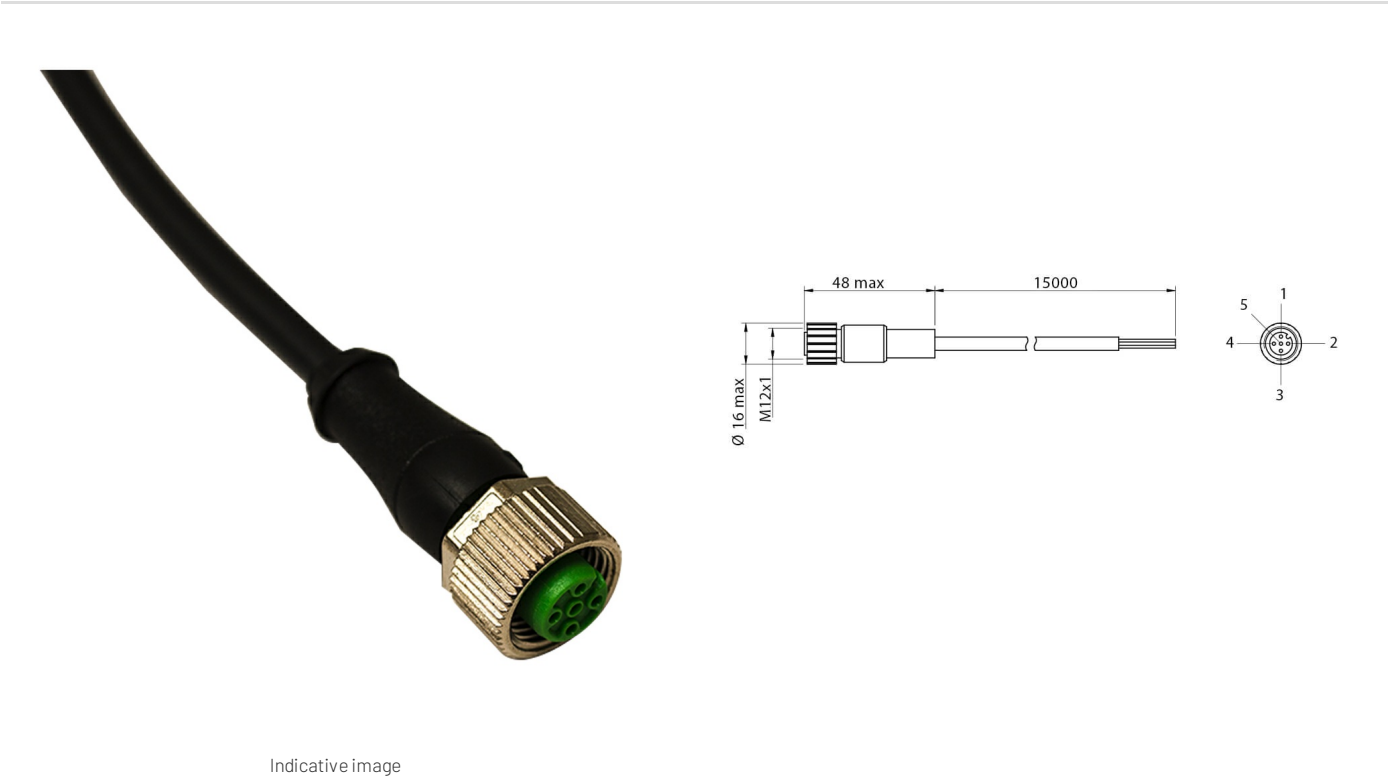

Indicative image

Application

Usable with

Safety light curtains: • LS2 BASE (TX and RX) • LS2 STANDARD (TX) • LS4 BASE (TX and RX) • LS4 STANDARD (TX) Safety sensors: • SH and TH • SH-IC and TH-IC

Installation	M12 5 poles axial female connector
--------------	------------------------------------

Electrical data

Led	no
Wires	5

Mechanical data

Connections	With open ended wires
1	15
Head type	Axial
Plug	M12
Jacket material	PVC
Model	Female

Test/Approvals

Degree of protection	IP67
----------------------	------

Generical Data

Mechanical Protection	IP67
-----------------------	------

ELECTRICAL DIAGRAMS OF THE CONNECTIONS

BN/1 _____

WH/2 _____

BU /3 _____

BK /4 _____

GY /5 _____

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail info@datasensing.com

date of printing

29/04/2022 12:56:27