

#### overview

- Outstanding reliability and unrivalled immunity against ambient light
- Baumer PinPoint LED: Small, homogeneous light spot with sharp edges
- Extra range - best-in-class
- Manipulation-proof, simple teach-in via qTeach or line teach
- IO-Link for extended parameterization options and additional diagnostic data
- Robust housing with stainless steel spacer sleeves



#### Technical data

general data		electrical data	
type	background suppression	output function	light / dark operate
light source	pulsed PinPoint LED	output circuit	push-pull
sensing distance Tw	20 ... 175 mm	output current	< 50 mA
sensing range Tb	3 ... 192 mm	short circuit protection	yes
smallest object recognizable typ.	1 mm at 100 mm	reverse polarity protection	yes
alignment / soiled lens indicator	flashing output indicator	communication interface	
power on indication	LED green	baud rate	230,4 kBaud (COM 3)
output indicator	LED yellow	adjustable parameters	switching point switching hysteresis time filters LED status indicators output logic counter operation mode deactivate the sensor element Find Me function Teach-in mode
sensing distance adjustment	Teach-in and IO-Link	IO-Link port type	Class A
wave length	644 nm	process data length	32 Bit
suppression of reciprocal influence	yes	process data structure	Bit 0 = SSC1 (presence) Bit 2 = quality Bit 3 = alarm Bit 5 = SSC4 (counter) Bit 16-31 = 16 Bit measurement
beam type	point	interface	IO-Link V1.1
alignment optical axis	< 1,5°		
electrical data			
response time / release time	< 0,25 ms (High Speed Mode)		
jitter	< 0,06 ms (High Speed Mode)		
voltage supply range +Vs	10 ... 30 VDC		
current consumption max. (no load)	40 mA (@ 10 VDC)		
current consumption typ.	16 mA (@ 24 VDC)		
voltage drop Vd	< 2 VDC		

## O200.GP-GW1J.72CV/B005

Diffuse sensors with background suppression - miniature

Article number: 11228019

### Technical data

#### communication interface

additional data	excess gain
	operating cycles
	device temperature

cycle time	≥ 0,6 ms
------------	----------

#### mechanical data

width / diameter	8 mm
height / length	25,1 mm
depth	15,8 mm
type	rectangular


#### mechanical data

mechanical mounting	sleeve smooth (stainless steel)
housing material	plastic (ASA, PMMA)
front (optics)	PMMA
connection types	cable 4 pin, 2 m
cable characteristics	PVC / PVC 4 x 0,08 mm <sup>2</sup>


#### ambient conditions

operating temperature	-25 ... +50 °C
protection class	IP 67


### dimension drawing

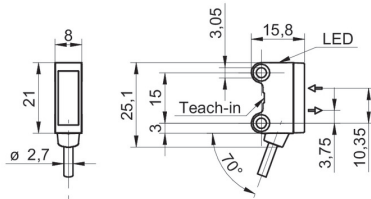


### connection diagram

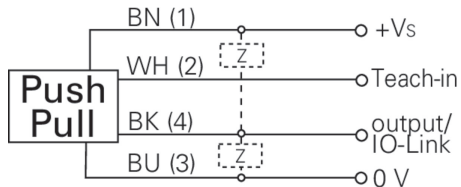

### beam characteristic (typically)

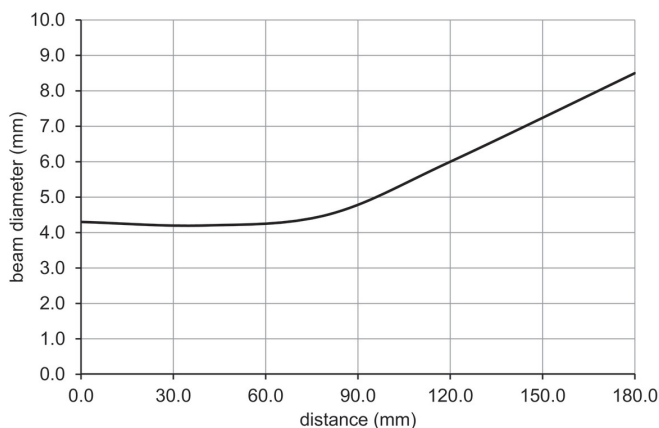

### sensing distance diagram

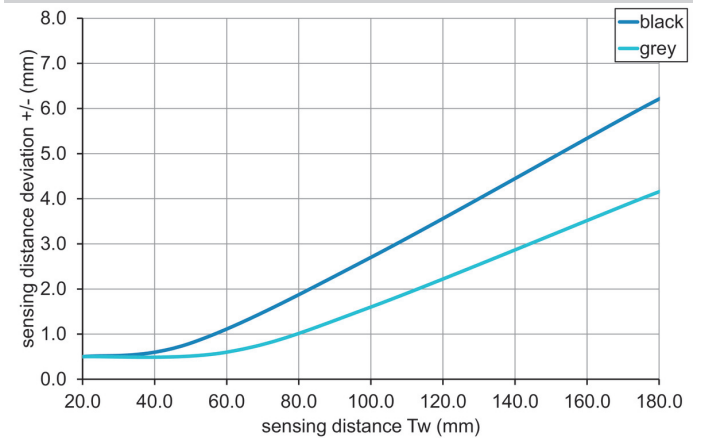

### hysteresis curve

