

Technical Data

Indicators/operating means

Function indicator	1 yellow LED for each sensor lights when object is detected
--------------------	---

Electrical specifications

Operating voltage	U_B	24 V DC
Ripple		max. 10 %
No-load supply current	I_0	see table "Variants"
Protection class		III

Input

Function input	Clock, transmitter activation
----------------	-------------------------------

Output

Switching type	light-on
Signal output	1 NPN per sensor in OR gate Not short-circuit proof
Switching voltage	max. 30 V DC
Switching current	max. 200 mA , resistive load
Switching frequency	f 6 Hz
Response time	85 ms

Conformity

Product standard	EN 60947-5-2
------------------	--------------

Approvals and certificates

Protection class	III
CCC approval	CCC approval / marking not required for products rated ≤ 36 V


Ambient conditions

Ambient temperature	-25 ... 60 °C (-13 ... 140 °F)
Storage temperature	-40 ... 70 °C (-40 ... 158 °F)

Mechanical specifications

Housing width	20 mm
Housing depth	30.5 mm
Housing length L	see table "Variants"
Degree of protection	IP54
Connection	150 mm fixed cable with plug, M12 x 1, 5-pin
Material	
Housing	extruded aluminum section , Silver anodized
Optical face	Plastic pane , Polycarbonate
Cable length	0.15 m

Connection Assignment




Wire Colors and Pinout Information

1	BN	U_B
2	WH	Data (CLK)
3	BU	0 V
4	BK	NPN output, light-on, not short-circuit proof
5	GY	"Data" input (emitter selection)

Wire colors in accordance with EN 60947-5-2

Characteristic Curve

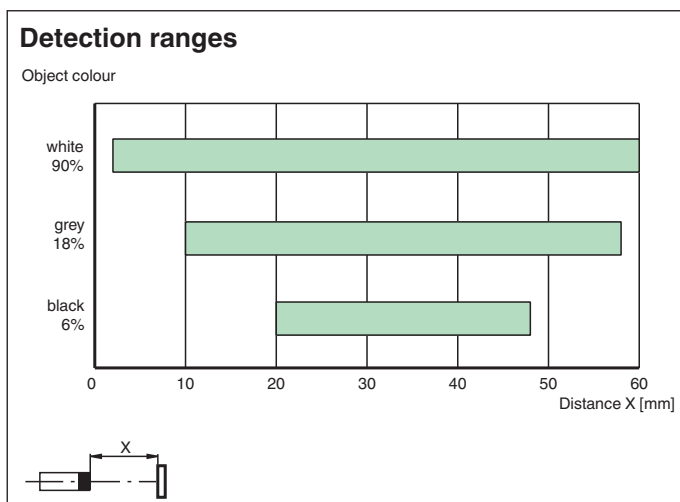

Matching system components

	Maincontroller ICO300-E3815	Industrial PC
	ST56EL-ETN- BZ-3-24-RAG	LED Ethernet stack light, 3 colors, 24 VDC
	LGT Lane-Control	Shelf controller with display module for LGT series sensing strip
	HLG-240H-24ABL	Power supply, 230 VAC/24 VDC, nominal power 240 W, rated output current 10 A

Accessories

	MH-LGT-013	Mounting aid for LGT sensing strip
	MH-LGT-02	Mounting aid for LGT sensing strip

Safety Information



Note!

Property damage due to wrong connection sequence

If you connect the product to electrical equipment while voltage is applied, this leads to damage of the electronic components contained.

Never connect the product to other electrical equipment while voltage is applied.



Note!

Use with or without earthing connection.

If a connection to the protective equipotential bonding is to be provided for the product in the electrical installation, you can install an earthing set for this purpose.

For use in SELV circuits, install the product insulated. In this case, do not connect the product to a protective equipotential bonding system.

Product Versions

Variants

Profile Model Type	Item no.	L total [mm]	L Profile [mm]	Blind Spot [mm]	No. of Sensors	No Load Current [mA]
OGT110-300-LGT-0,2M-V15-IR	70103303	259	239	91.5	2	< 9
OGT110-500-LGT-0,2M-V15-IR	70103304	459	439	71.5	4	< 18
OGT110-800-LGT-0,2M-V15-IR	70103305	759	739	151.5	6	< 27
OGT110-1000-LGT-0,2M-V15-IR	70103306	959	939	131.5	8	< 36
OGT110-1100-LGT-0,2M-V15-IR	70103307	1105	1085	57.5	10	< 45
OGT110-1200-LGT-0,2M-V15-IR	70103308	1159	1139	111.5	10	< 45
OGT110-1400-LGT-0,2M-V15-IR	70103309	1359	1339	91.5	12	< 54
OGT110-1600-LGT-0,2M-V15-IR	70103310	1559	1539	71.5	14	< 63
OGT110-1900-LGT-0,2M-V15-IR	70103311	1859	1839	151.5	16	< 72
OGT110-2100-LGT-0,2M-V15-IR	70103312	2059	2039	131.5	18	< 81
OGT110-2300-LGT-0,2M-V15-IR	70103313	2259	2239	111.5	20	< 90
OGT110-2500-LGT-0,2M-V15-IR	70103314	2459	2439	91.5	22	< 99
OGT110-2700-LGT-0,2M-V15-IR	70103315	2659	2639	71.5	24	< 108
OGT110-3000-LGT-0,2M-V15-IR	70103316	2959	2939	151.5	26	< 117
OGT110-3200-LGT-0,2M-V15-IR	70103317	3159	3139	131.5	28	< 126
OGT110-3400-LGT-0,2M-V15-IR	70103318	3359	3339	111.5	30	< 135

Accessories

Other suitable accessories can be found at www.pepperl-fuchs.com