

XS1N05PA310S

inductive sensor XS1 M5 - L41mm - brass -
Sn1mm - 5..24VDC - M8



Main

| | |
|------------------------------------|--|
| Range of product | OsiSense XS |
| Series name | General purpose |
| Sensor type | Inductive proximity sensor |
| Device application | - |
| Sensor name | XS1 |
| Sensor design | Cylindrical M5 |
| Size | 41 mm |
| Body type | Fixed |
| Detector flush mounting acceptance | Flush mountable |
| Material | Metal |
| Type of output signal | Discrete |
| Wiring technique | 3-wire |
| [Sn] nominal sensing distance | 1 mm |
| Discrete output function | 1 NO |
| Output circuit type | DC |
| Discrete output type | PNP |
| Electrical connection | Male connector M8, 3 pins |
| [Us] rated supply voltage | 5...24 V DC |
| Switching capacity in mA | <= 100 mA with overload and short-circuit protection |
| IP degree of protection | IP67 conforming to IEC 60529 |

Complementary

| | |
|--------------------------|------------------------------|
| Thread type | M5 x 0.5 |
| Detection face | Frontal |
| Front material | PPS |
| Enclosure material | Nickel plated brass |
| Operating zone | 0...0.8 mm |
| Wire insulation material | PvR |
| Status LED | Output state: 1 LED (yellow) |
| Supply voltage limits | 5...30 V DC |
| Switching frequency | <= 5000 Hz |
| Maximum voltage drop | <2 V (closed) |
| Current consumption | <= 10 mA no-load |
| Maximum delay first up | 5 ms |
| Maximum delay response | 1 ms |
| Maximum delay recovery | 1 ms |
| Marking | CE |
| Threaded length | 24 mm |
| Height | 5 mm |
| Length | 41 mm |
| Net weight | 0.15 kg |






Environment

| | |
|---------------------------------------|---|
| Product certifications | CSA UL |
| Ambient air temperature for operation | -25...70 °C |
| Ambient air temperature for storage | -40...85 °C |
| Vibration resistance | 25 gn amplitude = +/- 2 mm (f = 10...55 Hz) conforming to IEC 60068-2-6 |
| Shock resistance | 50 gn for 11 ms conforming to IEC 60068-2-27 |


Packing Units

| | |
|------------------------------|--------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Weight | 24 g |
| Package 1 Height | 6.7 cm |
| Package 1 width | 9.5 cm |
| Package 1 Length | 4.2 cm |

Offer Sustainability

| | |
|----------------------------|--|
| Sustainable offer status | Green Premium product |
| REACH Regulation |  REACH Declaration |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration |
| Mercury free | Yes |
| RoHS exemption information |  Yes |
| Environmental Disclosure |  Product Environmental Profile |
| Circularity Profile |  End of Life Information |

Dimensions

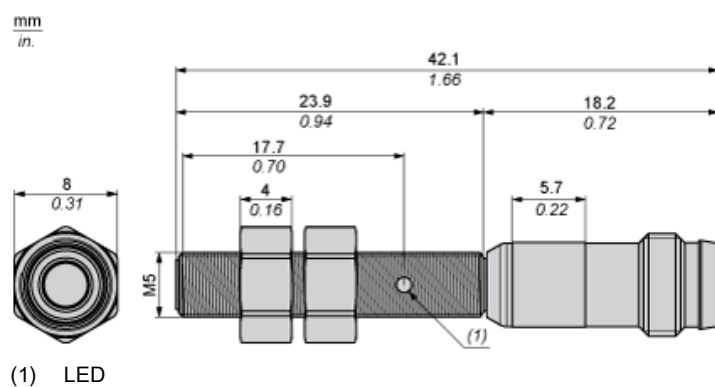

Minimum Mounting Distances in mm


Side by side



e (1) 2 mm/0.79 in.

≥


Face to face

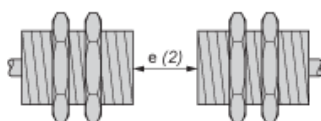

e (2) 12 mm/0.47 in.

≥


Facing a metal object

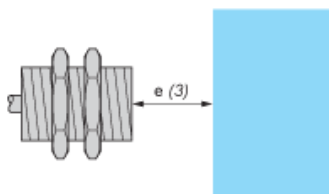

e (3) 3 mm/0.12 in.

≥

Mounted in a metal support




d ≥ 5 mm/0.17 in.

h ≥ 0 mm/0 in.


Tightening torque : 1.6 N.m. (values obtained with washers mounted)

Wiring Schemes

M8 Connector




PNP

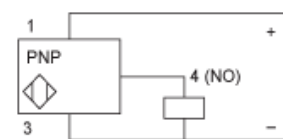

Performance Curves

Standard Steel Target (mm) : 5x5x1

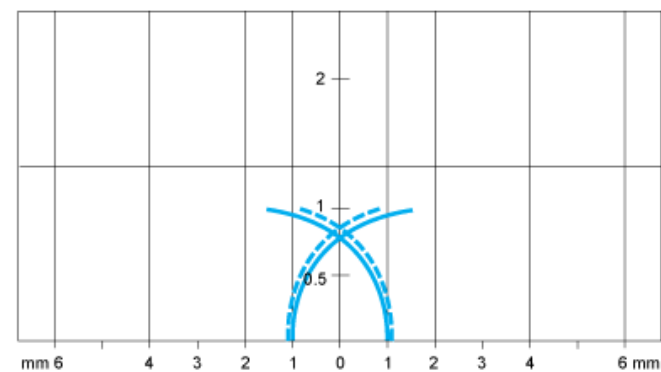

— Pick-up points
--- Drop-out points (object approaching from the side)
(y) Sensing distance in mm