

IR18.D08F-F60.UA1E.7BO

Inductive distance measuring sensors - factor 1 - all metals

Article number: 11170540

overview

- 0 ... 8 mm
- voltage output
- external Teach-in
- connector M12
- -25 ... 75 °C
- IP 67



Technical data

general data

mounting type	flush
special type	linearized factor 1
measuring distance Sd	0 ... 8 mm
sensitivity	1,25 V/mm
resolution	< 0,02 mm (stat.) < 0,03 mm (dynam.)
repeat accuracy	< 0,03 mm
adjustment	external Teach-in
teach	1-point analog, 2-point analog, factory reset
linearity error	± 70 µm
temperature drift	± 3 % (Full Scale; S = 0 ... 6 mm) ± 5 % (Full Scale; S = 0 ... 8 mm)
Teach-Feedback	LED yellow

electrical data

response time (factory characteristic)	< 15 ms
----------------------------------------	---------

electrical data

voltage supply range +Vs	12 ... 36 VDC
current consumption max. (no load)	15 mA
output circuit	voltage output
output signal	0 ... 10 VDC
load resistance	> 4000 Ohm
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	cylindrical threaded
housing material	brass nickel plated
dimension	18 mm
housing length	60 mm
connection types	connector M12
tightening torque max.	40 Nm

ambient conditions

operating temperature	-25 ... +75 °C
protection class	IP 67

remarks


- external Teach-in
- linear analog output
- same measuring distance on all metals (no reduction factor)

IR18.D08F-F60.UA1E.7BO


Inductive distance measuring sensors - factor 1 - all metals

Article number: 11170540

dimension drawing

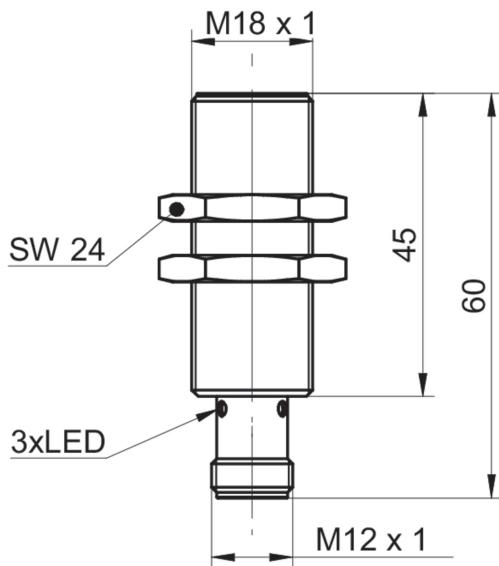

connection diagram

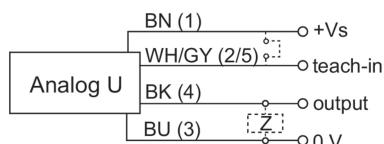

pin assignment

